



THE UNIVERSITY *of* EDINBURGH
School of Geosciences

Richard Gloaguen
Associate Editor, ESURF

July 13, 2016

Dear Dr Gloaguen,

Thank you for considering our manuscript ‘How does grid-resolution modulate the topographic expression of geomorphic processes?’. We would like to thank the four reviewers for their detailed consideration of our work. We have attempted to answer all of the issues raised by the reviews, and where we have not modified the manuscript according to their suggestions, we explain why not.

This document contains our responses to each reviewer in turn, with each reviewer’s comments in **bold type** and our responses in standard type. Following the response to each reviewer, a copy of the manuscript with our changes highlighted is enclosed.

Sincerely,

Stuart W. D. Grieve

Reviewer 1

This manuscript seeks to quantify how well topographic information of varying resolution can be used to extract quantitative information for landscape evolution interpretation and simulation. The authors have crafted a clear goal in this respect and chosen three well-trod soil-mantled landscapes to explore how successive degradation of DEM resolution affects estimates of curvature, slope length, relief, and channel network extent. While the geomorphic community trumpets lidars superior capabilities for these endeavors, the authors are correct in noting that the extent of lidar coverage is limiting (although we should still advocate for global coverage!). This manuscript succeeds because it nicely presents empirical findings and because it incorporates a nifty theoretical explanation for why we lose the ability to resolve features of a given wavelength with changing grid spacing. Below, I describe a small handful of suggestions that should be easily incorporated if so chosen.

We thank the reviewer for their detailed and positive consideration of our work. We are delighted that the reviewer considers the manuscript to be successful in exploring the influence of grid resolution on

geomorphic analysis. We believe that through the discussion points highlighted below, the manuscript has been significantly enhanced, and will consequently be of greater value to a wider audience. At the recommendation of the reviewer we have expanded the introduction to highlight the challenges inherent in comparing different data products, with the aim of giving readers more confidence in the use of lower resolution data products, where appropriate. We have clarified the terminology used throughout the manuscript and highlighted minor points which enhance the interpretation of our curvature results. The spectral analysis section has been expanded to provide a clearer explanation of the equations used, in order to better highlight the relevance of this section to the remainder of the manuscript.

Major comments: 1) Are DEMs of the same grid spacing necessarily equal? The issue of varying DEM grid spacing is the fundamental message of this manuscript and the authors argue for the utility of the results obtained here for interpreting TanDEM-X and SRTM data, but these datasets are derived differently from lidar data and its not clear to me that the exercise laid out here will always be relevant in this respect. In other words, can the authors show that degrading lidar data to 12meters is essentially the same as obtaining a TanDEM-X dataset? Or similarly for a 30-m SRTM dataset? Because we hold up lidar as the gold standard, its appropriate as the reference but it seems that additional factors will likely affect how well radar-based techniques can resolve surface features. It would be highly convincing, for example, if the authors could show that a degraded lidar dataset is consistent with TanDEM-X or SRTM data in a simple way that closes the loop and truly opens the door for widespread use of the principles established in this very fine paper. Perhaps the answer is already known and a simple ‘yes, this works’ can be garnered from the literature.

This direct comparison between data products was something we considered during the planning of this research. We decided to avoid directly testing particular data products as we wanted to show the effect of changes in data resolution, rather than provide a quality estimate for a range of data sources. We agree that such a comparison would be a compelling result to add to this work, however, a full evaluation of the similarity between data products would be beyond the scope of this contribution. The errors between LiDAR data and other data products are region specific, with errors appearing to be connected to landscape morphology and it would be challenging to make a broad conclusion that any SRTM or TanDEM-X data product is globally equivalent to downsampled LiDAR without local scale testing. We have added a brief discussion of these challenges, highlighting the need for further evaluation of these datasets to Section 2.1.

2) **Language:** the manuscript cycles through the terms ‘resolution’ and ‘grid spacing’ in various forms and there are a few places where the meaning can become confusing (e.g., line 497). The word ‘resolution’ is sometimes traded for ‘spacing’, inviting ambiguity and my suggestion is to simplify wherever possible.

We have gone through the manuscript and clarified our terminology, to only refer to increasing or decreasing (grid) resolution, rather than grid sizes or spacing.

3) **Broadly convex hilltops can be resolved with coarse data.** The authors nicely show that curvature at the Gabilan Mesa site is retained as grid spacing increases, which is a very nice result. After seeing more and more of the GM lidar data, it does appear that many sections of that study area exhibit remnant surfaces that are not yet adjusted to regional baselevel lowering, which is a potential bias that could merit mention. That said, I think the result here is nonetheless robust.

We have added a statement into Section 3.1 to highlight this complexity within Gabilan Mesa.

perhaps more importantly, though, I wonder how this result would be useful for a researcher working in a far-flung field area without a priori knowledge of whether their study site exhibits broadly convex hilltops. How would they be able to determine whether they're working with an Oregon Coast Range or Gabilan Mesa like study area? How will they know to trust their curvature values or not?

This will always remain a challenge inherent in desk based research, and if the only data available to a researcher is low resolution topographic data, it would be challenging to be entirely confident in measurements of hilltop curvature. We have added a statement to the discussion (Section 5.1.2) to emphasize this point, although in most cases it would be possible to gain a qualitative understanding of the landscape morphology through other non-topographic datasets.

4) Theoretical explanation for grid spacing dependency on feature resolution. Section 5.1.1. does a very nice job of laying out a spectral analysis-based explanation for this problem. It nicely complements the empirical analysis here but it is terse and challenging to follow. My concern is that readers without a background in signal processing will not be able to follow it. The wonderful outcome in lines 640s to 660s merits much fanfare and is well-stated, but getting there could be much more straightforward. On line 629-634, exactly how does the gain equation show the associations stated, for example? There is no curvature value in this equation (strictly speaking), so the connection b/w gain and the traditional metrics could be more clear. In fact, my sense is that this section would be more effective as a substantial part of the manuscript methodology rather than a theoretical afterthought stuck in the discussion. This analysis is central to the message here and the authors might consider putting it upfront because it bears on all of the empirical results. That said, it would require some hand holding to be effective in that role. In particular, the goal needs to be clearly stated as well as simply stated explanations about wavenumber response function, continuous vs. discontinuous waveforms, and gain. The explanation for fidelity is nicely stated but I fear most readers will have to do substantial work to get there...which would be rewarded if they do so, however! A major rehaul is not the suggestion, but rather a more integrated role for this section. In particular, the very different curvature and slope fidelity curves are highly compelling (fig 12). Because the loss of slope fidelity explains previously published papers, this also strikes me as something that's more meaty than discussion subsection material.

We thank the reviewer for their positive comments about this section. Prior to submission, we debated placing this section in the methods section rather than within the results section. We felt that this led to a more disjointed narrative than is present in the current structure of the manuscript. In other words, we tried what the reviewer suggests and didn't really like the result: the manuscript flows better if the numerical problem is highlighted and then we use the analytical solutions to show why this problem exists. This ensures that the paper's focus is on the practical problem of determining what one can actually say about a low resolution DEM rather than throwing the reader into a cold bath of spectral analysis before any results are reported.

We will follow the reviewer's advice on expanding this section so it becomes (we hope) clearer to readers where the equations have come from and what they mean.

Reviewer 2

The purpose of this work was to analyze the effectiveness of lower resolution topographic data to understand Earth surface processes. In detail, the relationship between curvature and grid resolution is considered, alongside the estimation of the hillslope sediment transport coefficient for each study area. The results suggested that although high resolution (e.g., 1 m) topographic data does yield exciting possibilities for geomorphic research, many key parameters can be understood in lower resolution data, given careful consideration of how analyses are performed. The paper is interesting. Even if we are living in the high-resolution topography age, still we can obtain benefits (in term of understanding Earth surface processes) from low-resolution topographic information.

We are pleased that the reviewer found the manuscript interesting and agree that even in this age of increased access to high resolution topography there is a lot of value in lower resolution data products. We hope that this contribution will assist in highlighting the utility of such datasets, as we continue to bridge the gap between locations with high resolution topography and those without. In responding to this review we have expanded the introduction to highlight that low resolution or downsampled high resolution data has utility as it can better capture processes which occur over larger length scales. We have also clarified the figure captions of a number of figures in order to ensure readers understand the spatial scales employed in visualizing topographic data. In making these changes we believe that the manuscript has the potential to reach a wider audience and has been enhanced by the comments contained in this review.

However, the reason to work with low-resolution data is not only because, as author stated, global lidar coverage cannot be achieved in the near future (Im quite optimistic for the future, technology is evolving very fast and big data is one of the major challenges for this century. . .). I believe that one reason is also because, with larger grid cell size, we can better represent the scale at which few processes occur. I suggest to highlight this in the text; the paper will be benefited from such discussion. I suggest also to read the work of Tarolli and Tarboton (2006), where it was found that, the slope calculated with 10 m DTM (from lidar) allowed a better performance of the shallow landslide model they used. The slope calculated with 2 m DTM was not representative of the scale at which the analyzed shallow landslides occurred. Digital terrain model scales larger than 10 m result in loss of resolution that degrades the results, while for digital terrain model scales smaller than 10 m the physical processes responsible for triggering landslides are obscured by smaller scale terrain variability

We neglected to cover this concept fully within our original manuscript, several allusions were made to the scale dependence of processes and landforms, yet this idea was not clearly stated as a distinct point in the manuscript. We have added a section within the introduction explicitly highlighting this alternative use for low resolution data, using the suggested reference as a case study and tying it in to ideas of selecting window sizes for appropriate spatial averaging of topographic metrics.

The results of this work are in line with such findings: it is possible to estimate suitable sediment transport coefficients also from low-resolution topographic data. The paper is clear and it merits to be published.

I just suggest just few minor changes: - Improve a little the discussion on the grid cell size and the scale at which a physical process occur.

We have extended the introduction to clarify this point. See the response above for more detail.

Fig.1,2,3,6: add the scale bar

These figures are in UTM coordinates and so the axes act as the scale bar. We have not altered the figures, but have clarified this in each figure caption, to ensure that readers understand the scales at which we are representing spatial data.

Reviewer 3

Grieve et al.s study investigates how different spatial resolutions of digital elevation models (DEMs) affect topographic derivatives that are particularly relevant for characterizing geomorphological processes. They place emphasis on the second derivative curvature that is the basis for channel network identification, estimating hillslope diffusivity, and measuring hillslope length and relief. I have rarely received a request for reviewing a paper that is in such good shape. The manuscript is very well written, concise, and the methodology sound. Overall, the conclusions drawn by the authors are well supported by their analysis. Notwithstanding, I have two comments that should be addressed before the manuscript is ready to be published.

We thank the reviewer for such a positive appraisal of our work and we are delighted that the reviewer considers our work to be of a high standard. In addressing the two comments made below we believe that the manuscript has been enhanced, and hope that following the changes outlined below this research will be of greater value to a wider audience.

1. The problem of coarsening resolutions is addressed by downsampling high resolution LiDAR data. However, this approach neglects that DEMs are acquired by different sensors that may generate artefacts due to vegetation, shadowing, foreshortening, etc. These systematic data errors are likely not captured by the local binning algorithm that the authors used to downsample the dense point clouds. My concern is that, now that a globally available DEM with 12 m resolution is available (WorldDEM), researchers may place a possibly to high confidence into the fidelity of that product. The incorporation of this data (or other data sources) into the analysis would provide guidance here.

A similar observation was made by reviewer 1, regarding our ability to compare datasets derived using differing data collection and processing methods. We had initially considered performing such an analysis between differing data products, however, we elected to use downsampled LiDAR data as we wanted to the impact of changes solely in data resolution, isolating potential sources of error identified above, and allowing us to tie our results with the theoretical observations presented in Section 5.1.1. We have added further discussion of these issues and our motivation for the use of LiDAR data to section 2.1, with the aim of ensuring that our work is considered within the proper context.

2. The mathematical treatment of the observed loss of fidelity with increasing spatial resolution appears somewhat misplaced in the discussion. Instead, this part could well serve as a motivation of the study that should be placed at the beginning of section 2.

A similar comment was made by reviewer 1 and our response is copied below:

Prior to submission, we debated placing this section in the methods section rather than within the

results section. We felt that this led to a more disjointed narrative than is present in the current structure of the manuscript. In other words, we tried what the reviewer suggests and didn't really like the result: the manuscript flows better if the numerical problem is highlighted and then we use the analytical solutions to show why this problem exists. This ensures that the paper's focus is on the practical problem of determining what one can actually say about a low resolution DEM rather than throwing the reader into a cold bath of spectral analysis before any results are reported.

Moreover, I think that this part is not intelligible for many who are unfamiliar with wavenumber response functions. Adding more detail here will certainly be thanked by the general readership of ESURF.

We will expand this section to better clarify our use of wavenumber response functions and tie the analysis more closely to the real-world results, with the aim of making this section more accessible to the general readership of ESURF.

Reviewer 4

General comments This paper seeks to determine whether low-resolution (i.e., ≥ 10 m grid cells) can be used to quantify topography relevant to geomorphic processes (channelization, hillslope diffusion, etc.). The authors document the grid-resolution dependence on the median values of curvature, slope, and relief, and on the fidelity of channel head identification algorithms. Their data demonstrates how decreasing grid resolution cuts off extreme values of topographic metrics, a finding well-represented in the literature but never so comprehensively. To explain this effect, they use spectral analysis to show why this effect occurs, and on the basis of this finding, argue that the utility of low-resolution data is highly dependent on the morphology of the study landscape. This argument provides a promising way forward and gives hope for studies based on low-resolution data in landscapes with relatively long hillslopes (landscapes that support much of the human population). The paper is exceptionally well-written and organized; I have a few ideas I would like the authors to consider and a smattering of technical notes that will hopefully improve the clarity of the paper even further.

We thank the reviewer for their thorough and positive appraisal of our work. We appreciate the constructive comments and have addressed them fully below. As a consequence of these comments we have expanded sections of the introduction, discussion and conclusion in addition to improving the clarity of one of the figures. We believe that as a result of these suggestions the manuscript is considerably stronger and will reach a wider audience.

Specific comments 1. In section 2.1, I would like to see more discussion/acknowledgment of or grappling with the issue of gridding point cloud data and potential over-interpolation of Lidar. For example, in the Oregon Coast Range, forests are generally logging company plantings and have exceptionally high canopy density, occasionally limiting bare earth data to a point or two per hillslope, especially on steeper slopes.

We have expanded the discussion in Section 2.1 around the gridding of LiDAR data to reflect this challenge, highlighting the difficulty of generating a high density of ground returns in heavily vegetated areas such as the Oregon Coast Range and justifying our gridding of each dataset to 1 meter resolution

with reference to previous studies.

2. The spectral analysis discussion (section 5.1) comes out of nowhere in the context of the papers organization - its not mentioned at all in the introduction, abstract or methods. Explaining the origin of the grid resolution effect is one of the great strengths of the paper; hence, I would advise more emphasis on these ideas - perhaps a section in the methods or theoretical underpinnings?

We have addressed this issue in response to reviewers 1 and 3 and will expand this section to provide more clarity to readers who are less familiar with these techniques, in addition to better relating the material in Section 5.1 to the rest of the manuscript's results. As recommended we will also add a more explicit statement of the spectral analysis within the abstract and introduction.

3. As noted, I like that the authors provide guidance for a way forward, but I take issue with their concluding assertion on lines 815 - 817. As presented in the paper, constraining the accuracy of coarse resolution results requires having high-resolution data to compare it to, or at the very least, the ability to measure hillslope length (which requires a lot of fieldwork, or high-resolution topography).

In responding to reviewer 1, we have provided more nuance to this idea within the discussion (Section 5.1.2), highlighting that some ancillary data or field exploration will be required in order to evaluate results derived from low resolution data. We have also revised lines 815-817 to reflect this more nuanced conclusion.

Technical notes - Im interested to see what a log-scale on Figure 9 would look like. It seems like all the distributions are skewed and with a log scale we could maybe see more structure around the median value.

We re-plotted the data in Figure 9 using a log scale on the y-axis, it shows little change in the overall patterns with no structure around the median value becoming apparent in any of the 3 hillslope length and relief figures. This additional figure can be found in the public response to reveiwer 4.

The points in Figure 5 are hard to see.

We have replotted this data using increased marker sizes, and have used differing marker shapes in addition to colors to better differentiate between the two datasets.

Section 1.1 labeling is superfluous as there is no section 1.2

This section labeling is a function of the Esurf latex template and should be resolved in the final form of the manuscript.

How does grid-resolution modulate the topographic expression of geomorphic processes?

Stuart W. D. Grieve¹, Simon M. Mudd¹, David T. Milodowski¹, Fiona J. Clubb¹,
and David J. Furbish²

¹School of GeoSciences, University of Edinburgh, Drummond Street, Edinburgh EH8 9XP, UK

²Department of Earth and Environmental Sciences, Vanderbilt University, Nashville, TN, USA

Correspondence to: Stuart W. D. Grieve (s.grieve@ed.ac.uk)

Abstract. In many locations, our ability to study the processes which shape the Earth are greatly enhanced through the use of high resolution digital topographic data. However, although the availability of such datasets has markedly increased in recent years, many locations of significant geomorphic interest still do not have high resolution topographic data available. Here, we aim to constrain how well we can understand surface processes through topographic analysis performed on lower resolution data. We generate digital elevation models from point clouds at a range of grid ~~sizes~~ resolutions from 1 to 30 meters, which covers the range of widely used data resolutions available globally, at three locations in the United States. Using ~~this~~ these data, the relationship between curvature and grid resolution is explored, alongside the estimation of the hillslope sediment transport coefficient (D , in $\text{m}^2 \text{yr}^{-1}$) for each landscape. Curvature, and consequently D , values are shown to be generally insensitive to grid resolution, particularly in landscapes with broad hilltops and valleys. Curvature distributions, however, become increasingly condensed around the mean, and theoretical considerations suggest caution should be used when extracting curvature from landscapes with sharp ridges. The sensitivity of curvature and topographic gradient to grid resolution are also explored through analysis of one dimensional approximations of curvature and gradient, providing a theoretical basis for the results generated using two dimensional topographic data. Two methods of extracting channels from topographic data are tested. A geometric method of channel extraction that finds channels by detecting threshold values of planform curvature is shown to perform well at resolutions up to 30 meters in all three landscapes. The landscape parameters of hillslope length and relief are both successfully extracted at the same range of resolutions. These parameters can be used to detect landscape transience and our results suggest that such work need not be confined to high resolution topographic data. A synthesis of the results presented in this work indicate that although high resolution (e.g., 1 m) topographic data does yield exciting possibilities for geomorphic research, many key

parameters can be understood in lower resolution data, given careful consideration of how analyses
25 are performed.

1 Introduction

Geomorphologists have always made use of topographic data, from initial qualitative observations of surface morphology and its link to process (e.g., Gilbert, 1909) to directly measuring landscape geometries from contour maps, constraining river dynamics and morphometric relationships (e.g.,
30 Horton, 1932; Schumm, 1956; Chorley, 1957). Further quantitative analyses of the Earth's surface were facilitated through the advent of gridded topographic data. Work to generate Digital Elevation Models (DEMs) from photogrammetry, contour maps and active remote sensing platforms (Yamaguchi et al., 1998; Wolock and McCabe, 2000; Rabus et al., 2003; Walker and Willgoose, 2006) produced datasets at tens to thousands of meters grid resolution, along with geomorphic analyses
35 designed for such datasets (O'Callaghan and Mark, 1984; Tarboton et al., 1991; Montgomery and Dietrich, 1994; Burbank et al., 1996; Tarboton, 1997). Algorithms have subsequently been developed which exploit the higher resolution topographic data now available, predominantly from Light Detection And Ranging (LiDAR), which not only refined existing techniques (Passalacqua et al., 2010; Pelletier, 2013; Clubb et al., 2014) but also allowed the study of hitherto unresolvable features
40 on landscapes (Tarolli and Dalla Fontana, 2009; Vianello et al., 2009; Roering et al., 2010; DiBiase et al., 2012; Tarolli, 2014; Milodowski et al., 2015b).

Presently, LiDAR data coverage is predominantly focused around locations of particular scientific interest or infrastructural importance, as can be seen on many LiDAR data portals (e.g., Krishnan et al., 2011). It is unlikely that global LiDAR coverage can be achieved in the near future, leaving
45 the provision of commercially available 12 meter TanDEM-X data (Krieger et al., 2007) and freely available 30 meter Shuttle Radar Topography Mission (SRTM) data (Rabus et al., 2003) as the best available data options for many study sites.

As a consequence of this data availability it is crucial to understand the limitations of lower resolution data when performing topographic analysis for geomorphic research. Extracting channels
50 from topography is a common requirement of many analyses and it is expected that the accuracy of extracted channel networks will be affected by increasing grid resolution (Orlandini et al., 2011). Roering et al. (2007), Hurst et al. (2013b) and Grieve et al. (2016b) used measurements of hillslope length and relief to identify signals of landscape transience. However, all such work was performed on high resolution topography and the impact of grid resolution on these metrics is unknown. Roering et al. (2007) and Hurst et al. (2012) demonstrated that the curvature of ridgelines measured from
55 high resolution topography can be used as a proxy for erosion rates in soil mantled landscapes. This observation has been used in many studies where cosmogenic radionuclide derived erosion rates are unavailable (Pelletier et al., 2011; Hurst et al., 2013c, b; Grieve et al., 2016b). However, it can also

be used in locations with an independent constraint on erosion rates in order to quantify a sediment transport coefficient that relates hillslope sediment flux to topographic gradient, which is set by the material properties of soils (Furbish et al., 2009). Therefore, understanding the effect of grid resolution on the extraction of curvature is crucial in order to evaluate the applicability of calculating the sediment transport coefficient from coarse resolution data.

Here, we grid topographic data at a range of resolutions in order to test the sensitivity of these techniques to ~~increasing grid size~~decreasing grid resolution, with the aim of placing constraints on the estimation of common geomorphic parameters when LiDAR topographic data are unavailable. Through an analysis of one dimensional curvature and topographic gradient approximations, the changes in fidelity as grid resolution decreases for both curvature and topographic gradient are examined and placed within the context of the two dimensional results of this study and the wider literature.

1.1 Previous work

It has long been recognized that the scale of topographic data used in an analysis or model will have an impact on the scale of the processes which can be measured (Vaze et al., 2010). It is intuitive that in order to measure the properties of hillslope processes the resolution of the data must be high enough that variations in hillslope form can be captured adequately. The resolution of topographic data defines the Nyquist frequency, given as $(2Res)^{-1}$ where Res is the grid resolution of the dataset (Warren et al., 2004). The inverse of this frequency yields the minimum wavelength resolvable from a given dataset. In the example of a 1 meter grid ~~size~~resolution, the smallest features that could be resolved would have a length scale of 2 meters. Recognizing this, many authors have attempted to quantify this uncertainty, aiming to answer the question: at what point does a dataset become unsuitable for a given analysis? (e.g., Quinn et al., 1991).

Many attempts to constrain the error content of topographic measurements have focused on comparisons between elevation values taken from differing resolution data products, often in conjunction with field survey data, with the aim of discriminating between DEM generation methods. Walker and Willgoose (2006) performed a comparison of DEMs generated using cartometric and photogrammetric methods against field surveyed elevation data. They demonstrated that at grid resolutions of 6.25, 12.5 and 25 meters the cartometric DEM produced less error than the photogrammetric DEM when compared to the field surveyed data, collected at 3.25 meter intervals.

The advent of LiDAR-derived topographic data provided a new technique, and increased the range of possible grid resolutions, to evaluate. Hodgson et al. (2003) assessed the quality of high resolution topographic data sourced from interferometry and LiDAR for a heavily vegetated catchment in North Carolina. This analysis demonstrated that, under such conditions, the LiDAR-derived DEM outperformed the interferometric data in addition to both classes of USGS DEM product. However, concerns were raised about the overall accuracy of the LiDAR data with a requirement for improved

methodologies to be developed to process multi-storey vegetation. Further work was carried out in North Carolina to constrain the minimum number of LiDAR returns required to generate a DEM at a given grid ~~size~~ resolution (Anderson et al., 2006). This work indicated that a 5 meter grid (the finest resolution used) required approximately 115 points per hectare, whereas at 30 meter grid resolution the requirement reduced to approximately 35 points per hectare.

Vaze et al. (2010) resampled a 1 meter LiDAR-derived DEM to a range of grid ~~sizes~~ resolutions up to 25 meters, and assessed the accuracy of elevation values for each of these resampled grids when compared to a 1 meter resolution field survey. It was found that there was little variation in the distribution of elevation values between the resampled data sets. However, when the data was compared with 25 meter DEMs generated from topographic maps and contour generalization, there were considerable errors, supporting earlier ~~author's~~ authors' conclusions that LiDAR-derived topographic data ~~contains~~ contain more useful geomorphic information than other methods of topographic data collection.

Topographic gradient (or slope) is one of the most fundamental topographic derivatives across the disparate disciplines which utilize topographic data. This measurement has been used in geomorphology (e.g., Burbank et al., 1996), ecology (e.g., Milodowski et al., 2015a), soil science (e.g., Nearing, 1997) and hydrology (e.g., Zhang and Montgomery, 1994). Wolock and McCabe (2000) endeavored to constrain the accuracy with which this parameter can be calculated as grid resolution is increased from 100 to 1000 meters and showed that as the grid ~~size is increased~~ resolution is decreased, there is a clear reduction in the slope values produced for a landscape. Similar wide scale analysis has also been performed within the context of global hydrological analysis (e.g., Hutchinson and Dowling, 1991; Jenson, 1991), indicating that from meter to kilometer scale the reduction in quality of slope measurements is an issue which must be considered when working with topographic data.

Gao (1997) considered the accuracy of slope measurements at locations manually classified as valleys, peaks and ridges. They found an initially small increase in the error of slope measurements at intermediate resolutions (10 to 20 meters) and a much more rapid increase in error between 20 to 30 meters resolution, suggesting a threshold minimum resolution for analysis of these landforms. More recent work has considered how high resolution LiDAR data impacts the quality of slope measurements. Vaze et al. (2010) demonstrated a similar trend to previous authors working ~~in~~ with lower resolution data: as grid resolution is decreased from 1 to 25 meters, there is a considerable reduction in the slope values generated for a landscape. Warren et al. (2004) evaluated the reliability of slope measurements by contrasting 10 methods of gradient calculation against field measurements of topographic gradient. The error between DEM and field-derived slope measurements was shown to increase with decreasing grid resolution (from 1 to 12 meters), resulting in the recommendation to increase data resolution wherever possible to decrease errors in topographic analysis.

Numerous authors have considered the impact of grid resolution on hydrological applications, which often require slope calculation as a fundamental processing step. It has been demonstrated across many landscapes and scales that as grid resolution is decreased the upslope contributing area will increase and the local slope will decrease, which will have a significant impact on any hydrological analysis (Wolock and Price, 1994; Zhang and Montgomery, 1994; Wu et al., 2008). Similarly, from the perspective of modeling global scale sediment fluxes to the oceans, Larsen et al. (2014) noted that measurements of slope dropped logarithmically with increasing grid ~~spacing~~resolution, and failing to account for this may lead to a substantial underestimate of the contribution of steep, montane regions.

Kenward et al. (2000) performed analyses on the accuracy of hydrological networks generated through photogrammetry and radar interferometry at 5 and 30 meters grid resolution respectively. Their error analysis was extended to consider the vertical errors generated both through the down-sampling of the topographic data, as well as from the techniques used to capture the topographic information. Predicted catchment runoff was up to 7% larger in the lower resolution datasets, considered to be driven by both the vertical errors and the reduction in spatial resolution increasing variables such as upslope drainage area.

Topographic Wetness Index (TWI), calculated as $\ln(A/S)$ where A is the specific upslope area and S is the slope, is used as a single variable to compare the hydrological setting of differing parts of the landscape, providing insight into factors including groundwater properties and overland flow rates. Sørensen and Seibert (2007) used LiDAR data to test the robustness of TWI calculations at spatial scales ranging from 5 to 50 meters, concluding that the most sensitive part of the TWI calculation ~~were was~~ the specific upslope area measurements. This sensitivity resulted in significant variation in the TWI values across the range of resolutions tested. Predicted slope stability, modeled in part as a function of TWI, was assessed by Tarolli and Tarboton (2006) who demonstrated that, for large scale landsliding, a LiDAR derived DEM downsampled to 10 meter resolution was more suitable to identify landslide hazard than the highest resolution data available. This highlights the requirement to consider the scale of the process being studied when selecting the appropriate grid resolution for a study, and corresponds to the challenges of selecting the correct size of smoothing window to capture processes at a suitable scale (e.g., Roering et al., 2010; Hurst et al., 2012; Grieve et al., 2016b).

The accuracy of channel network extraction from topographic data was tested by Murphy et al. (2008), who tested a 1 meter LiDAR DEM and a 10 meter photogrammetrically generated DEM against a field mapped channel network in a catchment in Alberta, Canada. The 1 meter LiDAR derived channel network was found to be the best representation of the field mapped channel network, exceeding the quality of an additional channel network mapped by hand from aerial photographs. However, as no intermediate datasets were tested it is not possible to understand at what resolution the degradation in channel network extraction quality occurs ~~at~~ for this location.

As models of agricultural soil loss depend heavily on topographic variables such as slope, work has been carried out to understand the influence of grid resolution on calculated rates of soil loss. Schoorl et al. (2000) tested data resolutions from 1 to 81 meters and demonstrated that in all cases, rates of predicted soil loss increased with grid resolution. However, the rates of soil loss were also influenced by the type of flow routing utilized, with the multiple flow direction algorithm (e.g., Freeman, 1991; Quinn et al., 1991) proving most sensitive to resolution decreases. Work by Erskine et al. (2007) considering models of crop yields in Colorado, USA, demonstrated that on relatively flat surfaces, such as agricultural fields, the spatial resolution is less important than the vertical accuracy when predicting crop yields, with significant errors being produced due to centimeter scale vertical displacements. ~~Increasing the grid size~~ Decreasing the grid resolution from 5 to 30 meters had limited effect on the yield calculations.

Although considerable work has been carried out on the sensitivity of various factors to grid resolution, much of it has been focused on a specific application (e.g., Wolock and Price, 1994; Schoorl et al., 2000; Erskine et al., 2007; Sørensen and Seibert, 2007) with few studies considering the impact of DEM grid resolution within a geomorphic context. Here we aim to extend existing methodologies to constrain the utility of low resolution data products across a suite of geomorphic analyses to understand: (1) How hillslope length, topographic curvature and relief vary with grid resolution, (2) How best to extract channel networks in lower resolution datasets in order to minimize errors, and (3) If it is possible to estimate sediment transport coefficients from low resolution topographic data, where an independent constraint on erosion rate is available.

2 Theory and Methods

2.1 Generating topographic data

Previous studies that have explored the impact of changing grid resolution on topographic or geomorphic parameters have typically produced coarser resolution topographic data by downsampling the highest resolution data product available for their study sites (e.g., Thompson et al., 2001; Anderson et al., 2006; Claessens et al., 2005; Sørensen and Seibert, 2007). Work has been undertaken to understand the influence of various re-gridding schemes on topographic measurements (Wu et al., 2008), with focus placed upon understanding the use of downsampling high resolution data in order to facilitate computationally expensive analysis on larger spatial areas with minimal loss in data fidelity. However, as computational power increases, cost decreases and more efficient algorithms are developed (Tesfa et al., 2011; Qin and Zhan, 2012; Braun and Willett, 2013; Schwanghart and Scherler, 2014) the need to downsample data for computational convenience becomes reduced. Instead, it becomes more important to understand the limitations of available data products, to facilitate geomorphic analysis in locations where high resolution topographic data are not available. This is of particular importance in many studies of natural hazards (e.g., Saha et al., 2002; Carranza and Cas-

tro, 2006) where data quality is limited. It will also open geomorphic research up to communities which do not have the resources to acquire high resolution topographic data.

As a consequence of these constraints we have generated topographic data for our three study sites without downsampling or re-gridding high resolution data products, as is commonly performed (Thompson et al., 2001; Anderson et al., 2006; Claessens et al., 2005; Sørensen and Seibert, 2007). Instead we have followed established techniques to grid the processed LiDAR point cloud data provided by OpenTopography (<http://www.OpenTopography.org>) at a range of data resolutions which span from 1 meter, considered to be the limit of the Oregon Coast Range dataset by Grieve et al. (2016a) to 30 meters, which is equal to the grid resolution of the global SRTM dataset (Rabus et al., 2003), the Advanced Spaceborne Thermal Emission and Reflection Radiometer (ASTER) dataset (Yamaguchi et al., 1998) and in excess of the TanDEM-X dataset (Krieger et al., 2007) and as such should span the vast majority of grid resolutions used in modern geomorphic research. The [direct comparison between elevation products generated using differing methodologies is challenging \(e.g., DeWitt et al., 2015\)](#), and more work is required within the context of geomorphic research to understand limitations in topographic datasets, such as SRTM and TanDEM-X, which arise from data capture and processing rather than purely from resolution constraints. By generating the topographic data from the same source, we aim to isolate the signal of decreasing data resolution, without the introduction of new sources of error which may arise from data collected using a different instrument. The error estimates of the raw point clouds used in this re-gridding process are provided by OpenTopography and can be found in Table [4\(1\)](#).

The point clouds are gridded using Points2Grid, which employs a local binning algorithm, searching for points within a circular window of radius defined by Kim et al. (2006) as,

$$Radius = \lceil \sqrt{2}Res \rceil. \quad (1)$$

An inverse distance weighted averaging approach is then performed to assign an elevation value to each grid cell. This approach, which has been employed in previous studies ([Grieve et al., 2016a, b](#)) ([Grieve et al., 2016a, b](#)), yields a reliable representation of the topographic surface, with few data gaps and a minimal amount of interpolation. [The level of interpolation performed is controlled by the density of LiDAR ground returns within each search window, consequently more interpolation may be performed in areas of high vegetation density such as the Oregon Coast Range. This is an additional source of error which must be considered when processing LiDAR data and this consideration informed the selection of 1 meter as the maximum resolution used in this study as it is the highest resolution these datasets can have been gridded to in the past \(e.g., Perroy et al., 2010; Grieve et al., 2016a, b\)](#).

The topographic data used in this study ~~has~~[have](#) been gridded at 20 resolutions, and Figure [4\(1\)](#) provides representative hillshades of a section of Santa Cruz Island, highlighting the degradation of topographic information as grid resolution is ~~increased~~[decreased](#).

2.2 Measuring curvature from topography

Landscape curvature has long been recognized as a key geomorphic characteristic of landscapes, from ~~Gilbert (1909)~~'s Gilbert's (1909) qualitative observations of hilltop convexity to more recent approaches to quantify landform curvature using digital topography (e.g., Schmidt et al., 2003; Hurst et al., 2012). However, unlike other key landscape properties such as gradient (Gao, 1997; Wolock and McCabe, 2000; Warren et al., 2004; Vaze et al., 2010), hydrology (Wolock and Price, 1994; Zhang and Montgomery, 1994; Murphy et al., 2008; Wu et al., 2008) or soil characteristics (Schoorl et al., 2000; Erskine et al., 2007), the influence of grid resolution on curvature has not been fully explored, particularly within a geomorphic context.

This is particularly important with the proliferation of high resolution topographic data from LiDAR, allowing the analysis of curvature at increasingly fine scales. Recent developments in channel extraction techniques (Lashermes et al., 2007; Passalacqua et al., 2010; Pelletier, 2013; Clubb et al., 2014) typically require the identification of topographic convergence in high resolution topography using a curvature threshold. Roering (2008) and Hurst et al. (2012) demonstrated that hilltop curvature scales with erosion rate and as such demonstrated the importance of accurately constraining the impact of grid resolution on this landscape parameter. Its importance is highlighted by an increasing number of studies using this relationship as a proxy for erosion rate (Pelletier et al., 2011; Hurst et al., 2013c, b; Grieve et al., 2016b). Hilltop curvature can also be used to constrain the sediment transport coefficient of a landscape where an independent constraint on erosion rate is available (Hurst et al., 2013c).

The measured curvature of a topographic surface depends on the orientation of the measurement. Here, we consider two common types of curvature, with the following definitions: (1) Total curvature (C_{Total}), the curvature of a surface calculated in 2 dimensions (Evans, 1980; Zevenbergen and Thorne, 1987; Moore et al., 1991); and (2) Tangential curvature (C_{Tan}), the curvature calculated normal to the slope gradient (Mitášová and Hofierka, 1993). These two measures are employed to extract hilltop curvature and channel networks, respectively. However, these definitions vary between studies and software packages: see Schmidt et al. (2003) for a full review of the varying nomenclature and definitions of curvature measurements used in the literature.

Work by Schmidt et al. (2003) utilized 10 meter resolution DEMs to evaluate the most accurate method for calculating curvature from digital topographic data. It was concluded that curvature could be most accurately calculated when a 9 term polynomial was fitted to the elevation surface, with the caveat that this will only be effective where the data quality is high enough. In cases where the data are of lower accuracy, Schmidt et al. (2003) recommended using quadratics to fit the elevation data. This work was extended by Hurst et al. (2012) to consider if these patterns held for high resolution topographic data, and it was found that fitting a 6 term quadratic or 9 term polynomial yielded similar results. Therefore, Hurst et al. (2012) chose to use the 6 term quadratic to compute curvature. For this study we also chose to use the 6 term quadratic in order to reduce computation time, and more

importantly, to provide more robust curvature values as the data quality is degraded to resolutions
 275 below 10 meters (Schmidt et al., 2003).

We calculate curvature using a circular window passed across the landscape, with a radius defined
 by identifying scaling breaks in the standard deviation and inter-quartile range of curvature calcu-
 lated at increasing window sizes, consistent with the length scales of individual hillslopes (Lash-
 280 ermes et al., 2007; Roering et al., 2010; Hurst et al., 2012; Grieve et al., 2016a, b). Consequently,
 curvature measurements at the hillslope scale can only be considered at data resolutions high enough
 to resolve individual hillslope features, considered here to be no more than 10 meters, based on the
 window sizes identified for each landscape. A quadratic function of the form,

$$\zeta = ax^2 + by^2 + cxy + dx + ey + f, \quad (2)$$

is then fitted to the elevation values within the window by least squares regression (Evans, 1980),
 285 where ζ is the elevation, x and y are horizontal coordinates and a through f are fitting coefficients.
 The fitted coefficients of this polynomial can be used to calculate differing types of curvature:

$$C_{Total} = 2a + 2b, \quad (3)$$

and

$$C_{Tan} = \frac{2ae^2 - 2cde + 2bd^2}{(d^2 + e^2)\sqrt{(1 + d^2 + e^2)}}. \quad (4)$$

290 From the measure of C_{Total} for every cell in a DEM, we can also extract a subset of curvature
 values from the hilltops. The value of curvature at a hilltop (C_{HT}) can be readily evaluated if the
 positions of the hilltops are known. To extract hilltops we follow Hurst et al. (2012) in defining
 a hilltop as the boundary between two drainage basins of the same stream order. These points in
 the landscape can be algorithmically extracted once a channel network is defined through the iden-
 295 tification of points in the landscape where two channels of the same Strahler order meet, and the
 identification of that point's upslope contributing area. Each of these areas defines a basin of a given
 order and by repeating this process across the range of Strahler orders found in the landscape, a
 network of hilltops can be defined. This network is then used to sample the curvature values at these
 locations to provide the C_{HT} values across the landscape. To ensure consistency between C_{HT}
 300 measurements at changing grid resolutions, the same channel network, generated using the geomet-
 ric method described in Section 2.3 from 1 meter resolution data, is used as the basis of the hilltop
 extraction algorithm.

For our data on hilltop curvature, C_{HT} , hilltops with a gradient exceeding 0.4 are excluded as
 Hurst et al. (2012) demonstrated that this gradient is the point at which $> 15\%$ of sediment transport

is nonlinear. Under nonlinear sediment flux hilltop curvature scales nonlinearly with erosion rate (Roering, 2008), and consequently cannot be used as a proxy for erosion rates. As hilltops have a convex form, their curvature should be negative, so as a final step any points identified as hilltops which have a positive curvature are excluded from further analysis.

2.3 Channel extraction

Extracting channel networks from digital topographic data remains a fundamental challenge for many areas of topographic analysis. Without the ability to discriminate between fluvial and hillslope domains, it is not possible to extract many topographic metrics such as hillslope length (Grieve et al., 2016a), mean basin slope (DiBiase et al., 2010) or hilltop curvature (Hurst et al., 2012), and the accuracy of each of these metrics will be influenced by the accuracy of the channel network extracted.

At a more fundamental level, the ability to identify where channels initiate will facilitate better understanding of the processes acting at the transition between diffusive (hillslope) and advective (fluvial) sediment transport (Perron et al., 2008a).

Many authors have made use of field mapped channel heads both as a basis for geomorphic analysis and as a method for evaluating channel extraction methods (Montgomery and Dietrich, 1989; Orlandini et al., 2011; Julian et al., 2012; Jefferson and McGee, 2013; Clubb et al., 2014). Prior to the availability of high resolution topographic data, contributing area and slope-area scaling thresholds were commonly used to define the location of channel heads directly from DEMs (Mark, 1984; O’Callaghan and Mark, 1984; Montgomery and Dietrich, 1989; Tarboton et al., 1991; Dietrich et al., 1992, 1993). The influence of ~~increasing grid size~~ decreasing grid resolution on such channel extraction methods was evaluated by Orlandini et al. (2011), who demonstrated a strong sensitivity in predicted channel head location to grid resolution, suggesting that coarser resolution data may not be suitable for channel extraction through an area threshold. We apply the method described by Orlandini et al. (2011) to quantify the accuracy of an extracted channel network, detailed in Section 2.4.

Several methods have been proposed to identify channel heads from high resolution topography. Typically these methods exploit the high resolution nature of topographic data to resolve morphometric or process based signatures of channel initiation, or the transition between the hillslope and fluvial domain (Lashermes et al., 2007; Passalacqua et al., 2010; Pelletier, 2013; Clubb et al., 2014). Here we evaluate how two techniques, one geometric method built upon work by Pelletier (2013) and Passalacqua et al. (2010), and one process based method, the DrEICH algorithm, developed by Clubb et al. (2014), are influenced by ~~increasing grid cell size~~ decreasing grid resolution.

The DrEICH method was selected for evaluation as the technique on which it is based has been shown to operate successfully in lower resolution data (Mudd et al., 2014). The DrEICH method makes use of χ analysis, performed by integrating drainage area along a river profile to facilitate comparisons between river profiles of differing drainage area, with fewer uncertainties than tradi-

tional slope-area analysis (Royden et al., 2000; Perron and Royden, 2013). When plotting the χ value against elevation for a river profile, river channels will plot as linear segments, whereas hillslopes will display nonlinear segments. The DrEICH algorithm identifies the transition between these linear and nonlinear segments as the best fit location of the channel head.

345 The geometric method, used by Grieve et al. (2016b), removes noise from the raw topographic data using a Wiener filter (Wiener, 1949), as recommended by Pelletier (2013). This smoothed topography is then processed to identify channelized portions of the landscape using a tangential curvature threshold (e.g., Pelletier, 2013), selected using the deviation of the probability density function of curvature from a normal distribution on a quantile-quantile plot (e.g., Lashermes et al., 2007; Pas-
350 salacqua et al., 2010). The identified areas of channelization are then combined into a contiguous channel network by employing a connected components algorithm (He et al., 2008) and thinned into a final channel network skeleton using the algorithm of Zhang and Suen (1984).

Channels were extracted from the 5, 10, 20 and 30 meter DEMs generated in Section 2.1 using both of the channel extraction methodologies. Parameters required in the operation of each algorithm
355 were selected based on values used in previous studies (Grieve et al., 2016a, b) and these values can be found in Appendix A.

2.4 Comparing channel networks

To assess the accuracy of the channel networks extracted using both methods, we employ two measures of quality described by Orlandini et al. (2011). These measures operate on classifications of
360 the predicted location of channel heads placing each channel head into one of three categories: true positives (TP); false positives (FP) and false negatives (FN). A TP is where a predicted channel head from low resolution data occupies the same spatial location as the channel head derived from 1 meter resolution topography. A FP is where a predicted channel head is placed in a location where there is no channel head in the high resolution data. A FN is when a channel head from high resolu-
365 tion topography does not have a predicted channel head from low resolution topography in the same spatial location.

We follow Orlandini et al. (2011) in employing a 30 meter search radius around the 1 meter-derived channel heads, and consider a low resolution channel head falling within this radius to be spatially coincident. This has the effect of normalizing the size of each channel head point, to ensure
370 that we can perform comparisons between predictions made at different spatial resolutions.

The reliability, r , of a channel extraction method is the ability of a method to not predict channel heads in areas where none are located and is calculated as,

$$r = \frac{\sum TP}{\sum TP + \sum FP}, \quad (5)$$

where $\sum TP$ is the total number of true positives and $\sum FP$ is the total number of false positives.

375 The sensitivity, s , of a channel extraction methodology is given by,

$$s = \frac{\sum TP}{\sum TP + \sum FN}, \quad (6)$$

where $\sum FN$ is the total number of false negatives. The sensitivity is the ability of a method to predict all of the channel heads expected. Using these two indexes it is possible to quantify the quality of channel heads predicted using low resolution data, as well as understand why a particular
380 method fails, by distinguishing between methods which fail due to either over or under predicting the number of channel heads in a landscape, or by simply placing channel heads in the wrong spatial location.

2.5 Estimating the hillslope sediment transport coefficient from hilltop curvature

The sediment transport coefficient, $D [L^2T^{-1}]$ (dimensions of [M]ass, [L]ength and [T]ime denoted
385 in square brackets), of a landscape is a measure of its sediment transport efficiency and was demonstrated by Furbish et al. (2009) to be controlled by the material properties of soil such as grainsize, cohesion and thickness. The value of D within a landscape will exert a control on the morphology of hillslopes (e.g., Roering et al., 1999). Diffusion-like hillslope evolution can be modeled using a 1D mass conservation equation, assuming that the contribution to surface lowering from chemical
390 processes is negligible when contrasted with the signal of surface lowering from physical processes (e.g., Roering et al., 1999; Mudd and Furbish, 2004),

$$\rho_s \frac{\partial \zeta}{\partial t} = -\rho_s \frac{\partial q_s}{\partial x} + \rho_r U, \quad (7)$$

where $\zeta [L]$ is the elevation of the land surface, ρ_s and $\rho_r [ML^{-3}]$ are densities of dry soil and rock, respectively and $U [LT^{-1}]$ is the uplift rate. In steady state landscapes, where $U = E$ and

395 ~~$\partial z / \partial t = 0$, Equation 7~~ $\partial \zeta / \partial t = 0$, Equation (7) simplifies to,

$$\frac{\rho_r}{\rho_s} E = \frac{\partial q_s}{\partial x}, \quad (8)$$

with $E [LT^{-1}]$ denoting the erosion rate. To solve this equation, a statement of the volumetric sediment flux per unit contour length, $q_s [L^2T^{-1}]$, must be derived. A nonlinear relationship between sediment flux and topographic gradient has been proposed by a number of authors (Andrews and
400 Bucknam, 1987; Koons, 1989; Anderson, 1994; Howard, 1997; Roering et al., 1999, 2001; Pelletier and Cline, 2007). Support for such models has been found from both tests of the resulting topographic predictions (Roering et al., 2007; Hurst et al., 2012; Grieve et al., 2016a), as well as through independent measurements of sediment flux across hillslopes (Roering et al., 2001; Roering, 2008).

The nonlinear model proposed by Andrews and Bucknam (1987) and Roering et al. (1999) is of
 405 the form,

$$q_s = DS \left[1 - \left(\frac{|S|}{S_c} \right)^2 \right]^{-1}, \quad (9)$$

where S_c is a critical gradient, and as the hillslope gradient approaches this threshold, q_s asymptotes towards infinity.

At low hillslope gradients (e.g. on hilltops), the term within brackets in Equation 9(9) approxi-
 410 mates to unity (Hurst et al., 2012). Equation 9(9) can therefore be substituted into Equation 8(8)
 and can be solved for D on low gradient hilltops, assuming that an independent constraint on E is
 available,

$$D = -\frac{E\rho_r}{C_{HT}\rho_s}. \quad (10)$$

2.6 Hillslope length and relief

415 Hillslope length (L_H) is a crucial landscape parameter to constrain as it controls the rate of mass
 flux by overland flow within catchments (Dunne et al., 1991; Thompson et al., 2010; Dunne et al.,
 2016), influences rates of soil erosion (Liu et al., 2000), and presents a first order control on the
 maximum source area of landslides (Hurst et al., 2013a). Furthermore, it may be used to demonstrate
 nonlinearity in hillslope sediment flux (Roering et al., 1999, 2007; Grieve et al., 2016a, b).

420 Many studies have attempted to calculate hillslope length through the inversion of drainage density
 (Tucker et al., 2001), analysis of plots of local slope against drainage area (Roering et al., 2007),
 direct measurements from topographic maps (Hovius, 1996; Talling et al., 1997), and by measuring
 the length of overland flow from ridgeline to channel (Hurst et al., 2012; Grieve et al., 2016a). Grieve
 et al. (2016a) demonstrated that the most geomorphologically suitable technique to use, particularly
 425 in the context of hillslope sediment transport, was that of measuring the length of overland flow.
 An additional measure which can be derived from this technique is the topographic relief, which
 is the difference in elevation between a hilltop and channel connected by a hillslope flow path.
 Topographic relief has been estimated in a number of ways and is frequently used in studies of
 tectonic geomorphology (e.g., Gabet et al., 2004; Hilley and Arrowsmith, 2008; Gallen et al., 2011,
 430 2013). Furthermore, topographic relief may be used to generate dimensionless erosion and relief
 plots (Roering et al., 2007; Hurst et al., 2012; Sweeney et al., 2015; Grieve et al., 2016b), which can
 be used to identify landscape transience (Hurst et al., 2013b; Mudd, 2016). Consequently, we intend
 to test the robustness of measuring hillslope length and relief as grid resolution decreases, with the
 aim of facilitating increased confidence in geomorphic analyses performed in locations where high
 435 resolution topography is unavailable.

Using the 20 topographic datasets generated in Section 2.1 for each of the three landscapes, hillslope length measurements were generated following the methods outlined in Grieve et al. (2016a). We measured hillslope length on each dataset using two different channel networks. Firstly, channel heads were extracted from the highest resolution data set, in each case 1 meter, using the geometric method outlined in Section 2.3. These high resolution channel heads were mapped onto the coarser resolution topographic data, to ensure that changing channel extraction results will not have an influence on the measures of hillslope length. This allows improved isolation of the factors driving variations in hillslope length as grid resolution is decreased. Secondly, the analysis was performed using coarser resolution channel networks extracted using the geometric method of channel extraction. We use the geometric method as opposed to the DrEICH method because, as we will show below, the geometric method is less sensitive to grid resolution. These two channel networks effectively provide upper and lower bounds on the accuracy of hillslope length and relief measurements.

3 Study sites

Three study sites from the United States have been selected for this study: Santa Cruz Island, California; Gabilan Mesa, California; and Oregon Coast Range, Oregon. The first two sites have regularly spaced valleys at a range of length scales, particularly Gabilan Mesa, which has been the focus of previous work in this context (Perron et al., 2008b, 2009). Santa Cruz Island, while less studied in the context of topographic analysis than the Gabilan Mesa, has a wider range of hilltop curvatures (Figure 2). The Oregon Coast Range has been considered to be very regular, with uniform first order drainage areas (Roering et al., 1999, 2007). However, more recent work has demonstrated the spatial variability of many topographic measurements in this landscape (Marshall and Roering, 2014; Grieve et al., 2016b) and as such provides a more challenging test case for our analyses. Furthermore, these sites were selected as they each have high resolution LiDAR data covering a large spatial area, and have been the subject of many previous studies (Reneau and Dietrich, 1991; Roering et al., 1999, 2001; Montgomery, 2001; Pinter and Vestal, 2005; Roering et al., 2007; Perron et al., 2009; Perroy et al., 2010, 2012; Marshall and Roering, 2014; Grieve et al., 2016a, b) which should provide a good basis for the evaluation of the results of this study in a wider geomorphic context.

3.1 Gabilan Mesa

Gabilan Mesa, a section of the Central Coast Ranges in California, USA (Figure 2b) is a highly regular landscape with very gentle transitions between hillslopes and channels, which correspond to topographic predictions of diffusion-like sediment transport (Roering et al., 2007). The area's semi-arid climate supports range of vegetation from oak savanna to chaparral shrubland (Shreve, 1927; Roering et al., 2007). The nature of this lower density vegetation allows a larger proportion

of LiDAR pulses to reach the ground, requiring less processing and interpolation to generate a final
bare earth DEM for analysis (Liu, 2008; Meng et al., 2010).

A series of large, linear canyons running north east to south west are fed by parallel tributaries
which flow perpendicular to the main trunk channel. These regularly spaced valleys present two
distinct length scales in the landscape which have been observed both qualitatively (Dohrenwend,
1978, 1979) and quantitatively through measurements of hillslope length distributions (Grieve et al.,
2016a). Relationships between dimensionless erosion rate and relief, the uniformity of hilltop cur-
vatures, and the regularity of valley spacing have all been used to assert that much of this landscape
is in steady state (Roering et al., 2007; Perron et al., 2009; Grieve et al., 2016b), although localized
observations of a relict plateau surface add complexity to this steady state observation.

3.2 Santa Cruz Island

Santa Cruz Island (Figure 2c), the largest of the eight California Channel Islands located to the
west of California, USA, is divided by a large east-west trending valley, which follows the Santa
Cruz fault (Pinter et al., 2003; Muhs et al., 2014). Parallel to this valley are two large ridges, one
to the north and one to the south, which exhibit regularly spaced parallel channels draining north to
south (Pinter et al., 1998; Pinter and Vestal, 2005); this regular pattern is particularly evident in the
northwest section of the study area. The Santa Cruz Fault has been demonstrated to have left-lateral
strike slip motion, which deflects channels away from perpendicular to the main valley in the center
of the island (Pinter et al., 1998). Studies of marine terraces in the region suggest that the Channel
Islands have been steadily uplifted through the late Quaternary (Muhs et al., 2014).

The island has a Mediterranean climate similar to that of Gabilan Mesa (Pinter and Vestal, 2005),
supporting extensive grassland with occasional patches of pine forest and chaparral vegetation (Pin-
ter and Vestal, 2005; Perroy et al., 2010, 2012). Human activities led to overgrazing across the island
at the turn of the 19th century, causing a period of gullying and rapid erosion, particularly evident in
the southwest of the island (Pinter and Vestal, 2005; Perroy et al., 2012). The LiDAR data collected
for this location has been extensively tested and ground truthed, ensuring that it is suitable for use in
a geomorphic context (Perroy et al., 2010) and for performing topographic analysis at high spatial
resolutions.

3.3 Oregon Coast Range

The Oregon Coast Range in Oregon (Figure 2d), USA, is a densely vegetated upland landscape,
dominated by coniferous and hardwood forests (Schmidt et al., 2001), with a humid climate (Roer-
ing et al., 1999). Qualitative observations of the landscape suggest that the valleys are regularly
spaced, with a particular uniformity found in the dimensions of first order drainage basins (Roering
et al., 1999, 2007; Marshall and Roering, 2014). Such observations have been supported by mea-
surements of hillslope length across the landscape (Grieve et al., 2016a). However, comparisons

of the dimensionless relief and erosion rate performed by Grieve et al. (2016b) highlight the small scale topographic variability inherent in this otherwise regular landscape. The Oregon Coast Range is considered to be in steady state due to the correlation between uplift rates from marine terrace data (Kelsey et al., 1996) and erosion rates from cosmogenic radionuclides (Beschta, 1978; Reneau and Dietrich, 1991; Bierman et al., 2001; Heimsath et al., 2001). The hillslopes are steeper and the ridgelines sharper than in Gabilan Mesa, consistent with observations of debris flows and shallow landsliding across the range (Dietrich and Dunne, 1978; Heimsath et al., 2001; Montgomery, 2001), which have the potential to create a distinct topographic signature (Booth et al., 2009).

4 Results

4.1 Curvature

Figure 3 illustrates the variations in total curvature with grid resolution for a section of Santa Cruz Island. As the ~~cell size is increased~~ grid resolution is decreased, the range of C_{Total} measurements are reduced, with much of the landscape becoming apparently planar. Within the black box, which covers the same spatial area as the boxes in Figure 4(1), the impact of degrading resolution on small topographic features is observed, with the curvature signal of this first order feature being lost as the grid ~~size~~ resolution approaches 30 meters.

Figure 4 displays the variations in the distribution of total and tangential curvature measurements with grid resolution for each of the study landscapes. Santa Cruz Island shows little variation in mean and median curvature with resolution, with the majority of the changes in each distribution with resolution occurring at the extremes of the curvature distribution for each dataset, as the representation of ridgelines and channel bottoms becomes increasingly diffuse. As resolution is decreased, the range between 2nd and 98th percentiles and the 1st and 3rd quartiles decreases, with a more rapid reduction in the more extreme values than in the quartiles (Figure 5). While this effect is most marked at the extremes, the distributions are condensed across all percentile intervals as grid resolution is increased beyond 3-4 meters. This behavior is observed for both C_{Total} and C_{Tan} as grid ~~size is increased~~ resolution is decreased.

In the Oregon Coast Range for both measurements of curvature there is little variation between the 1, 2 and 3 meter datasets, with a broad range of measurements shown in the probability distributions. Beyond this point the mean and median do not significantly change, but as in Santa Cruz Island, the overall distribution of measurements compresses towards the average value for the landscape. The Gabilan Mesa data show similar trends to that of Santa Cruz Island, but exhibit less variability at lower resolutions. The probability distributions of each measurement also exhibit less change with resolution than the other two datasets, indicating a reduced sensitivity to grid resolution at this location.

4.2 Channel networks

Figure 6 provides a qualitative overview of the changes of channel network extent with decreasing grid resolution for both methods, across the three test landscapes. In each case the general patterns are that as the grid resolution is decreased, the lowest order channels are lost, as they exist at a spatial scale below that of the data resolution. In contrast, much of the predicted networks appear to occupy similar spatial locations in larger, higher order channels where the topographic signal of a channel is more pronounced. The geometric method shows less reduction in drainage density than the DrEICH method, as data resolution is decreased.

Figure 7 provides a quantitative assessment of channel extraction quality by presenting the indexes of reliability and sensitivity for both the geometric channel extraction and extraction based on DrEICH, as the grid ~~size is increased~~resolution is decreased. In Gabilan Mesa the channels extracted by the geometric method exhibit a high reliability which does not decrease considerably with ~~increasing~~grid sizedecreasing grid resolution, suggesting that for each resolution step a large proportion of the predicted channel heads are spatially coincident with the channel heads generated from the 1 meter data. The sensitivity values for this method and location are lower, and decline more steadily with decreasing grid resolution, suggesting an increasing number of channel heads being missed by the algorithm as grid ~~size is increased~~resolution is decreased. The DrEICH method does not perform as well in Gabilan Mesa, with lower index values for the 5 meter data than the geometric method, and a rapid decline towards index values of 0, suggesting that the predicted channel heads bear little relation to the channel heads from the 1 meter data.

In Santa Cruz Island the geometric method's reliability index is similar to Gabilan Mesa, however the sensitivity index is not as high, which indicates a large number of channel heads are being missed but where a prediction is made it is typically accurate. The DrEICH method exhibits a similarly large reliability initially, but again shows more rapid degradation in the index value as grid ~~size is increased~~resolution is decreased. The sensitivity values again decline more rapidly and reach a 0 value at 20 meter grid resolution.

The data for the Oregon Coast Range shows similar patterns for both methods, although the geometric method exhibits systematically larger index values. In each case the reliability increases slightly from 5 to 10 meter resolution and then declines gradually towards 30 meter ~~grid size~~resolution. The sensitivity indexes for both methods begin at a larger value than the reliability indexes, and steadily decline towards 0. A sensitivity value exceeding the reliability value suggests that in this landscape there are fewer missed channel heads in the 5 meter data, but at the expense of too many predicted channel heads in locations where there are none predicted in the 1 meter data.

4.3 Sediment transport coefficient

Using the values for hilltop curvature generated in Section 4.1, published parameters for erosion rate and material properties outlined in Table 2 and Equation 10(2) and Equation (10), the average sediment transport coefficient (D) of each landscape can be calculated as a function of grid resolution.

575 Figure 8-(8) displays the relationship between diffusivity and grid resolution for each of the three study sites. The data for Santa Cruz Island and Oregon Coast Range both show a gradual increase in diffusivity with ~~grid-size~~decreasing grid resolution, the rate of which reduces with ~~increasing grid size~~decreasing grid resolution. The Gabilan Mesa data does not exhibit the same trend, with little variability in calculated D values as resolution is decreased. Although the Oregon Coast Range and
580 Santa Cruz Island datasets exhibit an increase in estimated D , all of the values for each location fall within the range of values for D compiled by Hurst et al. (2013c).

4.4 Hillslope length and relief

The hillslope length measurements for Santa Cruz Island calculated using 1 meter channel heads (Figure 9a) show little variation in the distribution of the data up to 10 meter resolution, with the
585 main difference being the ~~increase with grid size~~decrease with grid resolution in the 2nd percentile measurements, which is a trend observed within each of the datasets. The mean and median values also gradually decrease towards the 10 meter resolution dataset, before gradually increasing towards the 30 meter resolution step. However, these variations are very small, with the overall distributions of hillslope length and relief not varying considerably between resolution steps. When the same
590 hillslope length algorithm is applied using channel networks extracted using the geometric method for each resolution step (Figure 9c), there is little change in the distribution or average values of L_H until beyond the 10 meter resolution step. Beyond this point the measurements of hillslope length are clearly affected by the reduction in accuracy of the channel network. The relief measurements for both channel head methods (Figure 9b, d) in Santa Cruz Island exhibit little resolution dependence
595 up to 10 meter ~~cell-sizes~~grid resolution, beyond which point the values increase steadily. In the case of the 1 meter channel heads the distribution becomes compressed around the average values at lower resolutions, whereas with the variable channel head dataset the distribution of values increases with decreasing resolution.

In Gabilan Mesa the hillslope length measurements calculated using 1 meter channel heads (Figure 10a) show a gradual reduction in mean and median values between the highest resolution data
600 and the 8 meter resolution data before a small plateau and then a small increase until the 30 meter dataset. The average relief values calculated for the same dataset increase steadily by approximately 20 meters between the highest and lowest resolution datasets (Figure 10b). The distribution of relief measurements are broadly consistent between 1 and 5 meter resolutions before reducing about the
605 median as grid ~~size is increased~~resolution is decreased. The same trends are apparent in the hillslope

length and relief data calculated using the variable channel heads (Figure 10c, d) with little change between the two pairs of datasets.

The hillslope length measurements for the Oregon Coast Range with channel heads from the 1 meter data (Figure 11a) again show a gradual reduction in the median values with a gradual increase in the mean values until 20 meter grid resolution. Beyond this point the data ~~becomes~~become considerably more variable, with a large increase in both the mean and median results. The relief data shown in Figure ~~11b is~~(11b) are the most consistent of the three landscapes with very little variation in the values until they begin increasing with ~~cell size~~grid resolution at approximately 20 meter resolution. The data presented in Figure ~~11c and d shows~~(11c) and (d) show the most sensitivity to grid resolution of the three landscapes. Average hillslope length values reduce towards 10 meters before stabilizing and then rapidly increasing in the same manner as the fixed channel head data. The relief measurements show a gradual decline in mean relief across the range of resolutions from 1 to 10 meters, where the fixed data ~~shows~~show much less variation.

5 Discussion

5.1 Curvature and the problem of resolution-dependent filtering

Across the three landscapes the variance of the distributions of both total and tangential curvature values are systematically reduced as resolution is decreased, an effect that is particularly notable after the grid resolution exceeds 3-4 meters (Figure 4). In each of the three datasets, the inter-quartile ranges remain relatively constant, whereas beyond 4 meters resolution in each case the range between the 2nd and 98th percentiles reduces rapidly (Figure 5), demonstrating that the majority of the loss of curvature information occurs at the extremes of the distribution.

In producing a DEM, we are sampling a complex two-dimensional elevation signal, in which spatial variations in geomorphic process drive variations in topographic amplitude at different wavelengths (Perron et al., 2008b). Decreasing the grid resolution of DEMs acts as a low-pass filter on this topographic signal, which preferentially degrades features in the topography that have significant amplitude at small wavelengths, such as sharp ridgelines, narrow valley bottoms, and local topographic roughness generated by, for example, landslides, tree throw and rock exposure (Figures 1 and 3). While the position of ridges and valleys is preserved in coarser resolution data, the magnitude of their associated curvature values is reduced as ~~cell sizes increase~~resolution decreases; this effect is particularly marked for hillslopes in which curvature is focused at the ridge crest and valley bottoms, a common characteristic of more rapidly eroding landscapes (Roering et al., 1999, 2007). For first order landscape features, such as gullies, landslide scars and first order channels, ~~increasing grid size~~decreasing grid resolution eventually results in the complete loss of topographic information, as highlighted in ~~Figure 1 and Figure 3~~Figures (1 and 3).

640 5.1.1 Topographic filtering and its implications for curvature and slope measurements

To interpret the observed loss of fidelity that accompanies coarser grids evident We can explain some of the observed behavior in Figures (4 and 5, it is illustrative to) through spectral analysis. Spectral analysis assumes that data can be approximated as the sum of sine waves of varying frequency. One can apply a spectral filter to any dataset: this simply means that one transforms input data into output data using linear functions (that is, we can multiply the input data by a series of weights). Any filter will have a *gain*, which is the ratio between the filtered amplitude and the original amplitude. A filter will also have a *fidelity*, which is the ratio between the continuous gain and the discrete gain. We are using discrete data, so the fidelity measures how well our discrete filter is able to reproduce a theoretical signal that is continuous. We can never have continuous data since LiDAR is not continuous: our filters will always represent an imperfect version of nature and fidelity quantifies just how imperfect it is. Hopefully our readers will not be put off by this foray into jargon, and we can move on to practical application of spectral filters for use in topographic applications.

We will examine the spectral behavior of a simplified 1-D one dimensional system. We acknowledge that a 1 D approach cannot fully describe complex two dimensional topography of real landscapes, but a one dimensional system is amenable to mathematical treatment that can at least give us qualitative insight into trends observed in our data. In addition, some of the features of interest, for example ridgelines and channels, can be roughly approximated as one dimensional structures within a two dimensional landscape.

Curvature in one dimension, C_x [L^{-1}], is often approximated with the differencing equation:

$$660 \quad C_x = \frac{\zeta_{(x-\Delta x)} - 2\zeta_x + \zeta_{(x+\Delta x)}}{(\Delta x)^2}, \quad (11)$$

where ζ [L] is the elevation of the land surface, x [L] is a location in space, C_x is the curvature at location x , and Δx [L] is the grid interval. The subscripts denote the discrete locations where elevation is evaluated. We Equation (11) is in fact a spectral filter. The original data is ζ , which is distributed in space, and the weights in the filter are $(\Delta x)^{-2}$, $-2(\Delta x)^{-2}$, and $(\Delta x)^{-2}$ for data points at $(x - \Delta x)$, x , and $(x + \Delta x)$, respectively. From this filter, we can calculate the wavenumber response function. A full description of the theory and significance of a wavenumber response function can be found in Jenkins and Watts (1968). For our purposes, it is sufficient to know that this function must be calculated if we are to calculate the gain and fidelity of the filter (which here is a measure of curvature of our elevation data). The wavenumber response function ($H(\omega; \Delta x)$) from this filter (Jenkins and Watts, 1968), given by Jenkins and Watts (1968) in their Equation (7.3.7), is:

$$H(\omega; \Delta x) = \frac{2}{(\Delta x)^2} \frac{\cos(\omega \Delta x) - 1}{(\Delta x)^2} \frac{2}{(\Delta x)^2} [\cos(\omega \Delta x) - 1], \quad (12)$$

where $\omega = 2\pi/L$ [L^{-1}] is the wavenumber with wavelength L [L](~~that is, higher~~. Higher wavenumbers correspond to ~~higher frequencies and thus shorter wavelengths~~)shorter wavelengths. Using this function, we can calculate the gain, $G(\omega; \Delta x)$, ~~which is~~. Again, the gain measures the ratio of the
675 amplitude of the filtered signal (in this case curvature) to the amplitude of the original signal (in this case elevation) at the wavenumber ω . The theoretical gain for continuous waveforms of curvature
(i.e., not discrete filters like Equation 11) is ω^2 . The gain of a discrete filter is the modulus of the
wavenumber response function (Jenkins and Watts, 1968) (see page 296 in Jenkins and Watts, 1968),
so in the case of Equation 12 (12) the resultant gain, $G(\omega; \Delta x)$ is:

$$680 \quad G(\omega; \Delta x) = \frac{2}{(\Delta x)^2} [1 - 2\cos(\omega\Delta x) + \cos^2(\omega\Delta x)]^{1/2}. \quad (13)$$

In the case of our curvature filter (Equation 11), the gain function reveals how high frequency waveforms (e.g., ridgecrests, treethrow mounds, local roughness) in the elevation data involve relatively large values of curvature, whereas low frequency elevation waveforms (e.g., ridge-valley features or geologic folds) with the same amplitude involve relatively small curvatures. Crucially, how-
685 ever, the discrete filter does not retain all of the high frequency information. Some of this information is lost in the discretization process (i.e., it is lost because we are sampling the data at fixed intervals rather than having continuous information about the surface). We can calculate what information is lost by calculating the fidelity, which is the ratio between discrete gain (Equation 13) and the theoretical gain (ω^2):

$$690 \quad F(\omega; \Delta x) = \frac{2}{(\Delta x)^2 \omega^2} [1 - 2\cos(\omega\Delta x) + \cos^2(\omega\Delta x)]^{1/2}. \quad (14)$$

Again, fidelity is a measure of how closely our discrete filter (here curvature measured at discrete points in the landscape) reflects the true curvature (that is, the curvature measured if we had a perfectly continuous dataset). Fidelity is a function of the ratio between the grid interval and the wavelength (Figure 12); ~~when~~. When the fidelity is unity, the discrete filter exactly reproduces the
695 underlying continuous function. Again, the landscape (and its derivative metrics like curvature and gradient) has features at different wavelengths, such as long wavelength ridges and valleys to short wavelength tree throw mounds.

As the frequency approaches the Nyquist wavenumber(~~$L/2$~~ , defined as $\Delta x/L = 1/2$), fidelity decreases (Figure 12); a fidelity of only approximately 0.4 is achieved at the Nyquist wavenumber
700 itself. To achieve a fidelity, F , of 0.9 requires that $L/\Delta x$ is equal to approximately 6 grid points per wavelength. A fidelity $F = 0.95$ requires 8 points per wavelength, and $F = 0.99$ requires 18. Therefore, while the grid resolution imposes a minimum wavelength that can be resolved (defining defined by the Nyquist wavenumber), the behavior of the fidelity function (Figure 12), clearly illustrates that curvature information will be lost when calculated for features with wavelengths greater than, but
705 still close to the minimum resolvable at the Nyquist wavenumber. ~~In this simple example, using~~

What does this mean in practical terms? In our simple, one dimensional example, if we use 1 meter resolution data, ~~one could~~ we can only capture the curvature of a one dimensional ridgeline that had a wavelength of 3-4 meters (one does not need the entire wave to capture the peak of the waveform), but with loss of fidelity on the magnitude of the curvature (~~i.e., underestimating its value~~). Or, in other words, we would underestimate the magnitude of the curvature.

Another landscape metric that is widely measured is topographic gradient. In our study we have not computed how topographic gradient varies as a function of grid resolution because this has been examined by many previous authors (e.g., Gao, 1997; Warren et al., 2004; Vaze et al., 2010). However our treatment of the properties of a one dimensional filter can give some insight into previous results. Consider a simple central-difference approximation of the topographic gradient (S_x , dimensionless):

$$S_x = \frac{\zeta(x+\Delta x) - \zeta(x-\Delta x)}{2\Delta x}. \quad (15)$$

Equation (15) is yet another spectral filter, with weights of $2(\Delta x)^{-1}$ at $x + \Delta x$ and $-2(\Delta x)^{-1}$ at $x - \Delta x$. We can follow the same series of operations that we performed on Equation (11) to arrive at the fidelity of Equation (15), denoted as F_S , taking into account that the theoretical gain is ω (see Equation (7.3.8) in Jenkins and Watts, 1968):

$$F_S(\omega; \Delta x) = \frac{1}{\Delta x \omega} [\sin(\omega \Delta x)]. \quad (16)$$

The form of Equation (16) (Figure 12) formally illustrates why estimates of slope tend to systematically decrease with increasing grid interval Δx (Figure 12). Namely, an increasing Δx is able to resolve less local (high wavenumber) elevation structure while picking out the slope of more regional structure. The fidelity increases as the ratio of the grid interval to the wavelength, $\Delta x/L$, decreases (Figure 12). To achieve a fidelity $F_S = 0.9$, for example, requires $L/\Delta x$ or approximately 8 grid points per wavelength. A fidelity $F_S = 0.95$ requires 11 points per wavelength, and $F_S = 0.99$ requires 18. The fidelity of the one dimensional gradient operator goes to zero when approaching the Nyquist wavenumber ($\Delta x/L = 1/2$). These results explain the pronounced loss of gradient information in coarse resolution data observed by many authors (e.g., Gao, 1997; Warren et al., 2004; Vaze et al., 2010).

5.1.2 Total and tangential curvature

Having explored simplified one dimensional filters, we now return to our two dimensional results. Although real landscapes are two dimensional and we use polynomial fitting rather than simple differencing as in Equation (11), we can still use Equation (14) as a qualitative indicator of the grid spacing-resolution required for appropriate curvature estimates. In the Gabilan Mesa, where

ridgelines are broad, lower resolution data can still capture the curvature with relatively high fidelity. However, in locations with sharper ridgelines, such as Santa Cruz Island, the narrowest ridgelines are no longer adequately resolved as the grid ~~size is increased~~resolution is decreased, as can be seen in Figure 3(3).

The loss of fidelity predicted by the simple one dimensional system (Equation 14) qualitatively predicts the pattern observed in Figures (4 and 5), namely that the curvature values are smeared over a greater length-scale leading to apparently broader ridges with resolution, and a systematic under-estimation of their peak elevations. This highlights that in conjunction with data quality, landscape morphology also exerts a control on the optimal resolution to use for a given study, where landscapes with more gradual hillslope to valley transition morphologies can be analyzed using coarser resolution topographic data with more confidence. Although the identification of landscape morphology is often achieved through observations of high resolution topography, it can be achieved through field observations and the use of ancillary datasets, which allow the qualitative checking of results obtained from a low resolution dataset.

Santa Cruz Island and the Oregon Coast Range have the highest tangential curvature at 1 meter resolution. High tangential curvature at Santa Cruz Island corresponds to observations of extensive gullying and hillslope erosion (Pinter and Vestal, 2005; Perroy et al., 2012). In the ~~Oregon~~Oregon Coast Range, features such as pit and mound topography produced by tree throw and other biotic activity are resolved in the LiDAR dataset (Roering et al., 2010; Marshall and Roering, 2014), which manifest as an increase in values of curvature. However this could also be indicative of non-topographic noise in the DEM surface produced during the processing of the point clouds, which is particularly required in heavily forested locations (Liu, 2008; Meng et al., 2010) such as the Oregon Coast Range. This suggests an unfortunate collinearity between the two causes of small wavelength topographic noise and warrants further testing in future to disentangle synthetic and natural noise from high resolution topographic measurements. However, high curvature is not solely a manifestation of stochastic disturbance on local topographic roughness, but is also generated at narrow valley bottoms, and at ridgelines where erosion rates are rapid relative to the hillslope sediment transport coefficient (Roering et al., 2007; Hurst et al., 2012). Gabilan Mesa exhibits much lower curvature values than the other two locations, which is a consequence of high landscape diffusivity, indicating that sediment transport at Gabilan Mesa is dominated by diffusion-like processes (Roering et al., 2007), smoothing the landscape and reducing the tangential curvature of the hillslope surface.

5.2 Channel extraction

It is intuitive to consider that when extracting channel networks at any data resolution, regardless of method, the higher order, larger channels will be more accurately constrained than lower order channels. This pattern is observed in each of the study landscapes, with the majority of the variations in channel locations occurring in first and second order channels. Such loss of low order channels

from datasets has implications for studies focusing on upland areas, in particular where detailed
775 measurements which depend on channel network position are performed.

The contrast between the extent of channel networks and their indexes of quality for the two methods outline that a geometric method of channel extraction outperforms the process-based DrEICH algorithm. Due to the relative simplicity of the geometric method of channel extraction, errors inherent in the DEM are not compounded at the same scale as the DrEICH algorithm, which performs
780 more operations on topographic data. As the geometric method identifies channels based on their tangential curvature, although channel head features may be smoothed out of the DEM as ~~cell-size is increased~~resolution is decreased, the channel will still express some positive curvature in lower resolution data. The initiation point may be located downslope of the true channel head, but even in this worst case most of the channel network will be extracted correctly. This is observed in Figure 6
785 (6) which shows a gradual reduction in drainage density as the grid resolution is ~~increased~~decreased.

The indexes of quality defined by Orlandini et al. (2011) provide a clear framework to understand the quality of channel head predictions using these two methods as data resolution is decreased. In each case, the geometric method outperforms the DrEICH method, both in the accuracy of the channel heads which are predicted, and in the ability of the method to not predict channel heads
790 in locations where no channel exists. These indexes are influenced by the size of the search radius around each channel head, and reducing this radius would decrease the index values. However, the use of a 30 meter search radius allows comparisons to be drawn between predictions made at different data resolutions, and also between this study and that of Orlandini et al. (2011).

This assessment of high resolution methods on degraded quality data demonstrates the ongoing
795 challenges that channel extraction poses to the geomorphology community. Orlandini et al. (2011) performed extensive testing on channel extraction using threshold channel extraction methods, and demonstrated similar limitations when channels were extracted using lower resolution data. Our results suggest that a geometric method of channel extraction will provide an optimal channel network as data quality is reduced, particularly in uniform landscapes such as Gabilan Mesa. However, the
800 only way to ensure the highest quality results is to employ high resolution data in conjunction with field mapping of channel network extents.

5.3 Sediment transport coefficient

The predicted values of the sediment transport coefficient (D) for the 1 meter data fall within the range of values compiled by Hurst et al. (2013c), and estimated for the Oregon Coast Range and
805 Gabilan Mesa by Roering et al. (1999) and Roering et al. (2007). This suggests that this method can produce useful estimates of D when employing high resolution topography.

The sediment transport coefficients calculated at the Oregon Coast Range and Santa Cruz Island locations both increase with grid resolution, reflecting the sensitivity of C_{HT} to grid resolution in each of these locations. Despite the Oregon Coast Range eroding 45% more rapidly (Table 2)

than Santa Cruz Island, the rate of increase in D measurements remains similar between the two landscapes. Gabilan Mesa data are generally insensitive to ~~an increase in grid cell size~~ decrease in grid resolution, as the scale of hilltop widths measured in Gabilan Mesa is on the order of tens of meters. This allows datasets with ~~cell sizes~~ grid resolutions approaching half the width of a hilltop to provide an accurate estimate of hilltop curvature and thus, the sediment transport coefficient.

These data suggest that estimating D from low resolution topographic data is possible in many landscapes, particularly those which have average ridgelines broader than the grid resolution of the topographic data. In the case of landscapes with sharper ridgelines such as Santa Cruz Island and the Oregon Coast Range, it is more challenging to constrain D effectively as the grid resolution is ~~increased~~ decreased. The magnitude of overestimation of D between the highest and lowest resolution diffusivity estimates, $0.0023 \text{ m}^2 \text{ a}^{-1}$ in the case of the Oregon Coast range, will be a product of the uncertainty within the calculation of the erosion rate and material densities in addition to the local variations of D within each landscape.

5.4 Hillslope length and relief

Measurements of hillslope length and relief have been used to test sediment flux laws (Roering et al., 2007; Grieve et al., 2016a) and to identify landscape transience (Hurst et al., 2013b; Mudd, 2016). Such analyses have previously been restricted to high resolution topographic data. When considering hillslope length, we must select a grid resolution that is at least half the median hillslope length in order to resolve any useful information. However, in reality more than 2 pixels are required if any meaningful information is to be extracted from topographic data. As the median hillslope length for many landscapes has been shown to be in excess of 100 meters (Grieve et al., 2016a), this requirement for several pixels per hillslope falls well within the range of many lower resolution data products. Therefore, our results show that meaningful hillslope length measurements can be made from lower resolution topographic data, with data products approaching 30 meter resolution proving suitable in some cases.

The relief measurements for each landscape, however, show more sensitivity to grid resolution, with a systematic increase in the median values in each location beyond 10 meters grid resolution. As ~~increasing grid size~~ decreasing grid resolution acts as a low-pass filter on the landscape, the elevation of ridges are expected to be reduced, whilst the elevation of channel beds are raised, producing a net reduction in topographic relief. However, the increased relief observed with ~~increasing grid~~ size decreasing grid resolution is produced by the decrease in drainage density with ~~increasing grid~~ size decreasing resolution observed in Figure 6-(6) producing fewer channels reaching up towards ridgelines leading to hillslope flow paths traveling further downslope before reaching a channel.

By contrasting the L_H and R results computed using fixed and variable channel heads, it is clear that the optimal method for measuring hillslope length and relief is to employ as accurate a channel network as possible. However, the variable channel head data ~~shows~~ show that the signal of average

hillslope length and relief is broadly insensitive to data resolution up to grid ~~sizes~~ resolutions of at least 10 meters. This would facilitate the analysis of landscape transience using these measurements at a global scale, using high resolution satellite derived DEMs, such as TanDEM-X (Krieger et al., 2007). This relationship is again strongest in Gabilan Mesa, the landscape with the least topographic complexity which demonstrates the least sensitivity to curvature measurements and the estimation of diffusivity. However, even in the more noisy landscape of the Oregon Coast Range, meaningful hillslope length and relief measurements can still be made through the use of a geometric channel extraction algorithm and lower resolution topographic data.

6 Conclusions

Through generation of topographic data spanning the range of grid resolutions currently used in much of geomorphic research, a number of key metrics have been evaluated for their sensitivity to grid resolution. We have demonstrated the reduction in the range of total and tangential curvature values as grid resolution is decreased, across three test landscapes. These curvature measurements are important in the estimation of the hillslope sediment transport coefficient (D), in their use as a proxy for erosion rate, and in the extraction of channel networks from topographic data. We demonstrate that the estimation of D from low resolution topographic data is possible, particularly in landscapes such as Gabilan Mesa where hilltops are broad. Higher resolutions are required to extract meaningful curvature information in steep landscapes with sharp ridges and narrow gullies.

The extraction of channel networks from digital topographic data is a significant challenge at all spatial scales, as the definition of a channel network is integral in the execution of many analyses (e.g., DiBiase et al., 2012; Hurst et al., 2012; Grieve et al., 2016a). We demonstrate that the use of a geometric channel extraction algorithm produces channel networks for all three of our landscapes which correspond well to networks extracted from high resolution topography. This correspondence is tested through the computation of quality indexes for each predicted network, which outline the suitability of this algorithm over a process based method at coarse DEM resolutions.

Average values of hillslope length and relief for each landscape are shown to be broadly insensitive to grid resolution up to grid ~~sizes~~ resolutions which correspond to the highest resolution topographic data globally available. This indicates that these measurements can be used to identify landscape transience in locations where LiDAR data are unavailable. The accuracy of these measurements is dependent on the accuracy of the channel network used, however, as using a geometric method of channel extraction from the 1 meter DEM still provides robust measurements of hillslope length and relief.

The relationships between decreasing grid resolution and the geomorphic parameters explored here demonstrate the influence of the spatial scale of the topographic expression of process on the quality of results which can be extracted from lower resolution topography. From these analyses it

is challenging to identify a clear threshold below which data ~~becomes~~become unsuitable for use in geomorphic analysis. Rather, it is important to highlight the influence of landscape morphology and the dominant processes acting upon it in the selection of an appropriate data resolution for a study. Using this work as a framework, it is now possible to place constraints on the accuracy of results
885 derived from coarse resolution topographic data, particularly ~~in locations where no high-resolution data are available~~where non-topographic or field data can be used to provide insight into general landscape morphology.

Acknowledgements. The topographic data used in this study are freely available from <http://www.OpenTopography.org>, and the specific point clouds used can be downloaded from http://www.geos.ed.ac.uk/~s0675405/Res_Data/Res_Data_Pack.zip. All of the code used in this analysis is open source and the topographic analysis routines are available at http://github.com/LSDtopotools/LSD_Resolution and the code to generate the figures in this paper, alongside the raw plot data can be downloaded from http://github.com/sgrieve/Resolution_Paper_Figs. SMM and SWDG are funded by NERC grant NE/J009970/1 and SMM is funded by U.S. Army Research Office contract number W911NF-13-1-0478. FJC is funded by the Carnegie Foundation for the Universities
890 of Scotland. DTM was funded by a NERC Doctoral Training Grant NE/152830X/1 and NE/J500021/1. DJF was funded by US National Science Foundation grant EAR-1420831. We thank Marie-Alice Harel, [Kristin Sweeney](#), [Wolfgang Schwanghart](#), and two anonymous reviewers for comments on ~~an earlier version of the~~earlier versions of this manuscript.

Author contributions

900 SWDG, SMM, DTM and FJC wrote the software. SWDG performed the analysis. DJF and SMM resurrected the spectral filtering analysis from an unpublished 2002 manuscript, because they are lovers of the long game. SWDG wrote the paper with contributions from other authors.

Appendix A: Channel extraction parameters

This table provides the parameters used to generate channel networks both using the geometric
905 method and the DrEICH method. The drainage area value is used to thin the initial extracted network by removing channels which have a drainage area below the threshold value. The connected components value defines the point at which a group of contiguous channel pixels are considered to be connected. The $\frac{m}{n}$ ratio is determined using software provided by Mudd et al. (2014) and its use within this context is discussed in detail in Clubb et al. (2014).

Table A1. Parameters used by the geometric and process based techniques in the extraction of channel networks.

Location		Window radius (m)	Drainage area (m^2)	Connected components (Pixels)	$\frac{m}{n}$ ratio	Reference
Santa Cruz Island	4	4	5	0.50	This study	
Gabilan Mesa	5	4	5	0.45	Grieve et al. (2016a, b)	
Oregon Coast Range	4	4	5	0.45	Grieve et al. (2016a, b)	

910 References

- Anderson, E. S., Thompson, J. A., Crouse, D. A., and Austin, R. E.: Horizontal resolution and data density effects on remotely sensed LIDAR-based DEM, *Geoderma*, 132, 406–415, doi:10.1016/j.geoderma.2005.06.004, 2006.
- Anderson, R. S.: Evolution of the Santa Cruz Mountains, California, through tectonic growth and geomorphic decay, *Journal of Geophysical Research: Solid Earth*, 99, 20 161–20 179, doi:10.1029/94JB00713, 1994.
- 915 Andrews, D. J. and Bucknam, R. C.: Fitting degradation of shoreline scarps by a nonlinear diffusion model, *Journal of Geophysical Research: Solid Earth*, 92, 12 857–12 867, doi:10.1029/JB092iB12p12857, 1987.
- Beschta, R. L.: Long-term patterns of sediment production following road construction and logging in the Oregon Coast Range, *Water Resources Research*, 14, 1011–1016, doi:10.1029/WR014i006p01011, 1978.
- 920 Bierman, P., Clapp, E., Nichols, K., Gillespie, A., and Caffee, M. W.: Using Cosmogenic Nuclide Measurements In Sediments To Understand Background Rates Of Erosion And Sediment Transport, in: *Landscape Erosion and Evolution Modeling*, edited by Harmon, R. S. and III, W. W. D., pp. 89–115, Springer US, 2001.
- Booth, A. M., Roering, J. J., and Perron, J. T.: Automated landslide mapping using spectral analysis and high-resolution topographic data: Puget Sound lowlands, Washington, and Portland Hills, Oregon, *Geomorphology*, 109, 132–147, doi:10.1016/j.geomorph.2009.02.027, 2009.
- 925 Braun, J. and Willett, S. D.: A very efficient O(*n*), implicit and parallel method to solve the stream power equation governing fluvial incision and landscape evolution, *Geomorphology*, 180–181, 170–179, doi:10.1016/j.geomorph.2012.10.008, 2013.
- Burbank, D. W., Leland, J., Fielding, E., Anderson, R. S., Brozovic, N., Reid, M. R., and Duncan, C.: Bedrock incision, rock uplift and threshold hillslopes in the northwestern Himalayas, *Nature*, 379, 505–510, doi:10.1038/379505a0, 1996.
- 930 Carranza, E. J. M. and Castro, O. T.: Predicting Lahar-Inundation Zones: Case Study in West Mount Pinatubo, Philippines, *Natural Hazards*, 37, 331–372, doi:10.1007/s11069-005-6141-y, 2006.
- Chorley, R. J.: Climate and Morphometry, *The Journal of Geology*, 65, 628–638, 1957.

- 935 Claessens, L., Heuvelink, G. B. M., Schoorl, J. M., and Veldkamp, A.: DEM resolution effects on shallow landslide hazard and soil redistribution modelling, *Earth Surface Processes and Landforms*, 30, 461–477, doi:10.1002/esp.1155, 2005.
- Clubb, F. J., Mudd, S. M., Milodowski, D. T., Hurst, M. D., and Slater, L. J.: Objective extraction of channel heads from high-resolution topographic data, *Water Resources Research*, 50, 4283–4304, 940 doi:10.1002/2013WR015167, 2014.
- DeWitt, J. D., Warner, T. A., and Conley, J. F.: Comparison of DEMs derived from USGS DLG, SRTM, a statewide photogrammetry program, ASTER GDEM and LiDAR: implications for change detection, *GI-Science & Remote Sensing*, 52, 179–197, doi:10.1080/15481603.2015.1019708, 2015.
- DiBiase, R. A., Whipple, K. X., Heimsath, A. M., and Ouimet, W. B.: Landscape form and millennial 945 erosion rates in the San Gabriel Mountains, CA, *Earth and Planetary Science Letters*, 289, 134–144, doi:10.1016/j.epsl.2009.10.036, 2010.
- DiBiase, R. A., Heimsath, A. M., and Whipple, K. X.: Hillslope response to tectonic forcing in threshold landscapes, *Earth Surface Processes and Landforms*, 37, 855–865, doi:10.1002/esp.3205, 2012.
- Dietrich, W. E. and Dunne, T.: Sediment budget for a small catchment in mountainous terrain, *Z. Geomorphol.* 950 *Suppl.*, 29, 191–206, 1978.
- Dietrich, W. E., Wilson, C. J., Montgomery, D. R., McKean, J., and Bauer, R.: Erosion thresholds and land surface morphology, *Geology*, 20, 675–679, doi:10.1130/0091-7613(1992)020<0675:ETALSM>2.3.CO;2, 1992.
- Dietrich, W. E., Wilson, C. J., Montgomery, D. R., and McKean, J.: Analysis of Erosion Thresholds, Channel 955 Networks, and Landscape Morphology Using a Digital Terrain Model, *The Journal of Geology*, 101, 259–278, 1993.
- Dohrenwend, J. C.: Systematic valley asymmetry in the central California Coast Ranges, *Geological Society of America Bulletin*, 89, 891–900, doi:10.1130/0016-7606(1978)89<891:SVAITC>2.0.CO;2, 1978.
- Dohrenwend, J. C.: Morphologic Analysis of Gabilan Mesa by Iterative Contour-Generalization: An Improved 960 Method of Geomorphic Cartographic Analysis, *SEPM Pacific Coast Paleogeography Field Guide #4*, Menlo Park, California, pp. 83–87, 1979.
- Dunne, T., Zhang, W., and Aubry, B. F.: Effects of Rainfall, Vegetation, and Microtopography on Infiltration and Runoff, *Water Resources Research*, 27, 2271–2285, doi:10.1029/91WR01585, 1991.
- Dunne, T., Malmon, D. V., and Dunne, K. B. J.: Limits on the morphogenetic role of rain splash 965 transport in hillslope evolution, *Journal of Geophysical Research: Earth Surface*, 121, 2015JF003737, doi:10.1002/2015JF003737, 2016.
- Erskine, R. H., Green, T. R., Ramirez, J. A., and MacDonald, L. H.: Digital Elevation Accuracy and Grid Cell Size: Effects on Estimated Terrain Attributes, *Soil Science Society of America Journal*, 71, 1371, doi:10.2136/sssaj2005.0142, 2007.
- 970 Evans, I. S.: An integrated system of terrain analysis and slope mapping, *Zeitschrift für Geomorphologie, Supplementbände*, 36, 274–295, 1980.
- Freeman, T. G.: Calculating catchment area with divergent flow based on a regular grid, *Computers & Geosciences*, 17, 413–422, doi:10.1016/0098-3004(91)90048-I, 1991.

- Furbish, D. J., Haff, P. K., Dietrich, W. E., and Heimsath, A. M.: Statistical description of slope-dependent soil transport and the diffusion-like coefficient, *Journal of Geophysical Research: Earth Surface*, 114, F00A05, doi:10.1029/2009JF001267, 2009.
- Gabet, E. J., Pratt-Sitaula, B. A., and Burbank, D. W.: Climatic controls on hillslope angle and relief in the Himalayas, *Geology*, 32, 629–632, doi:10.1130/G20641.1, 2004.
- Gallen, S. F., Wegmann, K. W., Frankel, K. L., Hughes, S., Lewis, R. Q., Lyons, N., Paris, P., Ross, K., Bauer, J. B., and Witt, A. C.: Hillslope response to knickpoint migration in the Southern Appalachians: implications for the evolution of post-orogenic landscapes, *Earth Surface Processes and Landforms*, 36, 1254–1267, doi:10.1002/esp.2150, 2011.
- Gallen, S. F., Wegmann, K. W., and Bohnenstiehl, D. R.: Miocene rejuvenation of topographic relief in the southern Appalachians, *GSA Today*, 23, 4–10, doi:10.1130/GSATG163A.1, 2013.
- Gao, J.: Resolution and accuracy of terrain representation by grid DEMs at a micro-scale, *International Journal of Geographical Information Science*, 11, 199–212, doi:10.1080/136588197242464, 1997.
- Gilbert, G. K.: The Convexity of Hilltops, *The Journal of Geology*, 17, 344–350, 1909.
- Grieve, S. W., Mudd, S. M., and Hurst, M. D.: How long is a hillslope?, *Earth Surface Processes and Landforms*, 41, 1039–1054, doi:10.1002/esp.3884, 2016a.
- Grieve, S. W. D., Mudd, S. M., Hurst, M. D., and Milodowski, D. T.: A nondimensional framework for exploring the relief structure of landscapes, *Earth Surface Dynamics*, 4, 309–325, doi:10.5194/esurf-4-309-2016, 2016b.
- He, L., Chao, Y., and Suzuki, K.: A Run-Based Two-Scan Labeling Algorithm, *IEEE Transactions on Image Processing*, 17, 749–756, doi:10.1109/TIP.2008.919369, 2008.
- Heimsath, A. M., Dietrich, W. E., Nishiizumi, K., and Finkel, R. C.: Stochastic processes of soil production and transport: erosion rates, topographic variation and cosmogenic nuclides in the Oregon Coast Range, *Earth Surface Processes and Landforms*, 26, 531–552, doi:10.1002/esp.209, 2001.
- Hillel, D.: *Fundamentals of soil physics*, Academic Press, San Diego, 1980.
- Hilley, G. E. and Arrowsmith, J. R.: Geomorphic response to uplift along the Dragon’s Back pressure ridge, Carrizo Plain, California, *Geology*, 36, 367–370, doi:10.1130/G24517A.1, 2008.
- Hodgson, M. E., Jensen, J. R., Schmidt, L., Schill, S., and Davis, B.: An evaluation of LIDAR- and IFSAR-derived digital elevation models in leaf-on conditions with USGS Level 1 and Level 2 DEMs, *Remote Sensing of Environment*, 84, 295–308, doi:10.1016/S0034-4257(02)00114-1, 2003.
- Horton, R. E.: Drainage-basin characteristics, *Transactions, American Geophysical Union*, 13, 350, doi:10.1029/TR013i001p00350, 1932.
- Hovius, N.: Regular spacing of drainage outlets from linear mountain belts, *Basin Research*, 8, 29–44, doi:10.1111/j.1365-2117.1996.tb00113.x, 1996.
- Howard, A. D.: Badland morphology and evolution: Interpretation using a simulation model, *Earth Surface Processes and Landforms*, 22, 211–227, 1997.
- Hurst, M. D., Mudd, S. M., Walcott, R., Attal, M., and Yoo, K.: Using hilltop curvature to derive the spatial distribution of erosion rates, *Journal of Geophysical Research: Earth Surface*, 117, F02017, doi:10.1029/2011JF002057, 2012.

Hurst, M. D., Ellis, M. A., Royse, K. R., Lee, K. A., and Freeborough, K.: Controls on the magnitude-frequency scaling of an inventory of secular landslides, *Earth Surface Dynamics*, 1, 67–78, doi:10.5194/esurf-1-67-2013, 2013a.

Hurst, M. D., Mudd, S. M., Attal, M., and Hilley, G.: Hillslopes Record the Growth and Decay of Landscapes, *Science*, 341, 868–871, doi:10.1126/science.1241791, 2013b.

Hurst, M. D., Mudd, S. M., Yoo, K., Attal, M., and Walcott, R.: Influence of lithology on hillslope morphology and response to tectonic forcing in the northern Sierra Nevada of California, *Journal of Geophysical Research: Earth Surface*, 118, 832–851, doi:10.1002/jgrf.20049, 2013c.

Hutchinson, M. F. and Dowling, T. I.: A continental hydrological assessment of a new grid-based digital elevation model of Australia, *Hydrological Processes*, 5, 45–58, doi:10.1002/hyp.3360050105, 1991.

Jefferson, A. J. and McGee, R. W.: Channel network extent in the context of historical land use, flow generation processes, and landscape evolution in the North Carolina Piedmont, *Earth Surface Processes and Landforms*, 38, 601–613, doi:10.1002/esp.3308, 2013.

Jenkins, G. M. and Watts, D. G.: *Spectral analysis and its applications*, Holden-Day, San Francisco, 1968.

Jenson, S. K.: Applications of hydrologic information automatically extracted from digital elevation models, *Hydrological Processes*, 5, 31–44, doi:10.1002/hyp.3360050104, 1991.

Julian, J. P., Elmore, A. J., and Guinn, S. M.: Channel head locations in forested watersheds across the mid-Atlantic United States: A physiographic analysis, *Geomorphology*, 177–178, 194–203, doi:10.1016/j.geomorph.2012.07.029, 2012.

Kelsey, H. M., Ticknor, R. L., Bockheim, J. G., and Mitchell, E.: Quaternary upper plate deformation in coastal Oregon, *Geological Society of America Bulletin*, 108, 843–860, doi:10.1130/0016-7606(1996)108<0843:QUPDIC>2.3.CO;2, 1996.

Kenward, T., Lettenmaier, D. P., Wood, E. F., and Fielding, E.: Effects of Digital Elevation Model Accuracy on Hydrologic Predictions, *Remote Sensing of Environment*, 74, 432–444, doi:10.1016/S0034-4257(00)00136-X, 2000.

Kim, H., Arrowsmith, J., Crosby, C. J., Jaeger-Frank, E., Nandigam, V., Memon, A., Conner, J., Baden, S. B., and Baru, C.: An efficient implementation of a local binning algorithm for digital elevation model generation of LiDAR/ALSM dataset, in: *AGU Fall Meeting Abstracts*, vol. 1, p. 0921, San Francisco, 2006.

Koons, P. O.: The topographic evolution of collisional mountain belts; a numerical look at the Southern Alps, New Zealand, *American Journal of Science*, 289, 1041–1069, doi:10.2475/ajs.289.9.1041, 1989.

Krieger, G., Moreira, A., Fiedler, H., Hajnsek, I., Werner, M., Younis, M., and Zink, M.: TanDEM-X: A Satellite Formation for High-Resolution SAR Interferometry, *IEEE Transactions on Geoscience and Remote Sensing*, 45, 3317–3341, doi:10.1109/TGRS.2007.900693, 2007.

Krishnan, S., Crosby, C., Nandigam, V., Phan, M., Cowart, C., Baru, C., and Arrowsmith, R.: OpenTopography: A Services Oriented Architecture for Community Access to LIDAR Topography, in: *Proceedings of the 2Nd International Conference on Computing for Geospatial Research & Applications, COM.Geo '11*, pp. 7:1–7:8, ACM, New York, NY, USA, doi:10.1145/1999320.1999327, 2011.

Larsen, I. J., Montgomery, D. R., and Greenberg, H. M.: The contribution of mountains to global denudation, *Geology*, 42, 527–530, doi:10.1130/G35136.1, 2014.

Lashermes, B., Foufoula-Georgiou, E., and Dietrich, W. E.: Channel network extraction from high resolution topography using wavelets, *Geophysical Research Letters*, 34, L23S04, doi:10.1029/2007GL031140, 2007.

Liu, B., Nearing, M., Shi, P., and Jia, Z.: Slope Length Effects on Soil Loss for Steep Slopes, *Soil Science Society of America Journal*, 64, 1759, doi:10.2136/sssaj2000.6451759x, 2000.

Liu, X.: Airborne LiDAR for DEM generation: some critical issues, *Progress in Physical Geography*, 32, 31–49, doi:10.1177/0309133308089496, 2008.

Mark, D. M.: Automated Detection Of Drainage Networks From Digital Elevation Models, *Cartographica: The International Journal for Geographic Information and Geovisualization*, 21, 168–178, doi:10.3138/10LM-4435-6310-251R, 1984.

Marshall, J. A. and Roering, J. J.: Diagenetic variation in the Oregon Coast Range: Implications for rock strength, soil production, hillslope form, and landscape evolution, *Journal of Geophysical Research: Earth Surface*, 119, 2013JF003004, doi:10.1002/2013JF003004, 2014.

Meng, X., Currit, N., and Zhao, K.: Ground Filtering Algorithms for Airborne LiDAR Data: A Review of Critical Issues, *Remote Sensing*, 2, 833–860, doi:10.3390/rs2030833, 2010.

Milodowski, D. T., Mudd, S. M., and Mitchard, E. T.: Erosion rates as a potential bottom-up control of forest structural characteristics in the Sierra Nevada Mountains, *Ecology*, 96, 31–38, 2015a.

Milodowski, D. T., Mudd, S. M., and Mitchard, E. T. A.: Topographic roughness as a signature of the emergence of bedrock in eroding landscapes, *Earth Surface Dynamics*, 3, 483–499, doi:10.5194/esurf-3-483-2015, 2015b.

Mitášová, H. and Hofierka, J.: Interpolation by regularized spline with tension: II. Application to terrain modeling and surface geometry analysis, *Mathematical Geology*, 25, 657–669, doi:10.1007/BF00893172, 1993.

Montgomery, D. R.: Slope Distributions, Threshold Hillslopes, and Steady-state Topography, *American Journal of Science*, 301, 432–454, doi:10.2475/ajs.301.4-5.432, 2001.

Montgomery, D. R. and Dietrich, W. E.: Source areas, drainage density, and channel initiation, *Water Resources Research*, 25, 1907–1918, doi:10.1029/WR025i008p01907, 1989.

Montgomery, D. R. and Dietrich, W. E.: A physically based model for the topographic control on shallow landsliding, *Water Resources Research*, 30, 1153–1171, doi:10.1029/93WR02979, 1994.

Moore, I. D., Grayson, R. B., and Ladson, A. R.: Digital terrain modelling: A review of hydrological, geomorphological, and biological applications, *Hydrological Processes*, 5, 3–30, doi:10.1002/hyp.3360050103, 1991.

Mudd, S. M.: Detection of transience in eroding landscapes, *Earth Surface Processes and Landforms*, doi:10.1002/esp.3923, 2016.

Mudd, S. M. and Furbish, D. J.: Influence of chemical denudation on hillslope morphology, *Journal of Geophysical Research: Earth Surface*, 109, F02001, doi:10.1029/2003JF000087, 2004.

Mudd, S. M., Attal, M., Milodowski, D. T., Grieve, S. W. D., and Valters, D. A.: A statistical framework to quantify spatial variation in channel gradients using the integral method of channel profile analysis, *Journal of Geophysical Research: Earth Surface*, 119, 2013JF002981, doi:10.1002/2013JF002981, 2014.

Muhs, D. R., Simmons, K. R., Schumann, R. R., Groves, L. T., DeVogel, S. B., Minor, S. A., and Laurel, D.: Coastal tectonics on the eastern margin of the Pacific Rim: late Quaternary sea-level history and up-

- lift rates, Channel Islands National Park, California, USA, *Quaternary Science Reviews*, 105, 209–238, doi:10.1016/j.quascirev.2014.09.017, 2014.
- Murphy, P. N. C., Ogilvie, J., Meng, F.-R., and Arp, P.: Stream network modelling using lidar and photogrammetric digital elevation models: a comparison and field verification, *Hydrological Processes*, 22, 1747–1754, doi:10.1002/hyp.6770, 2008.
- Nearing, M. A.: A single, continuous function for slope steepness influence on soil loss, *Soil Science Society of America Journal*, 61, 917–919, wOS:A1997XC99600029, 1997.
- O’Callaghan, J. F. and Mark, D. M.: The extraction of drainage networks from digital elevation data, *Computer Vision, Graphics, and Image Processing*, 28, 323–344, doi:10.1016/S0734-189X(84)80011-0, 1984.
- Orlandini, S., Tarolli, P., Moretti, G., and Dalla Fontana, G.: On the prediction of channel heads in a complex alpine terrain using gridded elevation data, *Water Resources Research*, 47, W02538, doi:10.1029/2010WR009648, 2011.
- Passalacqua, P., Do Trung, T., Foufoula-Georgiou, E., Sapiro, G., and Dietrich, W. E.: A geometric framework for channel network extraction from lidar: Nonlinear diffusion and geodesic paths, *Journal of Geophysical Research: Earth Surface*, 115, F01002, doi:10.1029/2009JF001254, 2010.
- Pelletier, J. D.: A robust, two-parameter method for the extraction of drainage networks from high-resolution digital elevation models (DEMs): Evaluation using synthetic and real-world DEMs, *Water Resources Research*, 49, 75–89, doi:10.1029/2012WR012452, 2013.
- Pelletier, J. D. and Cline, M. L.: Nonlinear slope-dependent sediment transport in cinder cone evolution, *Geology*, 35, 1067–1070, doi:10.1130/G23992A.1, 2007.
- Pelletier, J. D., McGuire, L. A., Ash, J. L., Engelder, T. M., Hill, L. E., Leroy, K. W., Orem, C. A., Rosenthal, W. S., Trees, M. A., Rasmussen, C., and Chorover, J.: Calibration and testing of upland hillslope evolution models in a dated landscape: Banco Bonito, New Mexico, *Journal of Geophysical Research: Earth Surface*, 116, F04004, doi:10.1029/2011JF001976, 2011.
- Perron, J. T. and Royden, L.: An integral approach to bedrock river profile analysis, *Earth Surface Processes and Landforms*, 38, 570–576, doi:10.1002/esp.3302, 2013.
- Perron, J. T., Dietrich, W. E., and Kirchner, J. W.: Controls on the spacing of first-order valleys, *Journal of Geophysical Research: Earth Surface*, 113, F04016, doi:10.1029/2007JF000977, 2008a.
- Perron, J. T., Kirchner, J. W., and Dietrich, W. E.: Spectral signatures of characteristic spatial scales and nonfractal structure in landscapes, *Journal of Geophysical Research: Earth Surface*, 113, F04003, doi:10.1029/2007JF000866, 2008b.
- Perron, J. T., Kirchner, J. W., and Dietrich, W. E.: Formation of evenly spaced ridges and valleys, *Nature*, 460, 502–505, doi:10.1038/nature08174, 2009.
- Perroy, R. L., Bookhagen, B., Asner, G. P., and Chadwick, O. A.: Comparison of gully erosion estimates using airborne and ground-based LiDAR on Santa Cruz Island, California, *Geomorphology*, 118, 288–300, doi:10.1016/j.geomorph.2010.01.009, 2010.
- Perroy, R. L., Bookhagen, B., Chadwick, O. A., and Howarth, J. T.: Holocene and Anthropocene Landscape Change: Arroyo Formation on Santa Cruz Island, California, *Annals of the Association of American Geographers*, 102, 1229–1250, doi:10.1080/00045608.2012.715054, 2012.

- 1130 Pinter, N. and Vestal, W. D.: El Niño–driven landsliding and postgrazing vegetative recovery, Santa Cruz Island, California, *Journal of Geophysical Research: Earth Surface*, 110, F02 003, doi:10.1029/2004JF000203, 2005.
- Pinter, N., Lueddecke, S. B., Keller, E. A., and Simmons, K. R.: Late Quaternary slip on the Santa Cruz Island fault, California, *Geological Society of America Bulletin*, 110, 711–722, doi:10.1130/0016-7606(1998)110<0711:LQSOTS>2.3.CO;2, 1998.
- 1135 Pinter, N., Sorlien, C. C., and Scott, A. T.: Fault-related fold growth and isostatic subsidence, California Channel Islands, *American Journal of Science*, 303, 300–318, doi:10.2475/ajs.303.4.300, 2003.
- Qin, C.-Z. and Zhan, L.: Parallelizing flow-accumulation calculations on graphics processing units—From iterative DEM preprocessing algorithm to recursive multiple-flow-direction algorithm, *Computers & Geosciences*, 43, 7–16, doi:10.1016/j.cageo.2012.02.022, 2012.
- 1140 Quinn, P., Beven, K., Chevallier, P., and Planchon, O.: The prediction of hillslope flow paths for distributed hydrological modelling using digital terrain models, *Hydrological Processes*, 5, 59–79, doi:10.1002/hyp.3360050106, 1991.
- Rabus, B., Eineder, M., Roth, A., and Bamler, R.: The shuttle radar topography mission—a new class of digital elevation models acquired by spaceborne radar, *ISPRS Journal of Photogrammetry and Remote Sensing*, 57, 241–262, doi:10.1016/S0924-2716(02)00124-7, 2003.
- 1145 Reneau, S. L. and Dietrich, W. E.: Erosion rates in the southern oregon coast range: Evidence for an equilibrium between hillslope erosion and sediment yield, *Earth Surface Processes and Landforms*, 16, 307–322, doi:10.1002/esp.3290160405, 1991.
- Roering, J. J.: How well can hillslope evolution models “explain” topography? Simulating soil transport and production with high-resolution topographic data, *Geological Society of America Bulletin*, 120, 1248–1262, doi:10.1130/B26283.1, 2008.
- 1150 Roering, J. J., Kirchner, J. W., and Dietrich, W. E.: Evidence for nonlinear, diffusive sediment transport on hillslopes and implications for landscape morphology, *Water Resources Research*, 35, 853–870, doi:10.1029/1998WR900090, 1999.
- 1155 Roering, J. J., Kirchner, J. W., and Dietrich, W. E.: Hillslope evolution by nonlinear, slope-dependent transport: Steady state morphology and equilibrium adjustment timescales, *Journal of Geophysical Research: Solid Earth*, 106, 16 499–16 513, doi:10.1029/2001JB000323, 2001.
- Roering, J. J., Perron, J. T., and Kirchner, J. W.: Functional relationships between denudation and hillslope form and relief, *Earth and Planetary Science Letters*, 264, 245–258, doi:10.1016/j.epsl.2007.09.035, 2007.
- 1160 Roering, J. J., Marshall, J., Booth, A. M., Mort, M., and Jin, Q.: Evidence for biotic controls on topography and soil production, *Earth and Planetary Science Letters*, 298, 183–190, doi:10.1016/j.epsl.2010.07.040, 2010.
- Royden, L. H., Clark, M. K., and Whipple, K. X.: Evolution of river elevation profiles by bedrock incision: Analytical solutions for transient river profiles related to changing uplift and precipitation rates, *Eos Trans. AGU*, 81, 48, 2000.
- 1165 Saha, A. K., Gupta, R. P., and Arora, M. K.: GIS-based Landslide Hazard Zonation in the Bhagirathi (Ganga) Valley, Himalayas, *International Journal of Remote Sensing*, 23, 357–369, doi:10.1080/01431160010014260, 2002.

- Schmidt, J., Evans, I. S., and Brinkmann, J.: Comparison of polynomial models for land surface curvature calculation, *International Journal of Geographical Information Science*, 17, 797–814, doi:10.1080/13658810310001596058, 2003.
- Schmidt, K. M., Roering, J. J., Stock, J. D., Dietrich, W. E., Montgomery, D. R., and Schaub, T.: The variability of root cohesion as an influence on shallow landslide susceptibility in the Oregon Coast Range, *Canadian Geotechnical Journal*, 38, 995–1024, doi:10.1139/t01-031, 2001.
- Schoorl, J. M., Sonneveld, M. P. W., and Veldkamp, A.: Three-dimensional landscape process modelling: The effect of DEM resolution, *Earth Surface Processes and Landforms*, 25, 1025–1034, doi:10.1002/1096-9837(200008)25:9<1025::AID-ESP116>3.0.CO;2-Z, wOS:000089231600007, 2000.
- Schumm, S. A.: Evolution of Drainage Systems and Slopes in Badlands at Perth Amboy, New Jersey, *Geological Society of America Bulletin*, 67, 597–646, doi:10.1130/0016-7606(1956)67[597:EODSAS]2.0.CO;2, 1956.
- Schwanghart, W. and Scherler, D.: Short Communication: TopoToolbox 2 – MATLAB-based software for topographic analysis and modeling in Earth surface sciences, *Earth Surface Dynamics*, 2, 1–7, doi:10.5194/esurf-2-1-2014, 2014.
- Shreve, F.: The Vegetation of a Coastal Mountain Range, *Ecology*, 8, 27–44, doi:10.2307/1929384, 1927.
- Sørensen, R. and Seibert, J.: Effects of DEM resolution on the calculation of topographical indices: TWI and its components, *Journal of Hydrology*, 347, 79–89, doi:10.1016/j.jhydrol.2007.09.001, 2007.
- Sweeney, K. E., Roering, J. J., and Ellis, C.: Experimental evidence for hillslope control of landscape scale, *Science*, 349, 51–53, doi:10.1126/science.aab0017, 2015.
- Talling, P. J., Stewart, M. D., Stark, C. P., Gupta, S., and Vincent, S. J.: Regular spacing of drainage outlets from linear fault blocks, *Basin Research*, 9, 275–302, 1997.
- Tarboton, D. G.: A new method for the determination of flow directions and upslope areas in grid digital elevation models, *Water Resources Research*, 33, 309–319, doi:10.1029/96WR03137, 1997.
- Tarboton, D. G., Bras, R. L., and Rodriguez-Iturbe, I.: On the extraction of channel networks from digital elevation data, *Hydrological Processes*, 5, 81–100, doi:10.1002/hyp.3360050107, 1991.
- Tarolli, P.: High-resolution topography for understanding Earth surface processes: Opportunities and challenges, *Geomorphology*, 216, 295–312, doi:10.1016/j.geomorph.2014.03.008, 2014.
- Tarolli, P. and Dalla Fontana, G.: Hillslope-to-valley transition morphology: New opportunities from high resolution DTMs, *Geomorphology*, 113, 47–56, doi:10.1016/j.geomorph.2009.02.006, 2009.
- Tarolli, P. and Tarboton, D. G.: A new method for determination of most likely landslide initiation points and the evaluation of digital terrain model scale in terrain stability mapping, *Hydrology and Earth System Sciences*, 10, 663–677, doi:10.5194/hess-10-663-2006, <http://www.hydrol-earth-syst-sci.net/10/663/2006/>, 2006.
- Tesfa, T. K., Tarboton, D. G., Watson, D. W., Schreuders, K. A. T., Baker, M. E., and Wallace, R. M.: Extraction of hydrological proximity measures from DEMs using parallel processing, *Environmental Modelling & Software*, 26, 1696–1709, doi:10.1016/j.envsoft.2011.07.018, 2011.
- Thompson, J. A., Bell, J. C., and Butler, C. A.: Digital elevation model resolution: effects on terrain attribute calculation and quantitative soil-landscape modeling, *Geoderma*, 100, 67–89, doi:10.1016/S0016-7061(00)00081-1, 2001.

- Thompson, S. E., Katul, G. G., and Porporato, A.: Role of microtopography in rainfall-runoff partitioning: An analysis using idealized geometry, *Water Resources Research*, 46, W07 520, doi:10.1029/2009WR008835, 2010.
- 1210 Tucker, G. E., Catani, F., Rinaldo, A., and Bras, R. L.: Statistical analysis of drainage density from digital terrain data, *Geomorphology*, 36, 187–202, doi:10.1016/S0169-555X(00)00056-8, 2001.
- Vaze, J., Teng, J., and Spencer, G.: Impact of DEM accuracy and resolution on topographic indices, *Environmental Modelling & Software*, 25, 1086–1098, doi:10.1016/j.envsoft.2010.03.014, 2010.
- Vianello, A., Cavalli, M., and Tarolli, P.: LiDAR-derived slopes for headwater channel network analysis, 1215 *CATENA*, 76, 97–106, doi:10.1016/j.catena.2008.09.012, 2009.
- Walker, J. P. and Willgoose, G. R.: A Comparative Study of Australian Cartometric and Photogrammetric Digital Elevation Model Accuracy, *Photogrammetric Engineering & Remote Sensing*, 72, 771–779, doi:10.14358/PERS.72.7.771, 2006.
- Warren, S. D., Hohmann, M. G., Auerswald, K., and Mitsova, H.: An evaluation of methods to determine slope 1220 using digital elevation data, *CATENA*, 58, 215–233, doi:10.1016/j.catena.2004.05.001, 2004.
- Wiener, N.: Extrapolation, interpolation, and smoothing of stationary time series, vol. 2, MIT press Cambridge, MA, 1949.
- Wolock, D. M. and McCabe, G. J.: Differences in topographic characteristics computed from 100- and 1000- 1225 m resolution digital elevation model data, *Hydrological Processes*, 14, 987–1002, doi:10.1002/(SICI)1099-1085(20000430)14:6<987::AID-HYP980>3.0.CO;2-A, 2000.
- Wolock, D. M. and Price, C. V.: Effects of digital elevation model map scale and data resolution on a topography-based watershed model, *Water Resources Research*, 30, 3041–3052, doi:10.1029/94WR01971, 1994.
- Wu, S., Li, J., and Huang, G. H.: A study on DEM-derived primary topographic attributes for 1230 hydrologic applications: Sensitivity to elevation data resolution, *Applied Geography*, 28, 210–223, doi:10.1016/j.apgeog.2008.02.006, 2008.
- Yamaguchi, Y., Kahle, A., Tsu, H., Kawakami, T., and Pniel, M.: Overview of Advanced Spaceborne Thermal Emission and Reflection Radiometer (ASTER), *IEEE Transactions on Geoscience and Remote Sensing*, 36, 1062–1071, doi:10.1109/36.700991, 1998.
- 1235 Zevenbergen, L. W. and Thorne, C. R.: Quantitative analysis of land surface topography, *Earth surface processes and landforms*, 12, 47–56, 1987.
- Zhang, T. Y. and Suen, C. Y.: A Fast Parallel Algorithm for Thinning Digital Patterns, *Commun. ACM*, 27, 236–239, doi:10.1145/357994.358023, 1984.
- Zhang, W. and Montgomery, D. R.: Digital elevation model grid size, landscape representation, and hydrologic 1240 simulations, *Water Resources Research*, 30, 1019–1028, doi:10.1029/93WR03553, 1994.

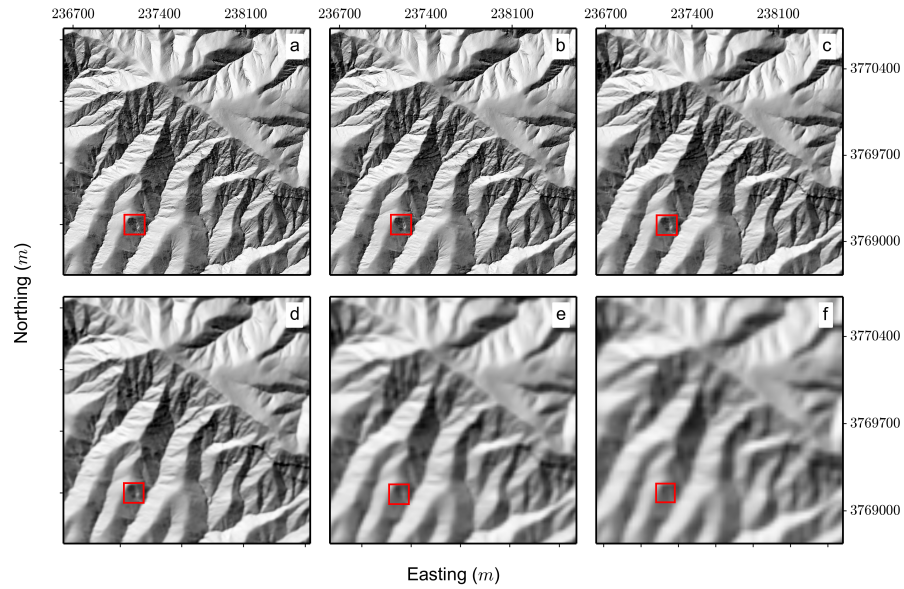


Figure 1. Example shaded reliefs of the same section of Santa Cruz Island at increasing grid resolutions. All coordinates are in UTM Zone 11N. Panels a to f represent resolutions of 1, 2, 5, 10, 20 and 30 meters. Tick spacing is in meters. The red box outlines an extensively gullied first order drainage, clearly visible in the highest resolution data, but as the grid ~~size-resolution~~ is ~~increased~~~~decreased~~, this feature, and its internal structure becomes indistinguishable from the surrounding hillslopes.

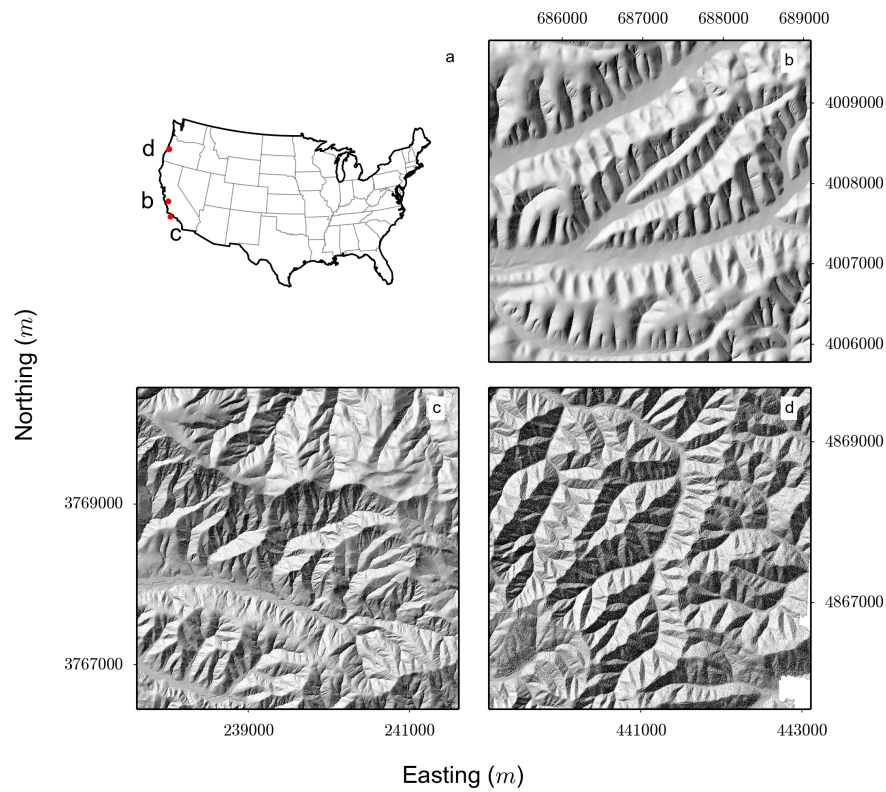


Figure 2. (a) Map showing the location of each of the study sites within the USA. (b-d) Shaded reliefs of representative sections of each study site, generated from 1 meter resolution data. [Tick spacing is in meters.](#) All coordinates are in UTM. (b) Gabilan Mesa, California, UTM Zone 10N. (c) Santa Cruz Island, California, UTM Zone 11N. (d) Oregon Coast Range, Oregon, UTM Zone 10N.

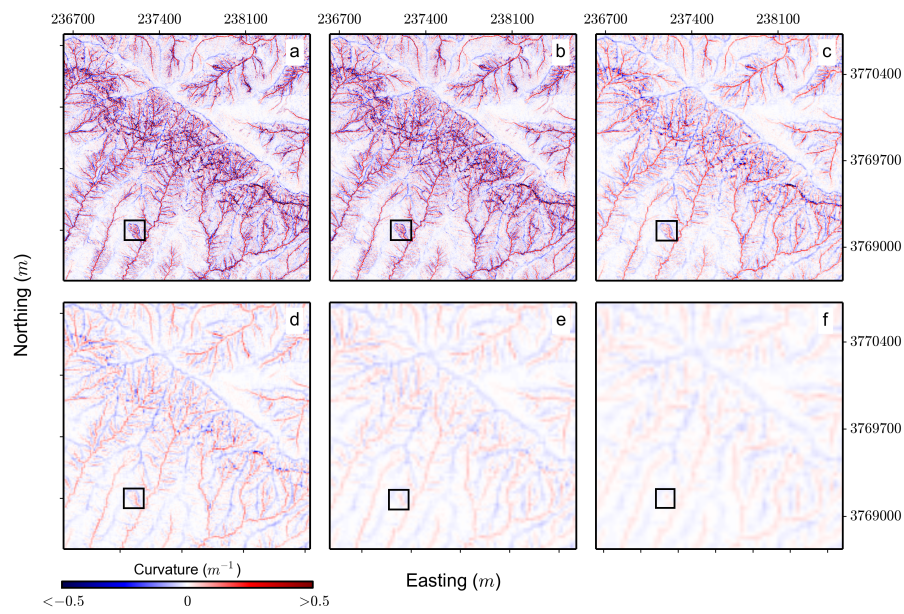


Figure 3. Maps showing the spatial variation in total curvature measurements as grid resolution is decreased for the same section of Santa Cruz Island as displayed in Figure 1. All coordinates are in UTM Zone 11N. Panels a to f represent resolutions of 1, 2, 5, 10, 20 and 30 meters. Tick spacing is in meters. The black boxes outline the same features as highlighted in Figure (1), showing the reduction in the curvature signal with grid resolution for such a feature.

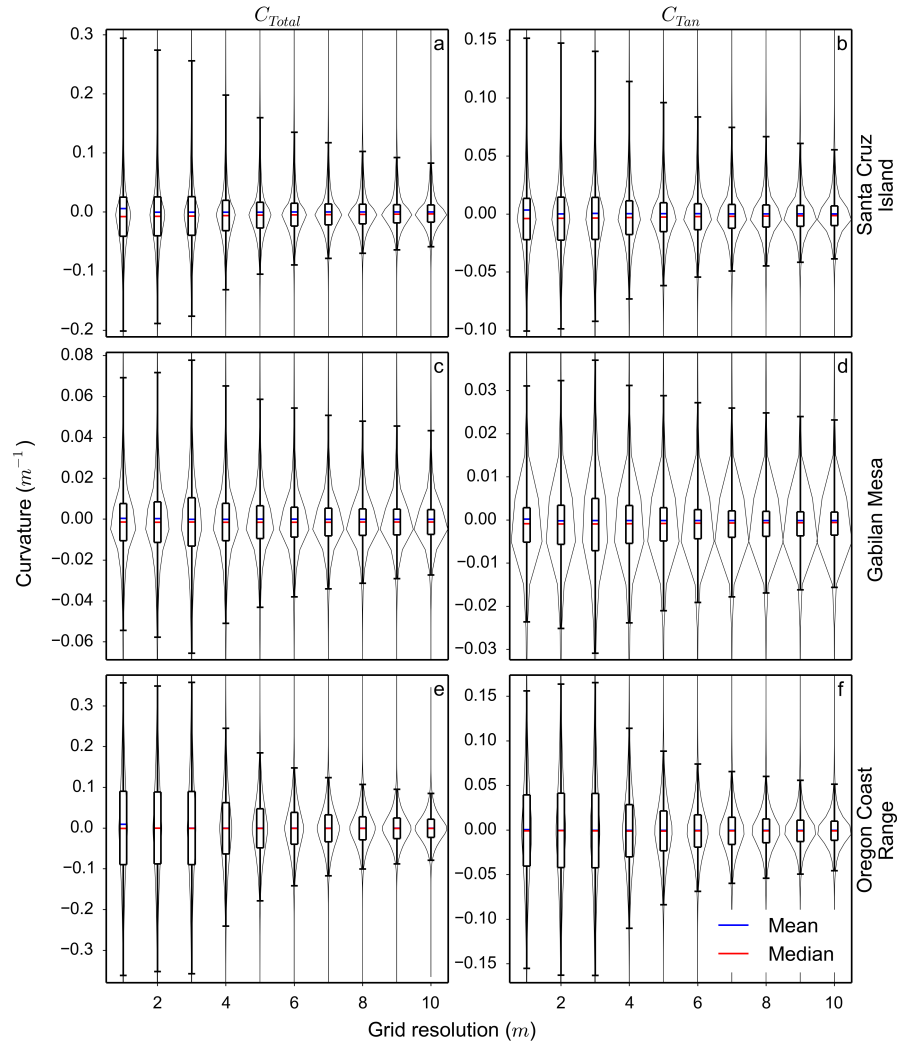


Figure 4. Plots of the distribution of C_{Total} (a, c and e) and C_{Tan} (b, d and f) measurements as resolution is decreased for each of the study landscapes. Whiskers are the 2nd and 98th percentiles, the box covers the 25th and 75th percentiles, the blue bar is the mean and the red bar is the median. The gray outline is the probability density function of each dataset.

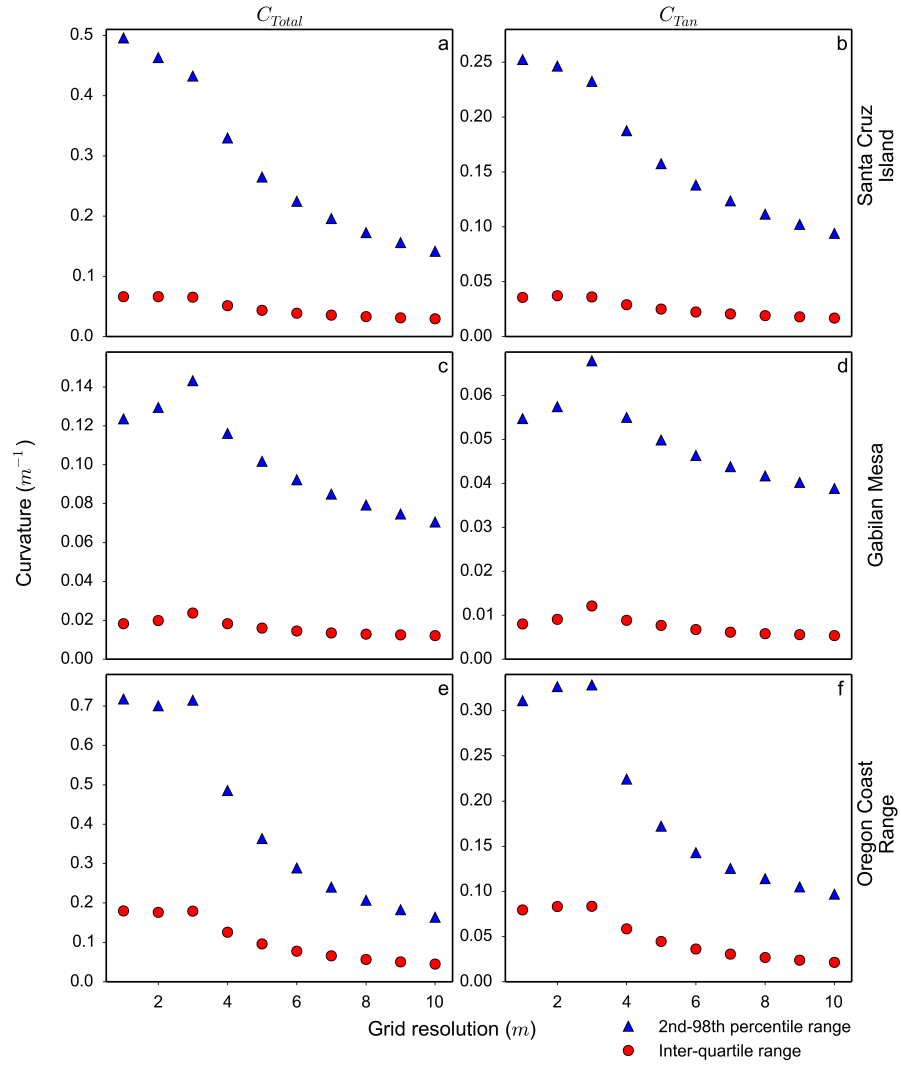


Figure 5. Plots of the reduction in range between the 2nd and 98th percentiles (blue triangles) and the inter-quartile range (red circles) of C_{Total} (a, c and e) and C_{Tan} (b, d and f) measurements as resolution is decreased for each of the study landscapes.

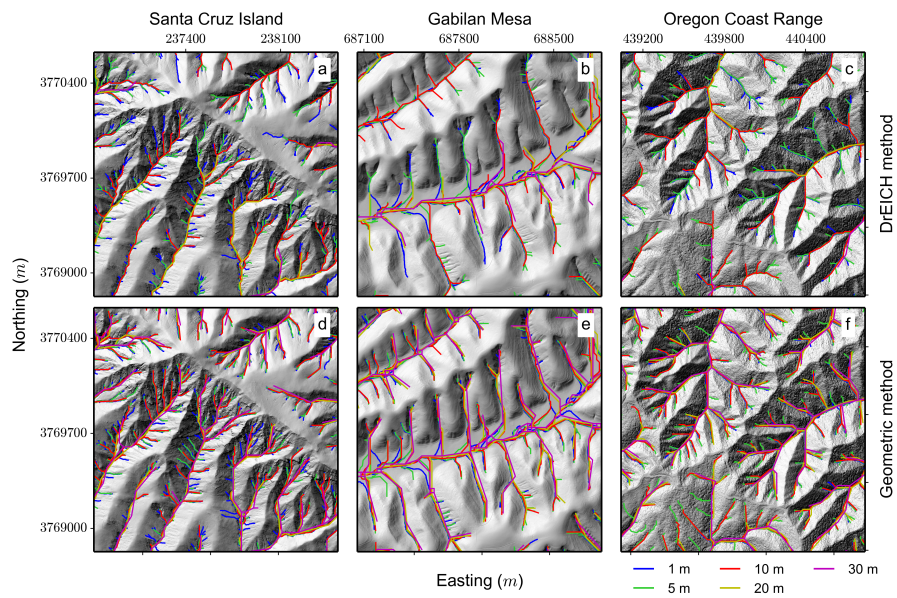


Figure 6. Representative sections of each landscape’s channel network displaying the extent of each network as grid resolution is ~~increased~~decreased. Plots a, b and c are generated using the DrEICH method of channel extraction. Plots d, e and f are generated using the geometric method. All coordinates are in UTM. Tick spacing is in meters. The left column is from Santa Cruz Island, UTM Zone 11N, the central column is from Gabilan Mesa, UTM Zone 10N and the right column is from the Oregon Coast Range, UTM Zone 10N.

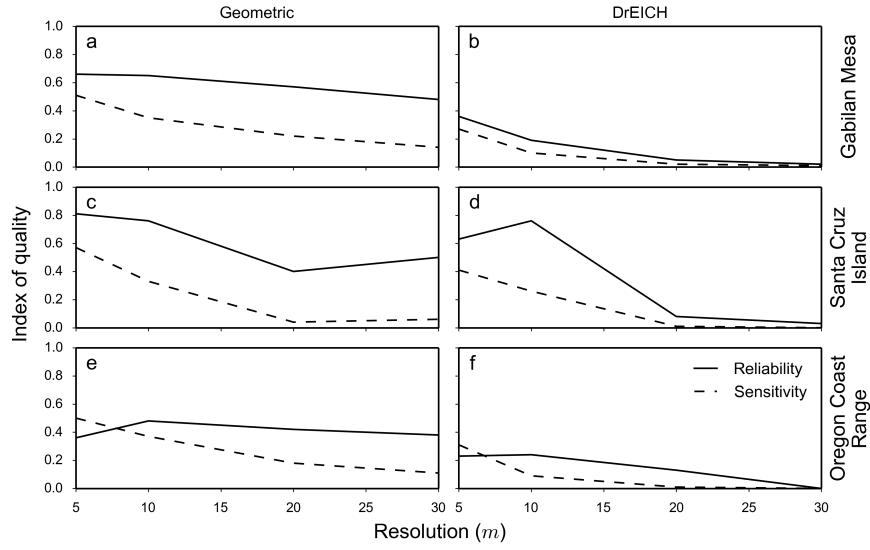


Figure 7. The variations in reliability (Equation 5) and sensitivity (Equation 6) of each channel network with decreasing grid resolution. Plots a, c and e are generated using the geometric method of channel extraction. Plots b, d and f are generated using the DrEICH method. The top row is from Gabilan Mesa, the middle row is from Santa Cruz Island and the bottom row is from the Oregon Coast Range. The full results from this analysis can be found in Tables (3) and (4).

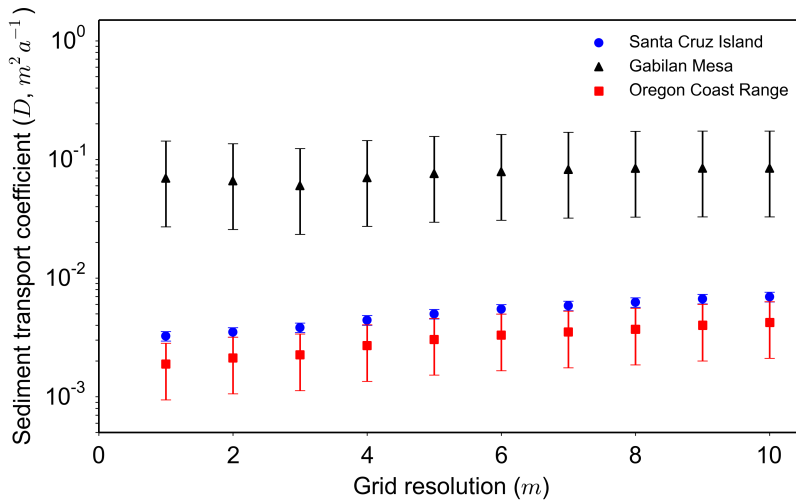


Figure 8. Changes in the estimated sediment transport coefficient, D , calculated using Equation (10) and parameters in Table (2) for each of the three study landscapes, with decreasing data resolution. The errorbars on each datapoint represent the uncertainties reported for each landscape's erosion rate data.

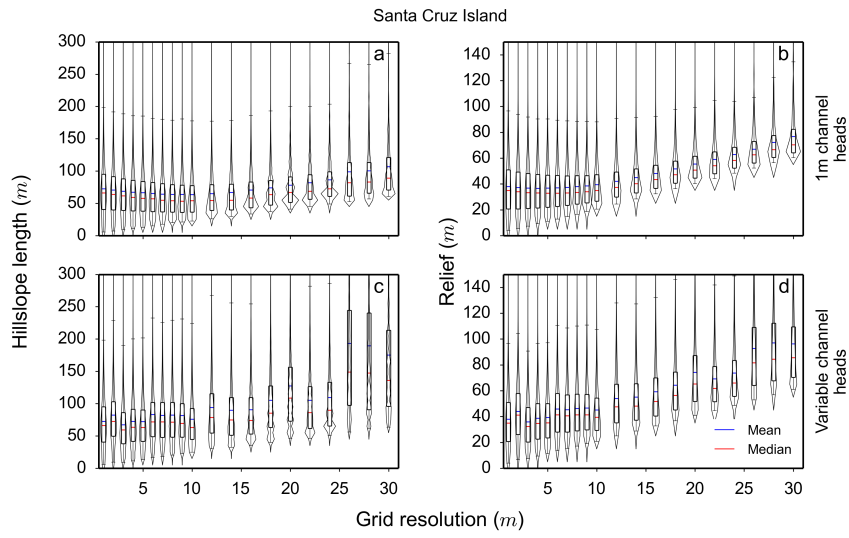


Figure 9. Plots of the distribution of hillslope length (a and c) and relief (b and d) measurements as resolution is decreased for Santa Cruz Island. Whiskers are the 2nd and 98th percentiles, the box covers the 25th and 75th percentiles, the blue bar is the mean and the red bar is the median. The gray outline is the probability density function of each dataset. The top row presents the best case scenario, where an independent constraint on the channel network is available for the lower resolution data and the bottom row uses the channel networks extracted using the geometric method outlined in Section 2.3 for each resolution step.

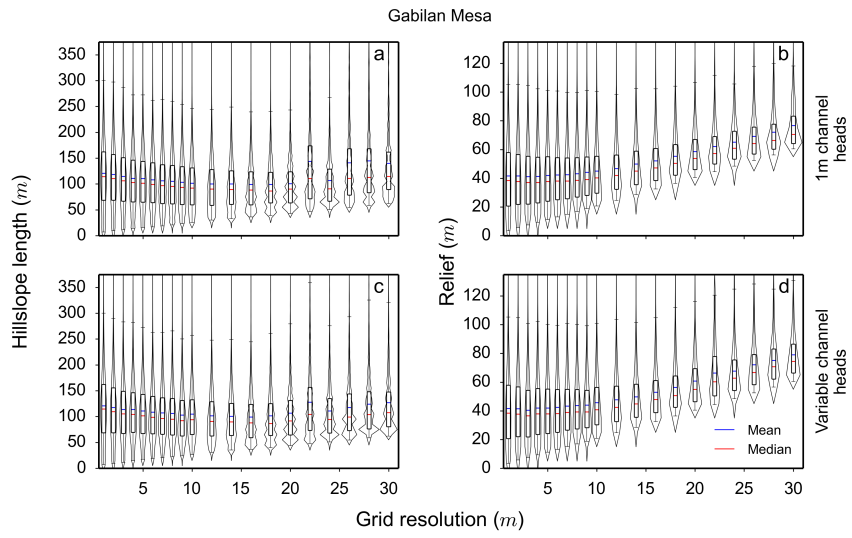


Figure 10. Plots of the distribution of hillslope length (a and c) and relief (b and d) measurements as resolution is decreased for Gabilan Mesa. Whiskers are the 2nd and 98th percentiles, the box covers the 25th and 75th percentiles, the blue bar is the mean and the red bar is the median. The gray outline is the probability density function of each dataset. The top row presents the best case scenario, where an independent constraint on the channel network is available for the lower resolution data and the bottom row uses the channel networks extracted using the geometric method outlined in Section 2.3 for each resolution step.

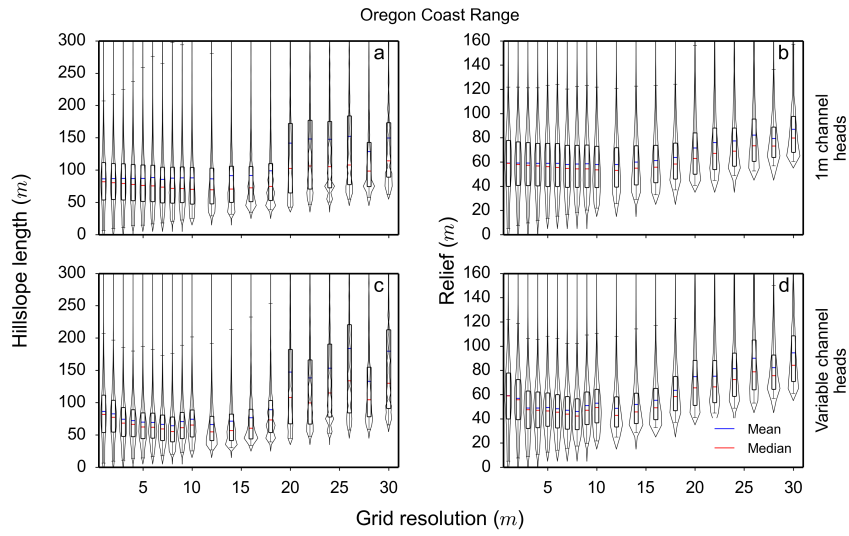


Figure 11. Plots of the distribution of hillslope length (a and c) and relief (b and d) measurements as resolution is decreased for the Oregon Coast Range. Whiskers are the 2nd and 98th percentiles, the box covers the 25th and 75th percentiles, the blue bar is the mean and the red bar is the median. The gray outline is the probability density function of each dataset. The top row presents the best case scenario, where an independent constraint on the channel network is available for the lower resolution data and the bottom row uses the channel networks extracted using the geometric method outlined in Section 2.3 for each resolution step. At higher resolution steps the 98th percentile data is not shown in the plot, to better highlight the distribution of measurements between the 25th and 75th percentiles, which make up the majority of the data points.

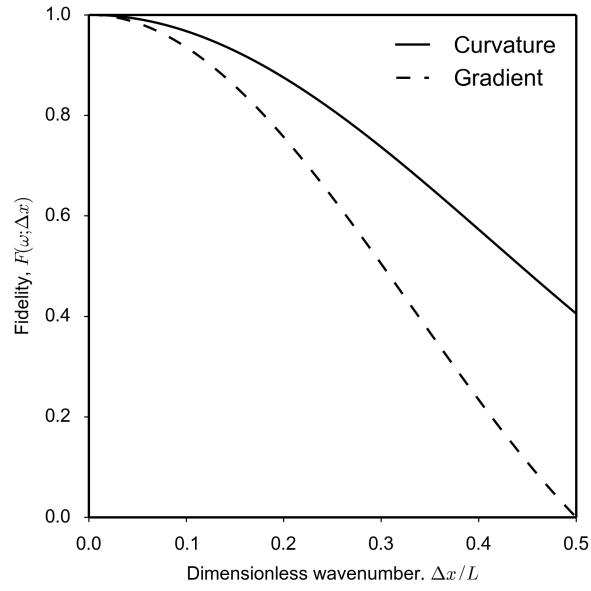


Figure 12. Plot of fidelity (F) of two one dimensional differencing operations: curvature (Equation 11) and topographic gradient (Equation 15) as a function dimensionless wavenumber $\Delta x/L$ to the Nyquist wavenumber, $\Delta x/L = 0.5$.

Table 1. LiDAR point cloud metadata.

Location	Point density (points per m^2)	Vertical accuracy (m)	Horizontal accuracy (m)
Santa Cruz Island	8.27	0.067 ^a	1.07 ^a
Gabilan Mesa	5.56	0.20 ± 0.15	0.11
Oregon Coast Range	6.55	0.07 ± 0.03	0.06

^a Accuracy is the 95% confidence level of the root mean squared error of measurements compared to static GPS control points.

Table 2. Published parameters used to calculate diffusivity.

Location	Soil density (kgm^{-3}) ^a	Rock density (kgm^{-3}) ^a	Erosion rate ($mmyr^{-1}$)	Reference
Santa Cruz Island	1.4	2.4	0.069 ± 0.007	Perroy et al. (2012)
Gabilan Mesa	1.4	2.4	0.36 ^{+0.38} _{-0.22}	Roering et al. (2007)
Oregon Coast Range	1.4	2.4	0.1 ± 0.05	Roering et al. (1999)

^a Soil and rock densities representative of typical measurements of the fieldsites and are taken from Hillel (1980)

Table 3. Reliability and sensitivity metrics for the DrEICH method of channel extraction.

Location	Resolution (m)	$\sum TP$	$\sum FP$	$\sum FN$	r	s
Gabilan Mesa	5	555	982	1489	0.36	0.27
	10	210	879	1875	0.19	0.1
	20	42	734	2088	0.05	0.02
	30	13	609	2122	0.02	0.01
Santa Cruz Island	5	3295	1971	4799	0.63	0.41
	10	2454	793	6865	0.76	0.26
	20	69	838	8235	0.08	0.01
	30	27	915	8284	0.03	0.0
Oregon Coast Range	5	507	1718	1131	0.23	0.31
	10	144	445	1462	0.24	0.09
	20	16	105	1623	0.13	0.01
	30	2	442	1639	0.0	0.0

Table 4. Reliability and sensitivity metrics for the geometric method of channel extraction.

Location	Resolution (m)	$\sum TP$	$\sum FP$	$\sum FN$	r	s
Gabilan Mesa	5	1019	519	987	0.66	0.51
	10	712	380	1301	0.65	0.35
	20	448	332	1592	0.57	0.22
	30	292	333	1775	0.48	0.14
Santa Cruz Island	5	4280	991	3109	0.81	0.57
	10	2473	777	4998	0.76	0.33
	20	334	505	7861	0.4	0.04
	30	475	470	7659	0.5	0.06
Oregon Coast Range	5	792	1438	788	0.36	0.5
	10	562	602	938	0.48	0.37
	20	276	374	1275	0.42	0.18
	30	475	277	1418	0.38	0.11