

Dear Dr. Pfeiffer and Dr. Pizzuto

We appreciate your thoughtful review of our article and your kind words about our work. We agree with all your suggestions. We believe that after addressing your suggestion the quality of our paper has significantly improved.

Dr. Pizzuto's comments (Referee #1)

General Comments: We divided your general comment in two parts (GC1 and GC2).

GC1: There are some interesting observations about the nature of bedload transport and previous transport equations that the authors could emphasize more strongly. This would raise the discussion from a more technical level about how the data were collected and analyzed to include new scientific knowledge that the author's results lead to. For example, it is perhaps not widely recognized that existing transport equations more or less require that the entire shear stress distribution in a reach be scaled by a single parameter, the mean that is estimated by the reach averaged depth-slope product. While this assumption may be true in certain cases, for example in straight reaches with few large roughness elements, it is unlikely to be true for complex reaches with variable planforms and roughness characteristics.

Reply:

The method we present based on a 2D flow modeling explicitly accounts for the variability in bed surface elevation and roughness characteristics. In our approach, the spatial variability of shear stress is included and even those low-frequency values (especially local high shear stress values) play a role in determining the estimated bed load transport rate. In the most classical methods, some information is lost in the averaging process, in particular the local high shear stress values. Although, local low values of shear stress are also not well captured by an average shear stress value they are not as relevant given their low contribution to the sediment transport rate. Based on your suggestion we started the discussion highlighting the assumptions of existing bed load equations that rely on a single shear stress value and the advantages of our approach (L 314–323).

GC2: It is also meaningful that the author's equation is parallel to, but "lower than", previous equations. This means that most bedload transport occurs in relatively small, localized areas of the bed where shear stresses are higher than average. While not a new or surprising result, it has rarely been convincingly demonstrated by analyzes from specific field sites, or encoded in a method for computing bedload transport. This is a really interesting and important point that can be derived from the author's results. I would encourage them to make more of it in the manuscript.

Reply:

Thanks for the suggestion. We included text reflecting on the implication of the consistently lower W_i^* of the propose equation (L 234–236). We also included a figure (Figure 8) that illustrates the spatial variability of sediment transport, which depends on local shear stress characteristics. The figure has maps of the predicted local bed load transport rate per unit width (q_b) for four flow fractions of bankfull discharge (0.29 – 1.00).

Specific comments:

1. Line 95, "cobble-gravel". Please cite a source for these terms. For most geologists, "gravel" refers to particles > 2 mm, which is obviously not intended here

Reply:

We included a reference to the work of Milhous, (1973) and a reference to figure 2, which includes the actual grain size distribution of our site (both surface and subsurface) (L 93).

2. Line 100. "riparian. . ." ZONE? Something missing in this sentence.

Reply:

Thanks for catching that typo. We added "area" (L 98).

3. *Figure 1. Please give lat-long for this reach so it can actually be found. A location map should allow readers to find the precise area*

Reply:

Thanks for the suggestion. The figure now includes the coordinates in the legend and an improved map for better orientation.

4. *Line 143 – “subsurface-based”. Can you provide some explanation for choosing the sub-surface based equation? This is inconvenient because the subsurface distribution is much harder to measure, and it is philosophically confusing because the subsurface is not directly accessed by the flow. Justification?*

Reply:

The motivation for using a subsurface-based equation is explained in the text (L 153–155). We chose this equation because it was developed from measurements collected in the same reach, it gives accurate estimates of bed load transport, and it is relatively simple to extend for our purposes. This subsurface formulation has fewer parameters (or degrees of freedom) than the surface-based option (Parker, 1990) and was relatively easy to adapt as a formulation that includes the complete shear stress distribution. In addition, we had previous experience using this equation with 2D shear stress (Segura & Pitlick, 2015). It is worth mentioning that we are currently exploring the use of the complete distributions of shear stress with a surface-based bed load transport equation. So far, the results are promising and we hope to submit a paper about this very soon. We believe there is value in showing these results as a *progression*, similar to Dr. Parker and colleagues: first the subsurface formulation (Parker et al., 1982; Parker & Klingeman, 1982) and then a surface-based equation (Parker, 1990).

5. *Line 189 – grouped, not “group”.*

Reply:

Thanks for catching that typo. We changed to “grouped” (L 189).

6. Line 193. Is the variable F_i defined for the subsurface or the load? The two are not the same. It must be the former, because the latter is not known until q_{ij} is computed. Please clarify.

Reply:

Thanks for the suggestion. We specified that it is for the subsurface grain size distribution (L 193).

7. Table 1, mean shear stress - how does these values compare to the depth slope product? It would be interesting, even reassuring, to know.

Reply:

We agree. It is an important metric and critical comparison. We included two extra columns into Table 1 to show the average water depth and the total shear stress calculated as the depth slope product. The reach-averaged shear stress calculated using the depth-slope product was consistently higher than the one estimated from the 2D modelling. In general, it provided values that are 126 to 52 % higher than the mean shear stress value derived from the numerical model. In the text we stated “The predicted $\langle \tau \rangle$ were 66 to 79 % smaller than the mean shear stress values calculated based on the depth-slope product (Table 1)” (L 2.3–204).

8. Figure 3. I would like to see a map of the spatial distribution of predicted shear stress in the channel, scaled by the depth-slope product, just to be sure that the model predictions appear reasonable. I understand that this may seem unnecessary, but it would help the reader to better understand the results obtained during an important step of the computations.

Reply:

We agree and appreciate your suggestion. We now include a figure (Figure 8) with the predicted local bed load transport rate per unit width (q_b) for different flow levels. As anticipated, most of the bed load occurs in a relatively small area of the bed. We do not include the maps for the predicted local shear stress because these are available in a previous publication (Katz et al., 2018).

9. Figure 4a: What trend would be obtained from the depth slope product and steady uniform 1-D flow? Do we actually need the 2-D model to make this correlation?

Reply:

Thank you for the suggestion. Given that the shear stress calculated with the depth-slope product is the most common method used to estimate reach-averaged shear stress it is very informative to make the comparison you suggested. We modified Table 1 and Figure 4a to include this information. The following short explanation was also included in Figure's 4 caption "Total shear stress from depth slope product has a similar trend than $\langle \tau \rangle$ but it is consistently higher. All our results are based on the 2D models and τ_t is shown here only for comparison purposes "

Regarding to the question: *Do we actually need the 2-D model to make this correlation?* If we use the depth-slope product we would only be able to estimate the reach-averaged shear stress (although a different reach-averaged value than the one obtained using 2D modelling). However, it would not be possible to estimate the parameters of the Gamma function (α and β) or the spatial distribution of shear stresses within a reach. The 2D model is required to obtain these parameters and the distribution of τ as function of discharge.

10. Figure 4b: should the right y axis label refer to the variable beta actually shown in the graph, rather than theta, which is not shown in the graph?

Reply:

Thanks for catching that typo. We edited the figure and now beta is in the right place.

11. Equation 14 – should the dependent variable be beta, rather than Q, which mysteriously appears on both sides of this equation?

Reply:

Thanks for catching that typo. We edited the figure and now beta is in the right place and consistent with Figure 4.

12.Line 260. Is a "complete shear stress distribution" the one that is predicted by the 2-D numerical model? Please be clear about this - it is an important detail.

Reply:

Thanks for the suggestion. Now it reads” ... applied over the complete shear stress distribution predicted by the 2D numerical model instead of our formulation” (L 256)

13. Line 264. “relatively strong” - Please let the reader decide if the agreement is "strong". Just describe the correlation using the statistics.

Reply:

Thanks for the suggestion. We wrote that paragraph again to reflect the suggestion (L 261–262). We also modified Table 2 to include the Nash-Sutcliffe efficiency index.

14. Line 274 – “database”. Please explicitly note in the text that these results are presented in Fig. 6.

Reply:

Thanks for the suggestion. We modified the text to accordingly (L 271-272).

15. Line 280. This is useful, but a better test would be to try to reproduce data from a completely different site (of course outside the scope of this investigation – just offered as an observation).

Reply:

We appreciate your observation. We are currently developing different approaches to estimate bed load transport rates and GSD based on the spatial distribution of shear stress. We believe that this variability must be explicitly included in the estimation of bed load. Part of our current efforts include extending the application of this method to other rivers. We pointed out the need to test this methodology in other systems at the end of the discussion (L 434–437)

Dr. Pfeiffer's comments (Referee #2)

General Comments: We divided your general comment in three parts (GC1, GC2, and GC3).

GC1: I would have assumed that local τ^ should be calculated using both the local shear stress AND the local grain size. Surface grain size varies substantially throughout a pool-riffle reach, and I might assume that subsurface grain size would as well. The authors should address this point in the text.*

Reply:

You raised an interesting issue. There are various motivations for assuming a reach-averaged grain size distribution in this study: a) measuring local grain size distributions (or sediment patches) in a given river is practically complicated for developing a method broadly applicable. This is especially true when trying to delineate submerged sediment patches.. We recognize that the variability in the surface grain size is important, in fact, some years ago, one the authors presented a scheme in which the spatial distribution of GSD (in terms of sediment patches) was explicitly included in sediment transport estimates (Monsalve et al., 2016). In that case, the local τ^* was calculated using the local shear stress and the local grain size. However, sediment patches are difficult to identify and characterize, mainly because their boundaries can change even during low flow variations (Unpublished data) b) although, the GSD over a reach varies spatially the reach-averaged GSD of a given reach is less sensitive to changes in discharge than the shear stress. In a different study Segura and Pitlick (2015) compared the variability of the shears stress distribution and the grain size distribution and found that the shear stress distributions varies much more than GSD; and c) two dimensional models are not able to incorporate the effects of fine scale variability in the surface grain size. Consider that the grid cell in two dimensional models is in the order of 20–50 cm. Therefore, even if a detailed grain size distribution were available, coupling them within a 2-dimensional approach is yet to be possible.

GC2: The authors don't address the fact that their approach has been applied to only one reach of river. Isn't it possible that another channel would be far less conducive to this approach? (e.g.

complicated channel geometry could prevent the use of the gamma distribution technique). I think this can be addressed by adding a few caveat sentences to the end of the paper.

Reply:

You raise an important point. We now acknowledge that further testing is required beyond the reach we study (L 434-437). There are very few systems with the kind of data required to test our approach we can currently working on extending this method to other locations. We are also extending the approach to include a surface-based equation.

GC3: The choice of a subsurface (rather than surface) relation seems odd, given the goal of calculating sediment transport for lower flows. Shouldn't a surface relation be inherently better at representing low flow transport? I agree that Parker 1990 is convoluted to implement, but this distinction between a surface and sub-surface relation should be more directly addressed.

Reply:

This is an important question also raised by reviewer No. 1. The motivation for using a sub-surface-based approach is because the formulation has fewer parameters (or degrees of freedom) and was relatively easy to adapt as a method that includes the complete shear stress distribution. In the original work of Parker and Klingeman (1982) it was shown that the subsurface-based approach provides accurate estimates of bed load transport. We added a paragraph explaining why we chose the subsurface approach (L 337-343).

We are currently exploring the implications of the shape of the distributions of shear stress, not only for sediment transport predictions but also from a geomorphological perspective. We are aiming to show our results as a *progression*, similar to Dr. Parker and colleagues: first the subsurface formulation (Parker et al., 1982; Parker & Klingeman, 1982) and then a surface-based equation (Parker, 1990). At this moment we are working in a new article that uses/modifies a surface bed load transport equation.

Specific comments:

1. Ln 45- I would replace “measuring” with “predicting”

Reply:

Thanks for noticing that error. Actually, what we wanted to say was: “Bed load modeling can be a convenient alternative to measuring bed load in the field”. It was edit and updated in the text (L 43)

2. Figure 3 – While not necessary, it would be nice to see the gamma distribution curves overlain on the histograms

Reply:

Thanks, this is a very good idea. We have edited Figure 3 and included the curves for all discharges.

3. Figures 4, 8, 9 – Remove boxes around individual sub-plots.

Reply:

Thanks, this is a very good idea. They have been removed.

References

- Katz, S. B., Segura, C., & Warren, D. R. (2018). The influence of channel bed disturbance on benthic Chlorophyll a: A high resolution perspective. *Geomorphology*, 305, 141–153. <https://doi.org/10.1016/j.geomorph.2017.11.010>
- Milhous, R. T. (1973). *Sediment transport in a gravel-bottomed stream - Ph.D. Thesis*. Department of Civil Engineering, Oregon State University.
- Monsalve, A. D., Yager, E. M., Turowski, J. M., & Rickenmann, D. (2016). A probabilistic formulation of bed load transport to include spatial variability of flow and surface grain size distributions. *Water Resources Research*, 52(5), 3579–3598. <https://doi.org/10.1002/2015WR017694>
- Parker, G. (1990). Surface-based bedload transport relation for gravel rivers. *Journal of Hydraulic Research*, 28(4), 417–436. <https://doi.org/10.1080/00221689009499058>
- Parker, G., & Klingeman, P. C. (1982). On why gravel bed streams are paved. *Water Resources Research*, 18(5), 1409. <https://doi.org/10.1029/WR018i005p01409>
- Parker, G., Klingeman, P. C., & McLean, D. G. (1982). Bedload and size distribution in paved gravel-bed streams. *Journal of the Hydraulics Division*, 108(4), 544–571.
- Segura, C., & Pitlick, J. (2015). Coupling fluvial-hydraulic models to predict gravel transport in spatially variable flows. *Journal of Geophysical Research: Earth Surface*, 120, 834–855. <https://doi.org/10.1002/2014JF003302>

A bed load transport equation based on the spatial distribution of shear stress - Oak Creek revisit

Angel Monsalve^{1,2}, Catalina Segura^{3,2}, Nicole Hucke¹, Scott Katz^{3,4}

¹ Departamento de Ingeniería de Obras Civiles, Universidad de la Frontera, Francisco Salazar 01145, Temuco, Chile.

² Center for Ecohydraulics Research, Department of Civil and Environmental Engineering, University of Idaho, Boise, ID, 83702

³ Forest Engineering, Resources, and Management, Oregon State University, 201 Peavy Hall, Corvallis, OR 97331, USA

⁴ Natural Systems Design, Bellingham WA. 98225

Correspondence to: Angel Monsalve (angel.monsalve@ufrontera.cl)

Abstract: Bed load transport formulations for gravel bed-rivers are often based on reach-averaged shear stress values. However, the complexity of the flow field in these systems results in wide distributions of shear stress, whose effects on bed load transport are not well captured by the frequently used bed load transport equations, leading to inaccurate estimates of sediment transport. Here, we modified a subsurface-based bed load transport equation to include the complete distributions of shear stress generated by a given flow within a reach. The equation was calibrated and verified using bed load data measured at Oak Creek, OR. The spatially variable flow field characterization was obtained using a two-dimensional flow model calibrated over a wide range of flows between 0.1 and 1.0 of bankfull discharge. The shape of the distributions of shear stress was remarkably similar across different discharge levels which allowed it to be parameterized in terms of discharge using a Gamma function. When discharge is high enough to mobilize the pavement layer (1.0 m³/s in Oak Creek), the proposed transport equation had a similar performance to the original formulation based on reach-averaged shear stress values. In addition, the proposed equation predicts bed load transport rates for lower flows when the pavement layer is still present because it accounts for bed load transport occurring in a small fraction of the channel bed that experience high values of shear stress. This is an improvement over the original equation, which fails to estimate this bed load flux by relying solely on reach-average shear stress values.

1 Introduction

Predicting bed load is both expensive and practically challenging, as data from a wide range of flows is required to develop robust relationships between discharge and load. In addition, characterizing bed load at high flow levels—that transport the majority of the sediment is often dangerous (Bunte et al., 2008). Samples collected using hand-held devices can be widely variable due to factors related to variations of their orifice size and the sampling time (Beschta, 1981; Emmett, 1980; Pitlick, 1988; Vericat et al., 2006). While advances in safe, accurate sediment sampling technology such as bed load traps (Bunte et al., 2008), radio tracers (Bradley and Tucker, 2012; May and Pryor, 2014; Olinde and Johnson, 2015; Schmidt and Ergenzinger, 1992), and acoustic impact methods (Rickenmann and McArdeell, 2007; Turowski and Rickenmann, 2011; Wyss et al., 2016a, 2016b, 2016c; Yager et al., 2012b) provide

possible alternatives to hand-held samplers, field efforts remain expensive and out of reach for many practical applications.

45 Bed load modeling can be a convenient ~~strategy alternative~~ to measuring bed load in the field. The development of empirical bed load relationships has progressed significantly over the past three decades such that many formulations allow for the estimation of bed load based on hydraulic and grain size information. In general sediment transport equations are based on reach-averaged one-dimensional shear stress estimates and the surface (e.g., Barry et al., 2004; Parker, 1990; Recking, 2013; Wilcock and Crowe, 2003) or subsurface (Parker et al., 1982; Parker and Klingeman, 50 1982) grain size information.

Many of these sediment transport equations (e.g., Parker et al., 1982; Parker and Klingeman, 1982) were developed based on data from Oak Creek, ~~OR~~, a steep, coarse, gravel-bed stream in the Oregon Coast Range (Milhous, 1973). The Oak Creek dataset was collected using a vortex sampler between 1969–1990; data from 1971 was published in 55 the thesis work of Milhous (1973). The dataset is unique because the vortex sampling method enabled to capture the entire bed load flux of sand–cobble size particles for a wide range of flows over long time periods, reducing the error associated with hand-held samplers (Parker et al., 1982). Although it has been reported that the efficiency of the vortex sampler decreased for smaller grain sizes (Milhous, 1973; O’leary and Beschta, 1981), the Oak Creek dataset remains one of the most comprehensive to date. The Oak Creek based transport equations were developed by collapsing the 60 relations between reference conditions for the motion of different grain sizes into single functions (i.e., a similarity collapse) (Einstein, 1950; Parker, 1990; Parker et al., 1982; Parker and Klingeman, 1982). Both Parker and Klingeman (1982) and Parker et al. (1982) limited their analysis to flows during which the surface channel layer was mobilized (“pavement” was broken) to develop their transport functions. Parker et al., (1982) computes total bed load (Q_b) based on a single grain size (the median – D_{50}) whereas Parker and Klingeman (1982) expands that relationship to the entire 65 grain size distribution (GSD). This is accomplished by introducing a hiding function that accounts for differences in the [hiding and](#) exposure of particles to the flow in mixed-sized beds. Additionally, Parker and Klingeman (1982) incorporated a low flow transport relation to estimate the GSD of Q_b at a full range of flows. Later, Parker (1990) modified Parker and Klingeman (1982) equations to be based in the surface grain size distribution.

70 Although the transport relations of Parker et al. (1982) and Parker and Klingeman (1982) have been successfully applied to many rivers, the work of Recking (2013b) [highlighteds](#) the variability that can be incorporated into Q_b estimates due to uncertainty in input shear stress (τ) values. The high spatial variability in τ throughout a river reach has been well documented (Clayton and Pitlick, 2007; Katz et al., 2018; Lisle et al., 2000; May et al., 2009; McDonald et al., 2010; Monsalve et al., 2016; Recking, 2013a; Segura and Pitlick, 2015; Yager et al., 2018). However, most 75 transport functions, including Parker and Klingeman (1982) and Parker et al., (1982), utilized reach-averaged estimates of τ in their calculations and are highly sensitive to uncertainties in these values due to the non-linear exponents on each function (Recking, 2013a). Significant differences in bed load estimates computed using τ from one- (1D) and two-dimensional (2D) approximations have been found because of the spatial variability of τ (Ferguson,

2003; Gomez and Church, 1989; Recking, 2013a). Thus, the simplification of τ to a 1D variable may not capture
80 spatial changes in bed load associated with localized values of high τ (Segura and Pitlick, 2015).

The objective of this study is to develop a bed load transport equation based on the subsurface GSD that uses the
complete shear stress distribution for different discharge levels within a specific reach. This new approach is developed
using field measurements of bed load transport rates and GSD, river topography, and 2D flow modeling. The
85 performance of the new equation is then tested using the historic Oak Creek dataset (Milhous, 1973). Specific
objectives of our study are to:

- i) Analyze the characteristics of shear stress distributions over a wide range of discharge levels;
- ii) Generate synthetic shear stress distributions based solely on discharge;
- iii) Modify a reach-averaged subsurface based equation (Parker and Klingeman, 1982) developed for
90 Oak Creek to use [complete](#) shear stress distributions;
- iv) Test the performance of the proposed equation for a wide range of discharge level.

2 Methods

2.1 Study area

95 This study was conducted in Oak Creek, a cobble-gravel stream located in the Oregon Coast Range ([Milhous, 1973,](#)
[figures 1 and 2](#)[Figure 4](#)). The catchment drains 7 km² of forest land underlain by basaltic lithology (Milhous, 1973;
O'Connor et al., 2014). The climate is Mediterranean with wet winters and cool/mild summers. Elevations within the
Oak Creek watershed range from 143 to 664 m (Paustian and Beschta, 1979). The basin is located in the McDonald-
Dunn Forest, which is owned and managed by the College of Forestry at Oregon State University and dominated by
100 Douglas fir (*Pseudotsuga menziesii*) and Oregon White oak (*Quercu sp*). In the riparian [area](#), vegetation is dominated
by Alder (*Alnus sp*), Black Cottonwood (*Papulus trichocarpa*), and Big Leaf Maple (*Acer macrophyllus*) with lower
densities of Douglas fir and White oak. The 150-m study reach has a pool-riffle sequence in the upstream end and a
relatively straight section in the downstream section (Katz et al., 2018) and is located directly upstream from a historic
sediment transport sampling facility where bed load samples were collected between 1969 and 1973 (Milhous, 1973).

105 The site has a [square-rectangular](#) cement weir in which a stage-discharge (Q) relationship has been developed (Katz
et al, 2018). The stream has a slope (S_b) of 0.014 m/m and bankfull dimensions of 6 m in width and 0.46 m in depth.
Recent field observations indicate that bankfull discharge (Q_{bf}) is 3.4 m³/s (Katz et al, 2018), which is similar to the
bankfull discharge reported almost 40 years ago by Milhous (1973). The stream bed is armored with coarser surface
overlying a finer subsurface. The surface D_{50} is 45 mm while the subsurface D_{50s} is 21 mm (Katz et al., 2018) ([figure](#)
110 [2](#)).


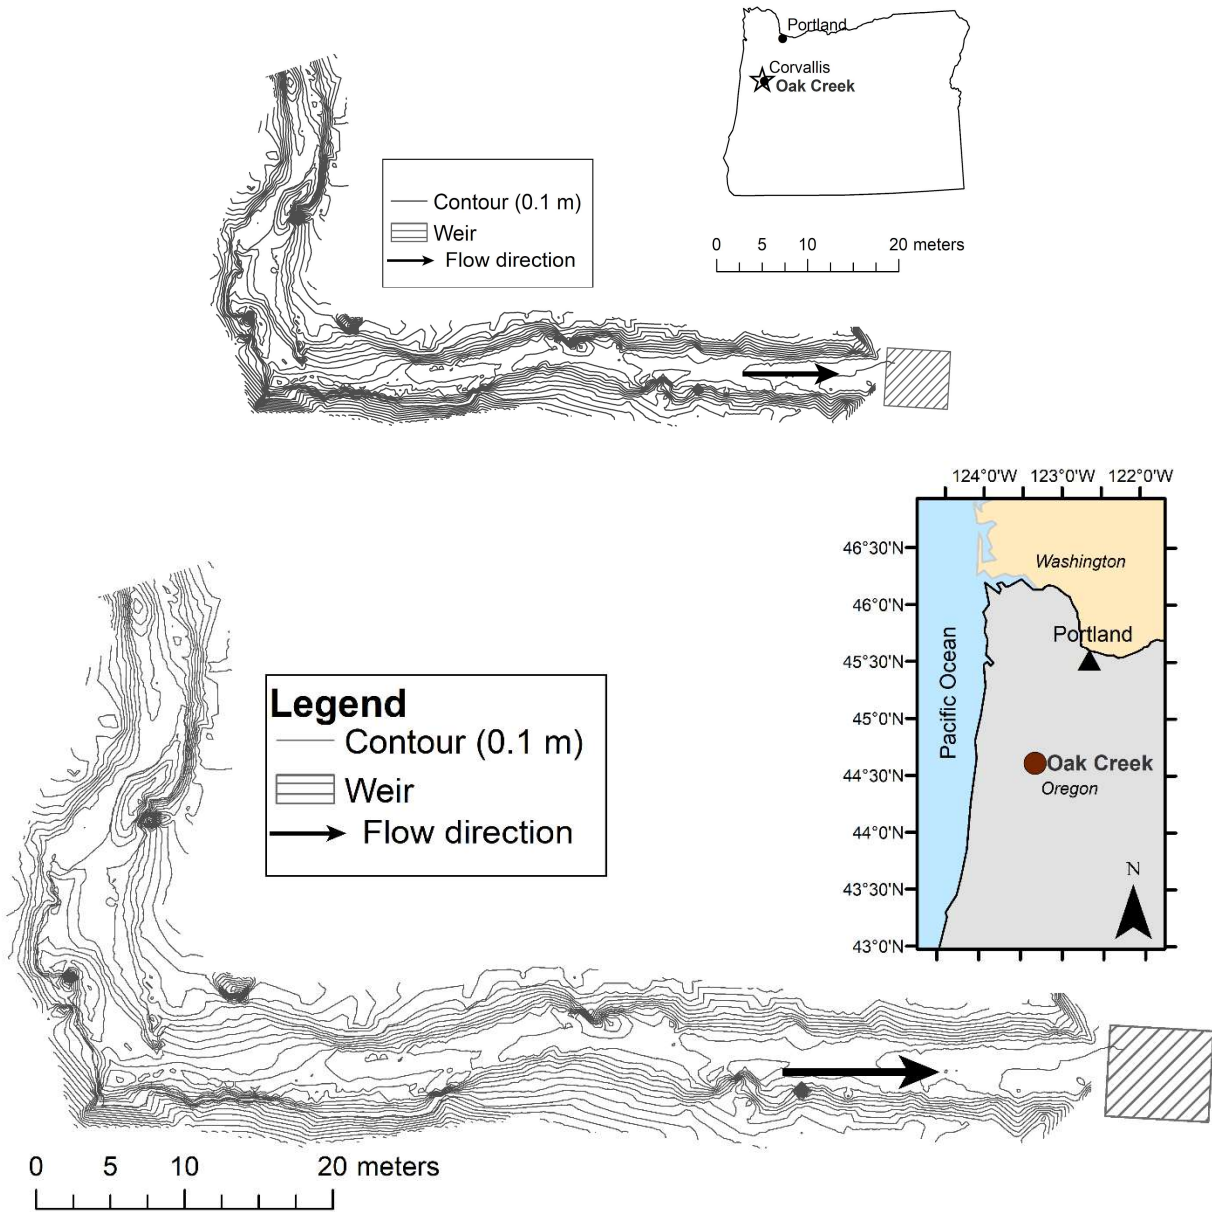


Figure 1: Location of the study reach in Oak Creek, OR ($44^{\circ} 23' 19.092''$ N, $123^{\circ} 19' 51.312'$ W). Contours every 0.1 meters are indicated.

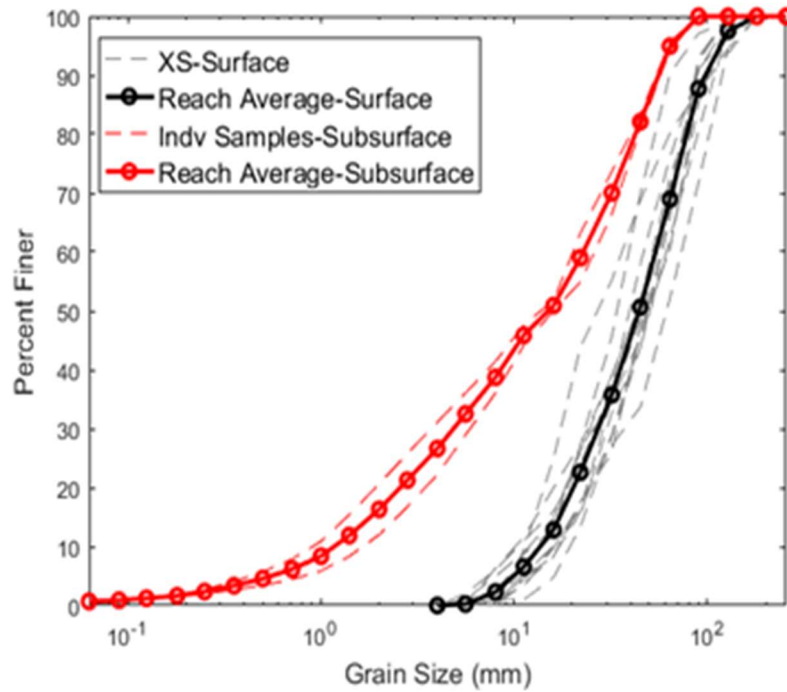

115

Figure 2: Surface and subsurface grain size distribution (GSD). The average surface GSD is based on 23 cross-sections (XS) and average subsurface GSD based on 2 samples of the substrate collected from exposed bars.

2.2 Two-dimensional modeling

Spatial distributions of the flow field, in particular local shear stresses, were estimated for seven discharges (0.4 to 3.4 m³/s, equivalent to 0.12 Q_{bf} to Q_{bf}) using the Flow and Sediment Transport with Morphological Evolution of Channels (FaSTMECH) two-dimensional flow solver (McDonald et al., 2010). Specific details of the modeling effort can be found in Katz et al. (2018). The model has also been described and used in several studies (e.g., Clayton and Pitlick, 2007; Conner and Tonina, 2014; Kinzel et al., 2009; Lisle et al., 2000; Maturana et al., 2014; McDonald et al., 2005; Monsalve et al., 2016; Mueller and Pitlick, 2014; Nelson and McDonald, 1995; Nelson and Smith, 1989; Nelson et al., 2010; Segura and Pitlick, 2015), therefore, only the most relevant characteristics of it are described here. The model uses a finite difference solution to the vertically integrated conservation of mass and momentum equations (Nelson et al., 2003a) with calculations performed in an orthogonal curvilinear grid that follows the surveyed planform topography of the channel (Nelson and Smith, 1989). Roughness is included using a unitless drag coefficient (C_d). A zero-equation model for the lateral eddy viscosity (LEV) that assumes homogeneous and isotropic turbulence is used for turbulence closure (Barton et al., 2005; Miller and Cluer, 1998; Nelson et al., 2003b). For our models C_d ranged from 0.017 to 0.04 and LEV ranged 0.0010 to 0.0032 (Katz et al., 2018). The calibration indicated strong model fits in terms of water surface elevation with root mean square errors (RMSE) between 0.025 and 0.048 m and $R^2 > 0.99$ (Katz et al., 2018).

135 The local shear stress (τ_{xy}) was calculated at every grid node in the model domain as a function of C_d , the vertically averaged streamwise (u) and cross-stream (v) velocities, and water density (ρ), assumed as 1,000 kg/m³.

$$\tau_{xy} = \rho C_d (u_{xy}^2 + v_{xy}^2) \quad (\text{Eq. 1})$$

where the subscripts x and y correspond to the stream-wise and cross-stream directions.

2.3 Shear stress distribution analysis

Characteristics of the distributions of predicted τ_{xy} were analyzed as a function of discharge. We produced histograms of the mean-normalized shear stress distribution ($\tau/\langle\tau\rangle$) (subscripts x and y were dropped for simplicity) to compare patterns between flows. For each flow level we fitted the frequency distributions of $\tau/\langle\tau\rangle$ to a two-parameter Gamma function (Nicholas, 2000; Paola, 1996; Pitlick et al., 2012; Recking, 2013a; Segura and Pitlick, 2015):

$$f(\tau) = \frac{\alpha^\alpha (\tau/\langle\tau\rangle)^{\alpha-1} e^{-\alpha(\tau/\langle\tau\rangle)}}{\langle\tau\rangle \Gamma(\alpha)} \quad (\text{Eq. 2})$$

where Γ is the standard Gamma function, α is the shape parameter and $\beta = \langle\tau\rangle/\alpha$ is the scale parameter. The parameters of the [Gamma](#) function that best fitted the distributions were found using the maximum likelihood estimation (MLE) method (Bevington and Robinson, 2003). We assessed the goodness of fit of the [gamma-Gamma](#) function in each flow event by computing the [root mean square error \(RMSE\)](#) and the reduced chi-square (χ_v^2), defined as chi-square (χ^2) divided by the number of degrees of freedom, according to:

$$\chi^2 = \sum \frac{[f_k - f(x_k)]^2}{\sigma_k^2} \quad (\text{Eq. 3})$$

where f_k and $f(x_k)$ are observed and predicted mean-normalized shear stress frequencies in a given bin interval, k . The uncertainty associated with the observed frequencies, σ_k^2 , was estimated as the square of the number of observations in each bin (Bevington and Robinson, 2003; Press et al., 2007). Initially, in all cases, we specified the bin width using the Freedman–Diaconis rule (Freedman and Diaconis, 1981). To improve statistics when the number of τ values in a given bin was less than five we joined two consecutive bins until all bins had five or more τ values. Typically, for the used goodness of fit indicators, an excellent fit is $\chi_v^2 \leq 1$ and RMSE of zero (Bevington and Robinson, 2003; Press et al., 2007).

2.4 Sediment transport equations

The original subsurface-based sediment transport equation of Parker and Klingeman (1982) was modified to explicitly consider the spatial distribution of shear stress. This equation was chosen because it was developed from measurements collected in the same reach as this study, it gives accurate estimates of bed load transport, and it is relatively simple to extend for our purposes (see below). The modified version of the Parker and Klingeman (1982) equation was formulated such that it accounts for the bed load transported by each increment of shear stress, which means that it considered the range of local contributions of τ across the channel bed. By doing so, all τ values, even those less-frequent high-magnitude shear stresses, are explicitly included in the calculations. To obtain the new equation the parameters of the Einstein bed load function (G) proposed by Parker (1978) were relaxed and fitted as new parameters. The parameter values were optimized based on the fit of volumetric transport rate per unit width of channel (q) and the bed load GSD. Like the original equation, we only consider discharges of approximately $1 \text{ m}^3/\text{s}$ or higher to calibrate the new equations (for calibration purposes, our lower discharge was $0.99 \text{ m}^3/\text{s}$). The fitting

procedure of the parameters minimized the absolute error between predicted and measured q and maximized the Nash-Sutcliffe efficiency index (Nash and Sutcliffe, 1970) using the calculated and observed bed load GSD. Equal importance (equal weight) was given to the fit of q and to the fit of the bed load GSD.

170

The new equation was based on the locally dimensionless shear stress (τ^*):

$$\tau^* = \frac{\tau}{(\rho_s - \rho)gD} \quad (\text{Eq. 4})$$

where ρ_s is the sediment density, g is the acceleration due to gravity, and D the grain size. Notice that for a given flow discharge τ^* has a distribution of values depending on the local τ (previously defined as τ_{xy}) and variations in the fraction of the GSD. The original transport relation of Parker and Klingeman (1982) ~~(equation 5)-(Eq. 5)~~ is valid for

175

$$G = \frac{W^*}{W_r^*} = 5.6 \cdot 10^{-3} \left(1 - \frac{0.853}{\phi}\right)^{4.5} \quad (\text{Eq. 5})$$

where the subscript r denotes a reference value associated with a small but measurable transport rate. Transport stage (ϕ) is defined as:

$$\phi = \tau^* / \tau_r^* \quad (\text{Eq. 6})$$

180

The dimensionless transport rate, W^* ~~(equation 5)-(Eq. 5)~~ is defined as:

$$W^* = \frac{(s-1)gq}{(\tau/\rho)^{1.5}} \quad (\text{Eq. 7})$$

where s is the specific gravity of sediment ($s = \rho_s/\rho$)

We extended ~~equation 5-(Eq. 5)~~ to include all grain size fractions in the subsurface GSD (D_i , subscript i denotes the size range) and $\phi_i > 0.95$. In the most general form the equation for the dimensionless transport rate is $W_i^* =$

185

0.0025 G'_i , where the constant is the reference transport rate of Parker and Klingeman (1982) ($W_r^* = 0.0025$) and G'_i is the new (modified) transport relation. The proposed relation is a two-part equation applicable to sediment mixtures:

$$\begin{aligned} W_i^* &= 0.0025 \cdot 10^{-3} \exp(26.6(\phi_i - 1) - 19.53(\phi_i - 1)^2) & , \text{ for } & 0.95 < \phi_i < 1.65 \\ W_i^* &= 0.57 \left(1 - \frac{0.853}{\phi_i}\right)^{4.5} & , \text{ for } & \phi_i \geq 1.65 \end{aligned} \quad (\text{Eq. 8})$$

To account for the mobility of individual grain sizes we used the Parker and Klingeman (1982) hiding function:

$$\frac{\tau_{ri}^*}{\tau_{r50}^*} = \left(\frac{D_i}{D_{50}}\right)^{-0.982} \quad (\text{Eq. 9})$$

where $\tau_{r50}^* = 0.0876$ is the reference Shields stress for the median grain size of the subsurface Parker and Klingeman (1982) obtained for the same reach. The transport stage ~~(equation 6)~~, valid for any grain size D_i and for the entire distribution of shear stress values (i.e., every τ_i^*), was re-written as:

190

$$\phi_i = \tau_i^* / \tau_{ri}^* \quad (\text{Eq. 10})$$

To obtain the volumetric transport rate the predicted shear stresses were grouped in a series of intervals (τ_j , subscript j denotes an interval of τ values) with a regular shear stress increment ($\Delta\tau_j = 0.25 \text{ N/m}^2$). For all discharges, τ_j was defined such that it ranges from zero to the maximum predicted shear stress value. For a given D_i and τ_j the volumetric transport rate per unit width (q_{ij}) is:

$$q_{ij} = \frac{\left(\frac{\tau_j}{\rho}\right)^{1.5} F_i W_{ij}}{(s-1)g} f_{\tau_j} \quad (\text{Eq. 11})$$

where F_i is the volume fraction of the i^{th} grain-size class in the subsurface GSD, W_{ij} is calculated using equation 8 (Eq. 8 for each τ_j and f_{τ_j} is the fraction of the bed area where a certain τ_j acts. The width-integrated volumetric transport rate for a given flow event is:

$$q_b = b \sum_i \sum_j q_{ij} \quad (\text{Eq. 12})$$

with b being the width of the gravel bed. In all bed load estimations sand grains likely to move in suspension were excluded, thus the subsurface GSD was truncated at 2 mm.

3 Results

3.1 Spatial distributions of shear stress

The numerical models allowed the characterization of the spatial distribution of τ for each discharge level (figure 3). In terms of reach-averaged values, the predicted $\langle\tau\rangle$ varied between 18.3 and 51.1 N/m^2 for flows between 0.12 and 1.0 Q_{bf} (Table 1). Furthermore, the mean shear stress, $\langle\tau\rangle$, scaled with discharge such that an exponential function explained 97% of its variance (figure 4 a)-(a). The predicted $\langle\tau\rangle$ were 66 to 79 % smaller than the mean shear stress values calculated based on the depth-slope product (Table 1).

210

215

Table 1: Summary of model shear stress distributions including reach-averaged shear stress ($\langle\tau\rangle$), mean modeled water depth (h), and total shear stress ($\tau_t = \rho gh S_b$), measured bed load transport rate ($q_{b, meas}$) (Milhous, 1973), Gamma fit parameters (α and β), and goodness of fit: reduced chi-square (χ_v^2) and root mean square error (RMSE) between the observed distribution of shear stress and the gamma fit predicted distribution.

Q (m^3/s)	$\langle\tau\rangle$ (N/m^2)	h (m)	τ_t (N/m^2) ^a	$q_{b, meas}$ (kg/s)	α	β	χ_v^2	RMSE
0.40	18.34	0.18	24.72	$1.17 \cdot 10^{-5}$	7.49	0.133	0.151	0.05

0.64	23.10	<u>0.22</u>	<u>30.32</u>	$3.65 \cdot 10^{-4}$	6.46	0.155	0.102	0.03
0.99	24.64	<u>0.25</u>	<u>34.73</u>	$3.01 \cdot 10^{-3}$	5.95	0.168	0.074	0.03
1.33	25.60	<u>0.28</u>	<u>38.32</u>	$1.51 \cdot 10^{-2}$	5.64	0.177	0.055	0.03
1.46	26.16	<u>0.29</u>	<u>39.74</u>	$2.00 \cdot 10^{-2}$	5.55	0.180	0.043	0.03
1.91	32.76	<u>0.34</u>	<u>46.52</u>	$2.8 \cdot 10^{-2}$	4.82	0.207	0.070	0.03
3.40	51.12	<u>0.47</u>	<u>64.40</u>	$3.78 \cdot 10^{-1}$	3.69	0.271	1.026	0.07
a: We estimated the total shear stress (τ_t) assuming uniform flow (depth-slope product) and a constant energy slope of 0.014 m/m.								

225 The shape of the distributions of $\tau/\langle\tau\rangle$ was remarkably similar across all modeled discharges (figure 3). In all cases the highest frequencies of local τ were around the mean value and approximately 92% of the predicted $\tau/\langle\tau\rangle$ were below 2. We fitted the normalized shear stress distributions to Gamma functions with α parameters that varied between 7.49 and 3.60 and β parameters that varied between 0.13 to 0.27 (Table 1). These parameters, α and β , varied linearly with discharge (figure 4 b). In both cases discharge explained more than 92% of the variability in α and β .

230


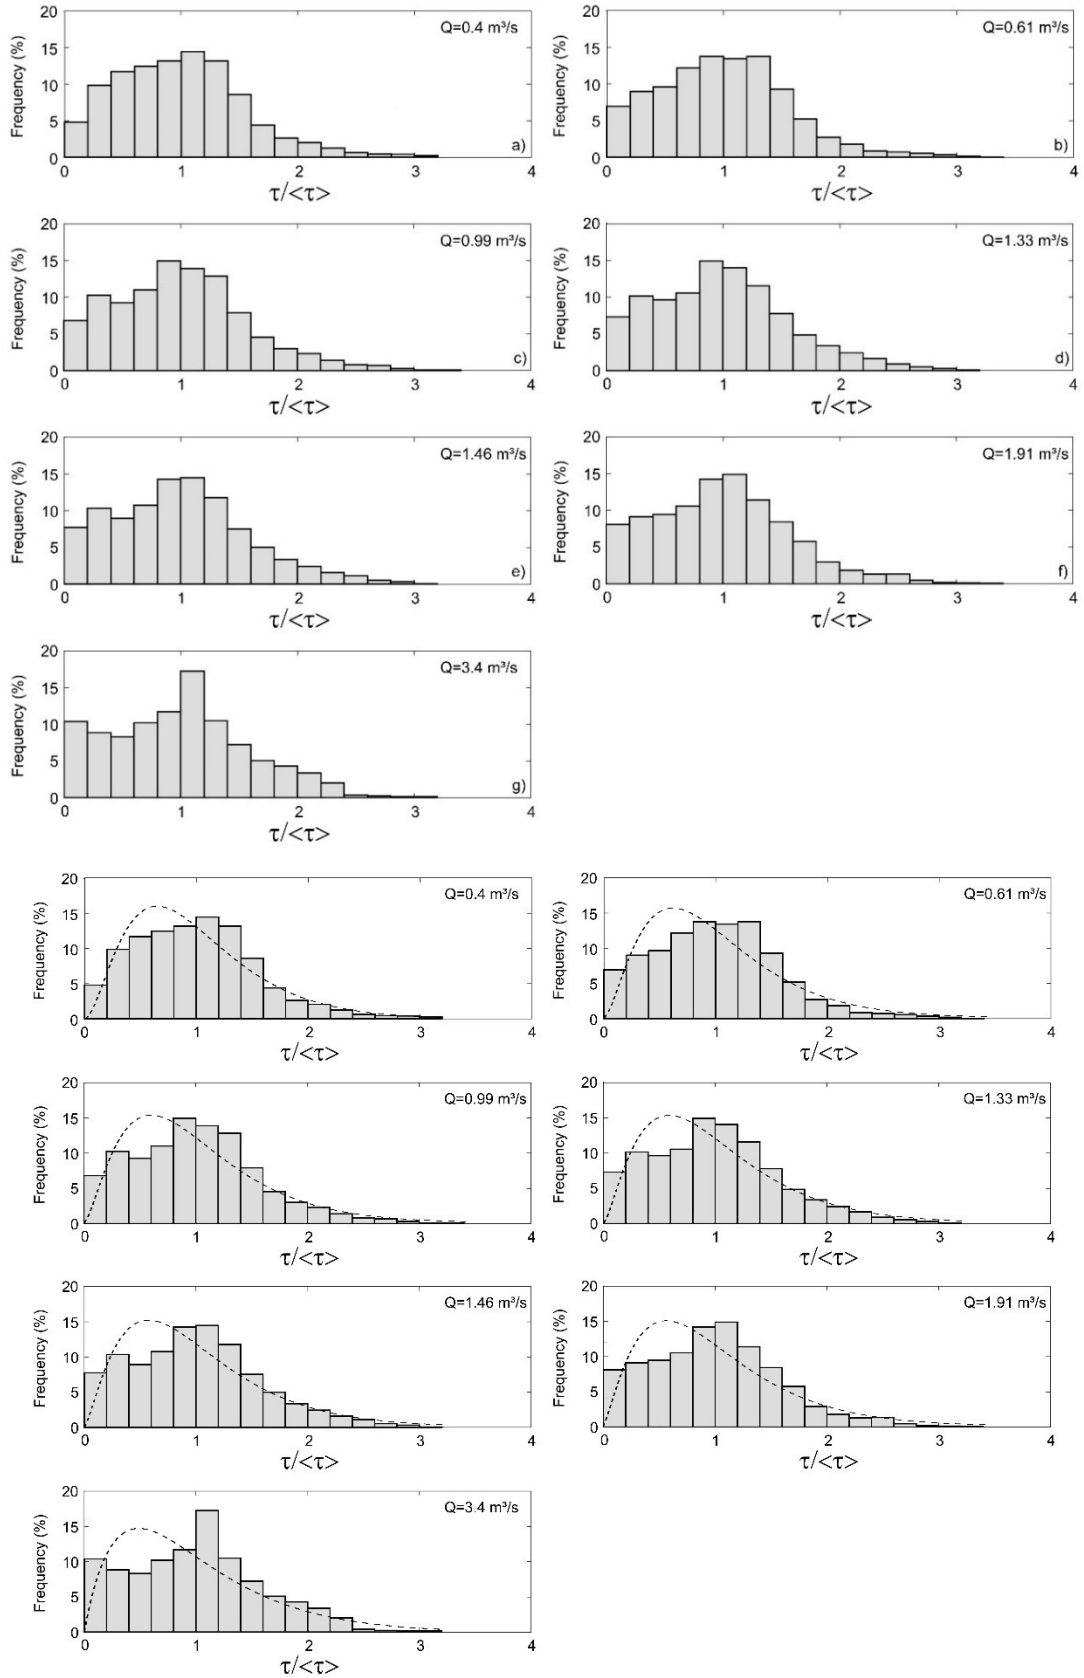


Figure 3: Frequency distributions of mean-normalized shear stress ($\tau/\langle\tau\rangle$) for the seven discharge levels. [Fitted Gamma distribution curves are shown as dashed lines](#). Discharges values are indicated in the upper right corner of each panel.

235

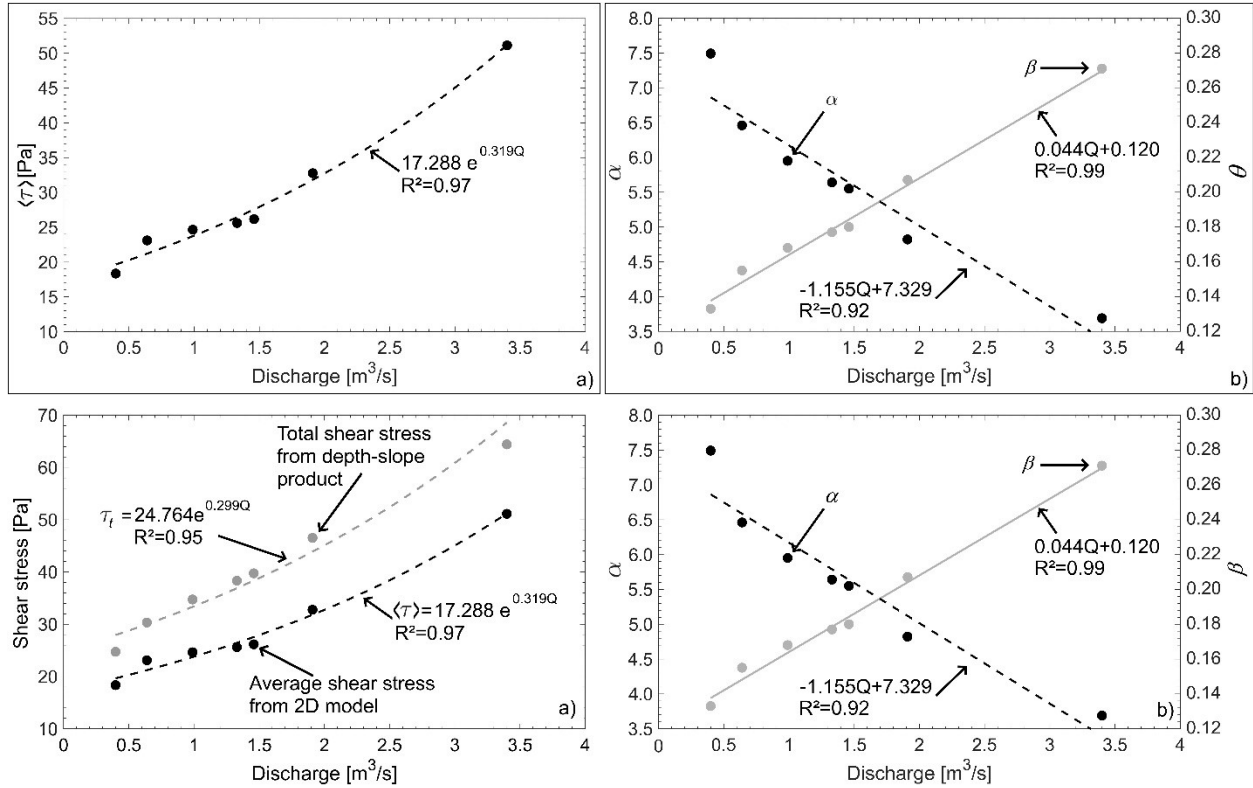

240

Figure 4: (a) Relationship between the reach-averaged shear stress ($\langle\tau\rangle$), [1D total shear stress \(\$\tau_t\$ \)](#)-and discharge (Q). (b) Relationship between the parameters of the Gamma function (α and β) and discharge. [Total shear stress from depth slope product has a similar trend than \$\langle\tau\rangle\$ but it is consistently higher. All our results are based on the 2D models and \$\tau_t\$ is shown here only for comparison purposes.](#)

The equations that relate the Gamma fit parameters and the reach-averaged shear stress to the discharge are:

$$\alpha = -1.155Q + 7.329 \quad (\text{Eq. 13})$$

$$\beta Q = 0.044Q + 0.120 \quad (\text{Eq. 14})$$

$$\langle\tau\rangle = 17.288e^{0.319Q} \quad (\text{Eq. 15})$$

245

Combining equations [equation 13 and 15 \(Eq. 13\) to \(Eq. 15\)](#) with equation 2, an expression to estimate the distribution of τ for any given Q can be obtained. Additionally, these synthetic distributions can be used to evaluate the accuracy of our bed load transport equation for discharge levels different than those used for its calibration (see section 3.3).

3.2 Characteristics of our sediment transport relation

250

The proposed sediment transport equation has the same shape as the Parker and Klingeman (1982) relation, but it is scaled such that W_i^* is consistently lower for all ϕ_i values ([figure 5](#)) ([Figure-5](#)). [The consistently lower \$W_i^*\$ indicates that bed load transport occurs are relatively small localized areas of the bed where stress stresses are higher than the](#)

average value. While calibrating this formulation we kept some key features of the original equation in Parker and Klingeman (1982), thus, we reduced the number of degrees of freedom. Specifically, the shape of both equations is the same and are valid within the same ϕ_i intervals. We used an exponential function with a second-degree polynomial function as argument for $0.95 < \phi_i < 1.65$ and a power function with an exponent equal to 4.5 for $\phi_i \geq 1.65$. We also maintained $\tau_{r50}^* = 0.0876$ and the exponent of the hiding function (0.982) as fixed values (i.e., were not adjusted while calibrating our equations).

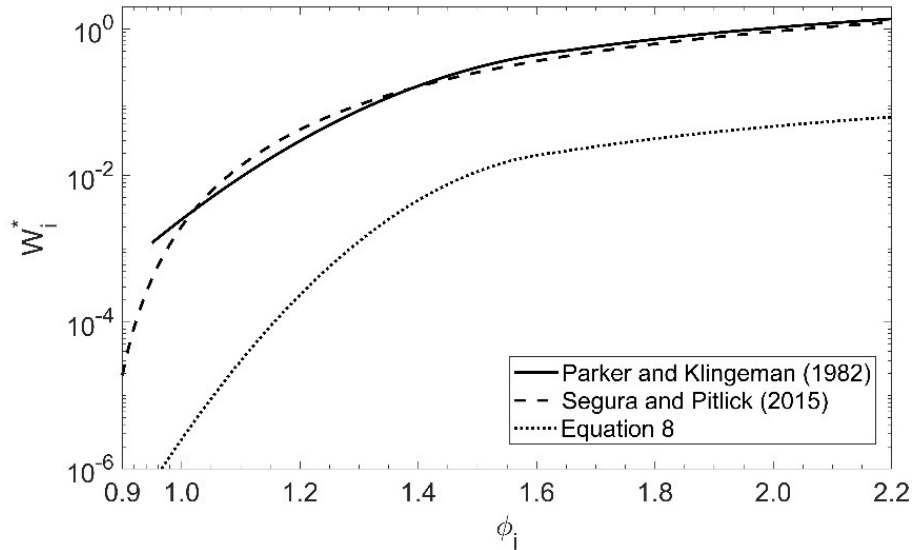


Figure 5: Comparison between different subsurface-based sediment transport equations and the one proposed in this study. The relation of Segura and Pitlick (2015), which is also a modified version of Parker and Klingeman (1982), is shown as reference.


3.3 Sediment transport calculations

All flow events used for calibrating had an error of less than an order of magnitude between the measured and predicted bed load transport rate (figure 6, table 2) (-). In terms of sediment transport estimates this order of error is generally considered as a relatively strong estimation (Yager et al., 2007, 2012b). Similarly to the Parker and Klingeman (1982) equation, our bed load estimates for flows lower than $0.4 \text{ m}^3/\text{s}$ were weaker. This is not surprising given that these low flows were not used for calibration and that there are very low rates of transport at such low discharges ($\sim 10\%$ of Q_{bf}). The equation of Parker and Klingeman (1982) was not designed to include distributions of τ . However, to have a point of comparison we contrasted the measured and predicted bed load rates for the original Parker and Klingeman (1982) equation applied over the complete shear stress distribution predicted by the 2D numerical model instead of our formulation. While our estimated bed load rates for $Q \geq 0.99 \text{ m}^3/\text{s}$ were within one order of magnitude of the observed value, those predicted using the Parker et al. (1982) equation were consistently over estimated by over an order of magnitude in all cases (figure 6) (Figure 6).

In terms of prediction of the bed load GSD, the Nash-Sutcliffe efficiency index was in all cases greater than 0.65. (Table 2). For $Q \geq 1.33 \text{ m}^3/\text{s}$ the efficiency index was greater or equal to 0.85 (Table 2). A relatively strong agreement

280 ~~was found between modeled and observed bed load GSD for $Q \geq 1.33 \text{ m}^3/\text{s}$.~~ The difference between predicted and observed bed load median grain sizes ($D_{50_{meas}} - D_{50_{pred}}$) was lower than 10 mm in all these cases. For the $Q = 0.99 \text{ m}^3/\text{s}$ event the error in the median grain size was larger (12.3 mm) with predicted grain size values consistently coarser (figure 7).-~~⊖~~.

285 Equation 8 (Eq. 8) is only applicable when the spatial distribution of τ is known. However, this is not the case in most studies and practical applications. In our case, given the strong correlations between discharge and reach-averaged shear stress and also between discharge and the Gamma function parameters, combining equations 13 and 15 (Eq. 13) to (Eq. 15) with equation 2 (Eq. 2) allowed us to generate synthetic distributions of τ for a given flow of interest. We tested the accuracy of our equation when these synthetic distributions were used as input using a subset of the Milhous (1973) database (grey circles in figure 6). The scenarios considered correspond to the same 22 flow events used by Parker and Klingeman (1982) in their analysis and had flow discharges that ranged between 1.02 and 3.4 m^3/s . Using the synthetic distributions of τ , our equation predicted bed load rates within an order magnitude of error for all 22 events. Considering the logarithm of the ratio between the measured and predicted bed load transport rate ($\log(q_{b_{pred}}/q_{b_{meas}})$), which is a measure of the accuracy of an estimation (0 indicates perfect agreement and ± 1 an error of an order of magnitude, Yager et al., 2007), the estimated bed load rates had a median $\log(q_{b_{pred}}/q_{b_{meas}})$ of -0.07, minimum of -0.84, 25th percentile of -0.42, 75th percentile of 0.17, and a maximum of 0.55.

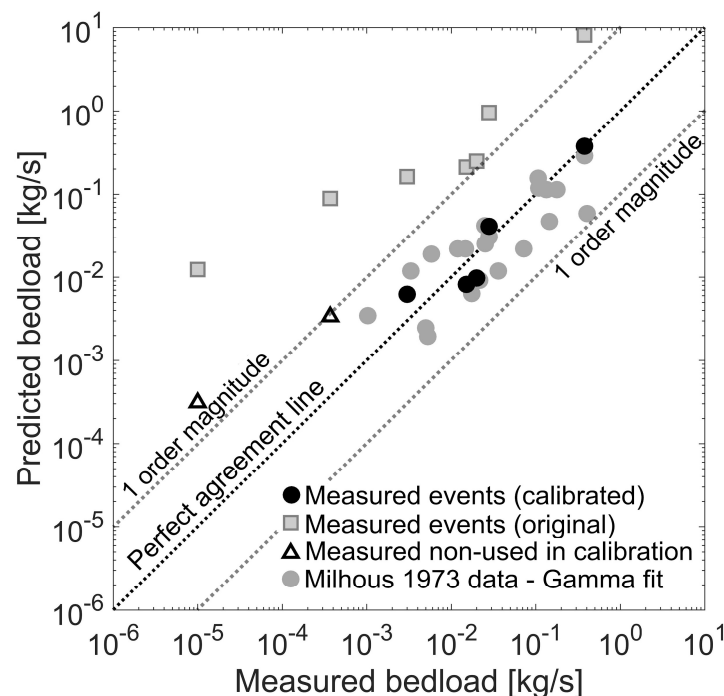

300 Figure 6: Comparison between measured and predicted bed load transport rate for different methods and data sets. Five events ($Q \geq 0.99 \text{ m}^3/\text{s}$) were used when calibrating Equation 8 (Eq. 8) (black circles). Triangles represent the estimated bed load using Equation 8 (Eq. 8) for two low flow events ($Q < 0.64 \text{ m}^3/\text{s}$) that were not used for calibration. The equation of Parker and Klingeman (1982) applied locally to the complete shear stress distributions is shown as reference (squares). Additionally, a synthetic spatial shear distribution based on equation 2 and the

305

parameters given in equations 13–15 (Eq. 13) to (Eq. 15) was used with our equation to calculate the bed load rate (grey circles). Measured field data were collected by Milhous (1973).

Table 2: Modeled (q_{b_pred}) and observed (q_{b_meas}) bed load transport rates and modeled (D_{50_pred}), Nash-Sutcliffe efficiency index, and observed (D_{50_meas}) median grain size for the events used in the calibration of equation 8 (Eq. 8).

Q (m^3/s)	q_{b_meas} (kg/s)	q_{b_pred} (kg/s)	$\log\left(\frac{q_{b_pred}}{q_{b_meas}}\right)$	<u>Nash-Sutcliffe efficiency index</u>	D_{50_meas} (mm)	D_{50_pred} (mm)
0.99	$3.01 \cdot 10^{-3}$	$6.23 \cdot 10^{-3}$	0.32	<u>0.66</u>	7.7	20.0
1.33	$1.51 \cdot 10^{-2}$	$0.82 \cdot 10^{-2}$	-0.27	<u>0.94</u>	13.6	19.9
1.46	$2.00 \cdot 10^{-2}$	$0.98 \cdot 10^{-2}$	-0.31	<u>0.85</u>	10.2	20.1
1.91	$2.8 \cdot 10^{-2}$	$4.11 \cdot 10^{-2}$	0.17	<u>0.97</u>	18.8	21.3
3.40	$3.78 \cdot 10^{-1}$	$3.76 \cdot 10^{-1}$	0.00	<u>0.88</u>	30.1	22.5

310

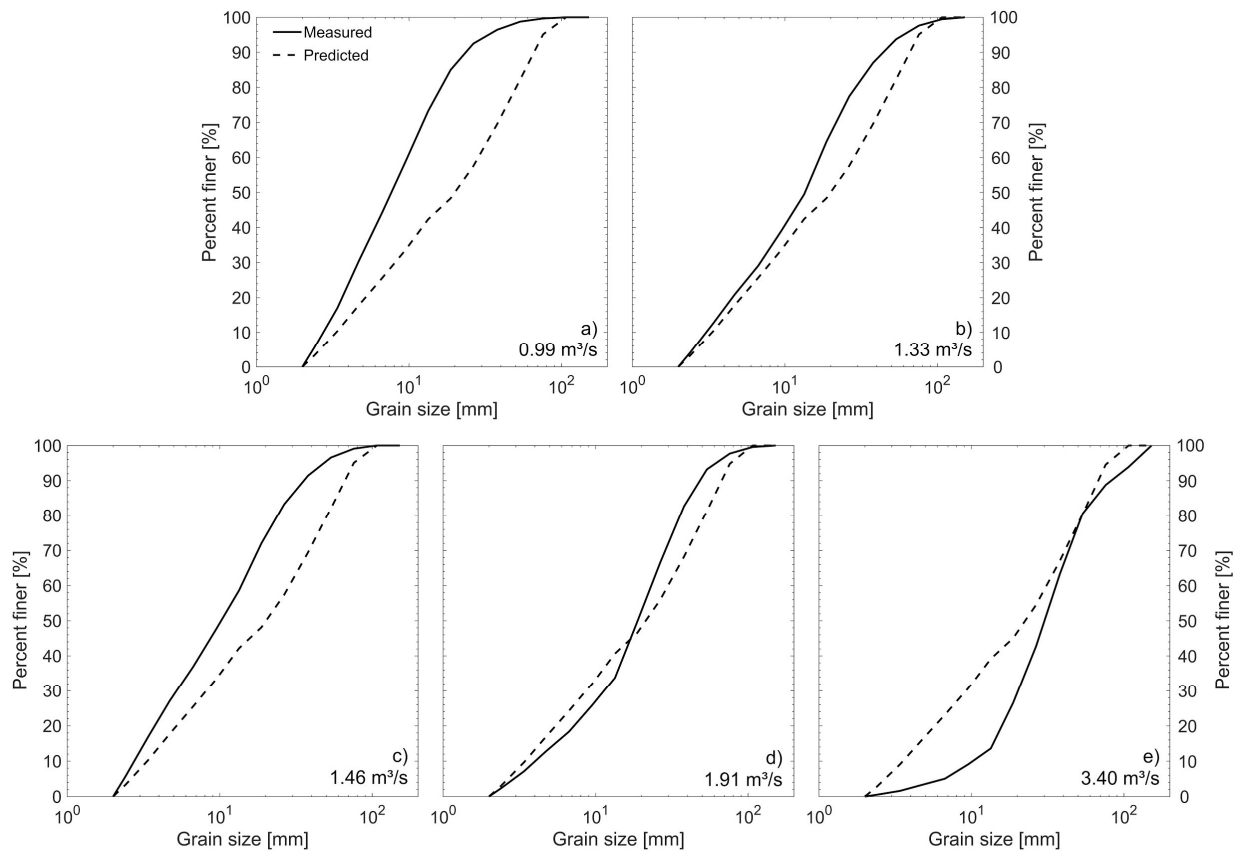


Figure 7: Measured and predicted bed load grain size distributions for all events used in the calibration of equation 8 (Eq. 8). Flow discharges are shown in the lower-left corner of each panel.

315

Based on the local shear stress we identified the areas of the bed where most of the bed load likely occurs for a given flow level (figure 8). Similar to the study of (Segura and Pitlick, (2015), in terms of bed load transport rate per unit width, the size of these areas increases with discharge. At 0.29 Q_{bf} ($Q = 0.99 m^3/s$) most bed load transport occurs in

a relatively small, localized area of the bed, occupying approximately 5.4% of the total bed area (100% is the wetted area under bankfull flow conditions). The percentage increases to 7.6% at $0.43 Q_{bf}$ ($Q = 1.46 \text{ m}^3/\text{s}$) and 17.5% for $0.56 Q_{bf}$ ($Q = 1.91 \text{ m}^3/\text{s}$). At bankfull flow conditions ($Q = 3.40 \text{ m}^3/\text{s}$) the proportion of the channel bed that is predicted to be mobile is 52.5%, and mainly concentrated along the thalweg. It is important to mention that this method provides only an approximation to the region where most bed load occurs. In this approach we are not considering bed evolution and other time-dependent processes that may alter the location of areas where bed load transport occurs.

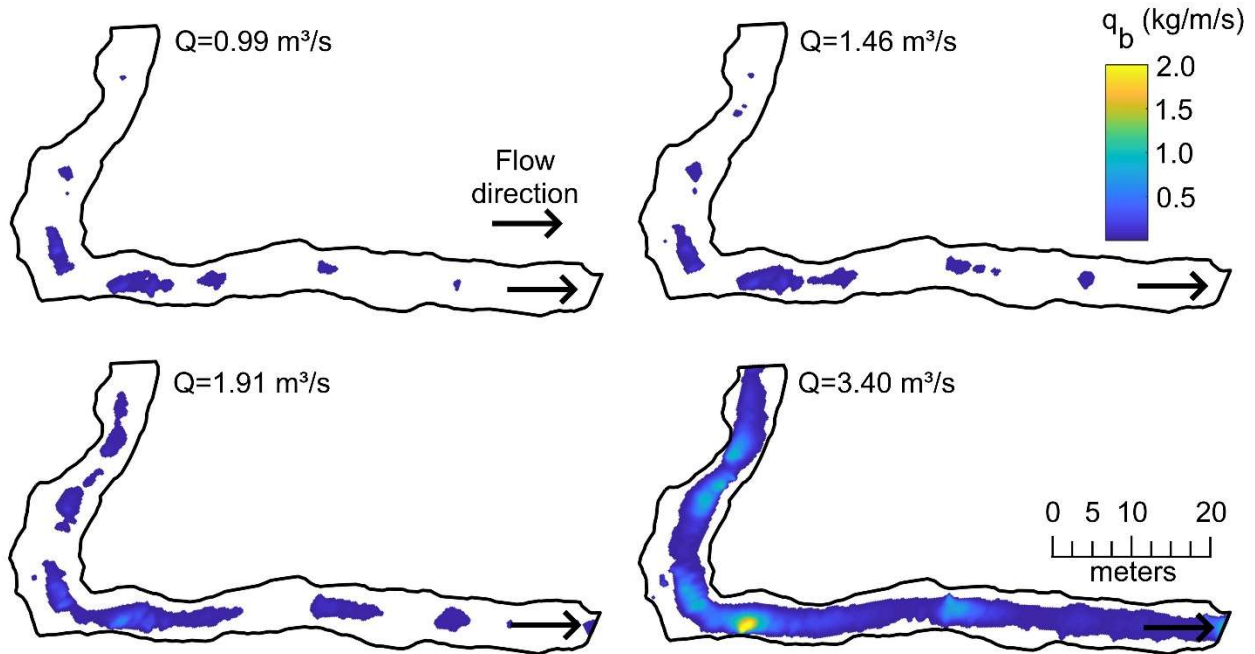


Figure 8: Predicted local bed load transport rate per unit width (q_b) for four flows levels between 0.29 to $1.00 Q_{bf}$. White areas in each case indicate zero predicted transport. Black lines correspond to the wetted area under bankfull flow conditions. Maps of the predicted local shear stress for the same study area and flow scenarios are available in Katz et al. (2018)

4 Discussion

4.1 Using spatial distribution of shear stress to estimate reach-average bed load rates

Existing transport equations represent the available shear stress for a given flow with a single shear stress value, usually the reach-averaged total shear stress estimated as the depth-slope product. In other words, most of the available equations assume that this single shear stress value represents the entire shear stress distribution for any given flow level. While this assumption may be appropriate in certain cases, for example in straight reaches with few roughness elements, it is unlikely to represent the hydraulic conditions in complex reaches with variable planforms and roughness characteristics. In our approach, we explicitly account for the local variability in bed surface elevation, channel curvature, and roughness characteristics by including spatially variable estimates of shear stress over a range of hydraulic conditions within the reach, making it more applicable to a wide range of stream types. The main difference

between the transport function proposed in equation 8 (Eq. 8) and those typically used when estimating bed load transport rates (e.g., Parker, 1990; Parker et al., 1982; Recking, 2013b; Wilcock and Crowe, 2003) is that equation 8 uses the full distribution of shear stress rather than the reach-averaged shear stress value for a given flow. In practical applications, both approaches require the same input data, specifically, a given discharge, measure of bed roughness, GSD, and bed surface elevation. While it may be enough for equations using the reach-averaged τ to define energy gradients using a longitudinal bed profile, our method requires detailed measurements of bed topography to adequately construct a numerical 2D flow model to estimate spatial shear stress distributions. Although acquiring detailed bed surface topography may be restrictive, this method offers an alternative to modern approaches that rely on detailed field measurements to estimate the τ applied to the mobile sediment fractions of a given bed. Current flow resistance and shear stress partitioning techniques used in mountain river applications require a characterization of the macro-roughness (Nitsche et al., 2011, 2012) that involve careful field measurements of the diameter, protrusion, concentration, and spacing of boulders (e.g., Monsalve et al., 2016b; Yager et al., 2012a), length, slope, and height of steps (Nitsche et al., 2011), and every other source of roughness beside skin friction. Therefore, in general terms, comparable field effort is required for both modelling of shear stress and estimating of shear stress partition.

We modified a sub-surface based equation to include the spatial distribution of shear stress (i.e., Parker and Klingeman, 1982). Alternatively, we could have chosen to modify the surface-based equation of (Parker, 1990), also developed using data from Oak Creek, because from a mechanistic point of view it is the bed surface that is in contact with the water whereas the subsurface is not always directly accessed by the flow. However, the fits for the larger number of parameters in the Parker (1990) approach would have been weaker considering the few number of flow events with sufficient information of both the bed load GSD and spatial distribution of shear stress (Table 2) (see also section 4.2). Nonetheless, future improvements of our approach could consider the use of a surface-based equation (e.g., Parker (1990) or (Wilcock and Crowe, 2003)).

4.2 Alternative formulations for sediment transport prediction using spatial distribution of shear stress

When calibrating equation 8 we used a total of five flow levels covering a wide range of discharges, from the lower limit (approximately $0.29 Q_{bf}$) used by Parker and Klingeman (1982) up to bankfull conditions. While conducting the calibration we found an alternative formulation defined by a single equation (instead of a two-part equation like equation 8 - also calibrated for flows above $0.99 \text{ m}^3/\text{s}$). This equation performed well over a wider range of flows, including those between 0.4 and $0.64 \text{ m}^3/\text{s}$:

$$W_i^* = 0.38 \left(1 - \frac{1.5}{\phi_i}\right)^{1.5}, \text{ for } \phi_i \geq 1.5 \quad (\text{Eq. 16})$$

The performance of equations 8 and 16 and in terms of predicted bed load transport rates and GSD was relatively similar for $Q \geq 0.99 \text{ m}^3/\text{s}$ (Table 3, for simplicity only D_{50} is shown). However, equation 16 (Eq. 16) also predicted q_b and GSD well for all discharges lower than $0.99 \text{ m}^3/\text{s}$, with errors below an order of magnitude. When equation 8 (Eq. 8) is applied to the $0.4 \text{ m}^3/\text{s}$ flow it overestimates the measured bed load rate by 27 times (figure 6). It is important to remark that in the calibration process of equations 8 and 16 (Eq. 8) and (Eq. 16) the discharge levels of

375 0.4 and 0.64 m³/s were not used. We presented equation 8 in the results section because it resembles the Parker and
 Klingeman (1982) equation to which we were comparing ~~(figure 6)~~ ~~(Figure-6)~~. However, from practical perspective
 either formulation could have been used for $Q > 0.99$ m³/s. The ability of equation ~~16~~ ~~(Eq. 16)~~ to accurately capture
 low flow events is explored in detail in section 4.3.

380

Table 3: Bed load transport rates (q_b) and median grain size estimates (D_{50}) using ~~equations 8 and 16~~ ~~(Eq. 8) and~~
~~(Eq. 16)~~.

Q	q_{b_meas}	q_{b_pred}	q_{b_pred}	$\log\left(\frac{q_{b_pred}}{q_{b_meas}}\right)$	$\log\left(\frac{q_{b_pred}}{q_{b_meas}}\right)$	D_{50_meas}	D_{50_pred}	D_{50_pred}
		Eq. 8	Eq. 16	Eq. 8	Eq. 16		Eq. 8	Eq. 15
(m ³ /s)	(kg/s)	(kg/s)	(kg/s)	(-)	(-)	(mm)	(mm)	(mm)
0.40	$1.17 \cdot 10^{-5}$	$3.11 \cdot 10^{-4}$	$1.78 \cdot 10^{-6}$	1.42	-0.82	4.0	13.7	3.3
0.64	$3.65 \cdot 10^{-4}$	$3.37 \cdot 10^{-3}$	$1.56 \cdot 10^{-3}$	0.96	0.63	5.1	19.9	16.2
0.99	$3.01 \cdot 10^{-3}$	$6.23 \cdot 10^{-3}$	$3.31 \cdot 10^{-3}$	0.32	0.04	7.7	20.0	20.0
1.33	$1.51 \cdot 10^{-2}$	$8.18 \cdot 10^{-3}$	$4.32 \cdot 10^{-3}$	-0.27	-0.54	13.6	19.9	19.9
1.46	$2.00 \cdot 10^{-2}$	$9.76 \cdot 10^{-3}$	$5.37 \cdot 10^{-3}$	-0.31	-0.57	10.2	20.1	20.1
1.91	$2.8 \cdot 10^{-2}$	$4.11 \cdot 10^{-2}$	$3.44 \cdot 10^{-2}$	0.17	0.09	18.8	21.3	21.3
3.40	$3.78 \cdot 10^{-1}$	$3.76 \cdot 10^{-1}$	$3.76 \cdot 10^{-1}$	0.00	0.00	30.1	22.5	22.5


385

4.3 Comparison between equation 8 and 16 and Parker and Klingeman (1982)

Not surprisingly the subsurface-based sediment transport equation of Parker and Klingeman (1982) gives accurate
 estimates of bed load for flow events capable of breaking the pavement in a certain reach, given that the equation was
 exclusively developed for those conditions. Since we are presenting a new approach for estimating bed load transport
 rates we compared the performance of ~~the proposed~~ ~~equations (8 and 16)~~ ~~(Eq. 8) and~~ ~~(Eq. 16)~~ to the Parker and Klingeman (1982)
 equation. First, we studied the accuracy of these three methods for 27 events with flow discharges larger than 1 m³/s
~~(figure 8 a)~~ ~~(a)~~. All approaches had practically an equal performance when predicting these sediment transport events
 and had estimates within an order of magnitude of error ~~(figure 8 b)~~ ~~(b)~~. The equations of Parker and Klingeman
 (1982) and ~~Equation 8~~ predicted a total of 16 events (59%) within factor of 2 (between 0.5 to 2 times the measured
 bed load rate), whereas ~~Equation 16~~ ~~(Eq. 16)~~ predicted ~~had~~ 14 events within this range (52%). Compared to
 Parker and Klingeman (1982) ~~Equation 8 and 16~~ ~~(Eq. 8) and~~ ~~(Eq. 16)~~ under predicted bed load for most of
 the events but had a slight improvement in terms of the RMSE of the predicted bed load transport rate ~~(figure 8 b)~~
~~(Figure 8 b)~~.

390

395

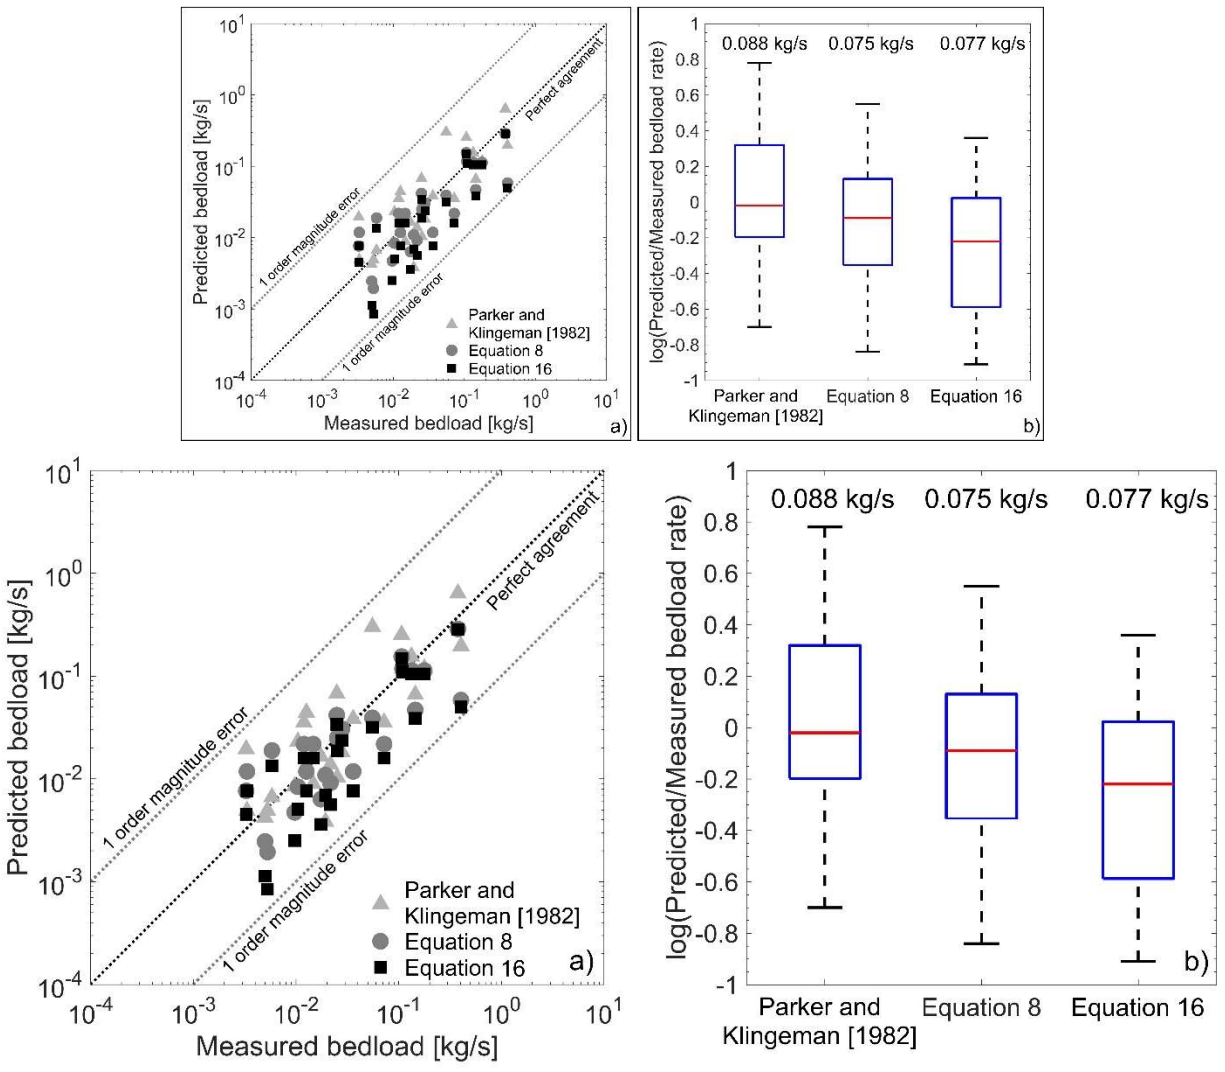

400

Figure 9: a) Comparison between measured and predicted bed load transport rate using the Parker and Klingeman (1982) equation and [equations 8 and 16 \(Eq. 8\) and \(Eq. 16\)](#). In this case, Parker and Klingeman (1982) was applied as proposed in the original publication (i.e., using reach-averaged flow properties). [Equations 8 and 16 \(Eq. 8\) and \(Eq. 16\)](#) use spatial distributions of τ obtained with a Gamma function and α and β parameters varying with Q . b)

405

The log of the ratio of predicted to measured sediment bed load rate for the three approaches. A value of zero indicates that the measured volume was predicted exactly. The top and bottom of each box are the 25th and 75th percentiles and the middle line inside the box is the median value. Lines extending out of the box correspond to the maximum and minimum predicted bed load ratios. The rate at the top of each box corresponds to the RMSE of the predicted bed load rate.

410

One limitation of Parker and Klingeman (1982) equation is that it is valid only for $\phi > 0.95$. In practical terms, a value of $\phi = 0.95$ in Oak Creek is close to the already mentioned discharge of 1 m³/s. This relatively high value introduces a practical limitation in the applicability of this method because low discharges are more frequent than high flow events. According to 266 observed sediment transport events in Oak Creek, including the data of Milhous (1973) and measurements collected 1978–1990, the majority of the monitored events (~86%) were at discharges below 1 m³/s. In all these cases (230 events) a bed load transport rate was measured. Using this data set we tested the performance of equations- [8 and 16 \(Eq. 8\) and \(Eq. 16\)](#) for predicting low and high flow events that vary [between](#)

415

0.01 and 3.4 m³/s. Given that our equations use the distribution of shear stress they, theoretically, should predict sediment transport even at relatively low flows and, by doing so, they would overcome the limitation of the Parker and Klingeman (1982) formulation.

420

Equations 8 and 16 predicted relatively similar bed load rates for discharges above 0.8 m³/s (figure 9 a)-(a). For $Q < 0.8$ m³/s, the equations they behave differently. Equation 8 (Eq. 8) had consistently larger q_b compared to equation 16 (Eq. 16). The difference between equations 8 and 16 (Eq. 8) and (Eq. 16) increased as flow discharge decreased and the maximum difference was about 15 times for $Q = 0.01$ m³/s (figure 9 a)-(a). We found that 91% of the observed sediment transport events in Oak Creek were predicted within an order magnitude (figure 9 b)-(b) with equation 16. In general, equation 8 (Eq. 8) under predicted q_b while equation 16 over predicted q_b . Specifically, equation 8 over predicted bed load for 72% of the discharge events ~~cases were over predicted by equation (Eq. 8) while equation 16 under predicted bed load for and 67% were under predicted by equation (Eq. 16) of the discharge events (figure 9 c)-(e)~~. These percentages discrepancies were also reflected in the distribution of the percentiles 25th, 75th, and the median ratio of predicted ~~to to measured~~ measured bed load rate values (figure 9 c)-(Figure 9 e) ratios. Considering the logarithm of this ratio, for equation 8 the 25th, 50th, and 75th percentiles were 0.52, 0.92, and 0.04 while for equation 16 the 25th, 50th, and 75th percentiles were -0.24, 0.14, and -0.58 (figure 9 c) ~~the median values were 0.52 and -0.24, the 25th percentile were 0.92 and 0.14, and the 75th percentile were -0.04 and -0.58 when equations 8 and 16 and were used, respectively (-e)~~. Contrary to Parker and Klingeman (1982), equations 8 and 16 ~~our equations~~ were able to predict q_b at low flows because the lower limit of $\phi = 0.95$ in equation 8 (Eq. 8) or $\phi = 1.5$ in equation 16 (Eq. 16) did not correspond to a given discharge (1 m³/s in the case of Parker and Klingeman (1982)). Instead, when using our equations (8 and 16), ϕ varies locally with Q such that it captures high values of τ that occur even at very low flows in small portions of the bed.

425

430

435

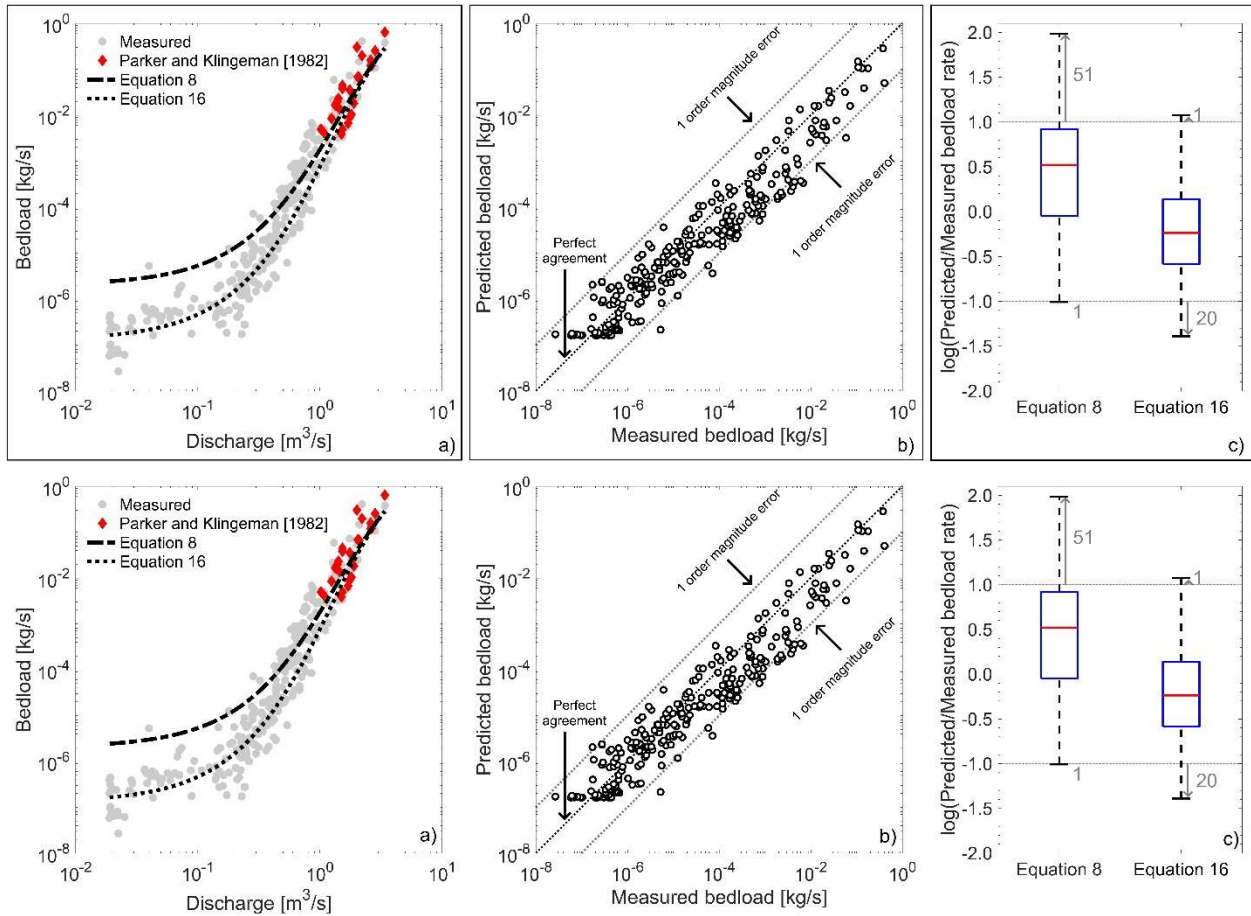


Figure 10: a) Measured and predicted bed load transport rates as a function of discharge. [Equations 8 and 16 \(Eq. 8\) and \(Eq. 16\)](#) can be represented as a continuous line because the spatial distributions of τ and the α and β parameters vary with Q . Predictions of Parker and Klingeman (1982) were calculated using the reach-averaged shear stress based on Milhous (1973) measurements. Therefore, shear stress does not monotonically increase with larger discharges. b) Measured versus predicted bed load transport rate using equation [16 \(Eq. 16\)](#). c) The log of the ratio of predicted to measured sediment bed load rate for [equations 8 and 16 \(Eq. 8\) and \(Eq. 16\)](#). Grey arrows extending out of the box correspond to the number of events under- or over-predicted [bed load](#) by more than an order magnitude error.

4.4 Practical and management implications

The ability of [the our](#)-proposed transport [equations 8 and 16 functions \(\(Eq. 8\) and \(Eq. 16\)\)](#) to accurately predict bed load transport rate at a wide range of flows allows our approach to be applied across many different practical scenarios. For small streams like Oak Creek (less than ~ 10 m in bankfull width) with relatively simple channel geometry and low relative roughness, equations 13–15 can be combined with equation 16 to estimate q_b across a range of flow levels and without a 2D hydraulic model. Equations 13–15 can first be used to estimate the τ distribution for a given discharge level and then [Equation 16](#) can be used with that distribution to estimate q_b . Because streams of this type are fairly ubiquitous in modern urban and suburban society, this method can be applied to a range of management situations such as addressing elevated sediment loads caused by urbanization or glacial retreat. For larger streams and rivers, our approach can be utilized in conjunction with the development of a 2D hydraulic model to accurately estimate sediment transport using either [Equation 8](#) or 16. In all situations, [our](#) approach is an improvement on

previous methods in predicting bed load transport for lower flow levels. This is especially important because it allows for practitioners to better predict the responses of management actions on sediment transport dynamics for these more frequent flow levels. It should be noted that, although our method could be capable of predicting fluxes with better accuracy than previous approaches, all our results are based on measurements in single river reach of Oak Creek. Therefore, we would recommend using this method with caution until it has been further tested in other systems.

5 Conclusions

Compared to traditional subsurface sediment transport equations that use reach-averaged properties, the proposed equations ~~here-were~~ able to accurately ~~capture-predict~~ the observed bed load rates at a wider range of flow levels. The shape of the spatial distribution of shear stress was relatively similar for different discharges and allowed us to characterize it in terms of a Gamma function. Therefore, we were able to extend our results to scenarios where no field measurements were made. Nonetheless, increasing the accuracy in bed load estimates requires additional efforts compared to the most approaches (i.e., reach-averaged equations). Specifically, the method proposed relies on detailed numerical flow modelling and field measurements, which can restrict the applicability in typical practical studies. However, this may not be a limitation for its use. Considering that realistic estimates of flow resistance in gravel-bed rivers require a characterization of the all sources of roughness, including macro-roughness elements, both approaches need similar field effort, which is from a practical point of view, the most time-consuming process. In our method, accurate estimate of bed load transport rates at low flow discharge were possible because we explicitly considered high values of τ , even though they occur in small portions of the bed. Future lines of work should include the extension of surface-based bed load equations and exploring how the shape of the spatial distribution of shear stress varies in other rivers with different geomorphological conditions (e.g., step-pool morphologies, steeper slopes, bed surface patchiness, etc.).

6 Acknowledgments

We thank to Dr. Pete Klingeman who led the Oak Creek Sediment Transport facility which collected the database used as the basis for this study. Without Pete, none of this would have been possible. This research was funded by the National Science Foundation (Award No. # 1619700) and the USDA National Institute of Food and Agriculture (McIntire Stennis project OREZ-FERM-876). We also thank Dr. Allison Pfeiffer and Dr. James Pizzuto for their constructive comments that helped improve an earlier version of this manuscript. The authors would like to thank the McDonald Dunn Forest Director, Dr. Stephen Fitzgerald, for logistical support setting our study site. Richard McDonald of the USGS provided very useful suggestions in the hydrodynamic model FaSTMECH.

6 References

- Barry, J. J., Buffington, J. M. and King, J. G.: A general power equation for predicting bed load transport rates in gravel bed rivers, *Water Resour. Res.*, 40(10), 1–22, doi:10.1029/2004WR003190, 2004.
- 500 Barton, G. J., McDonald, R. R., Nelson, J. M. and Dinehart, R. R.: Simulation of flow and sediment mobility using a multidimensional flow model for the white sturgeon critical-habitat reach, Kootenai River near Bonners Ferry, Idaho: U.S. Geological Survey Scientific Investigations Report 2005-5230, 54 p., 2005.
- Beschta, R. L.: Increased bag size improves Helley-Smith bed load sampler for use in streams with high sand and organic matter transport., in *Erosion and sediment transport measurement. Proceedings of the Florence symposium*
- 505 IAHS, pp. 17–25., 1981.
- Bevington, P. R. and Robinson, D. K.: *Data reduction and error analysis for the physical sciences*, 3rd Editio., McGraw-Hill. New York., New York, NY, USA., 2003.
- Bradley, D. N. and Tucker, G. E.: Measuring gravel transport and dispersion in a mountain river using passive radio tracers, *Earth Surf. Process. Landforms*, 37(10), 1034–1045, doi:10.1002/esp.3223, 2012.
- 510 Bunte, K., Abt, S. R., Potyondy, J. P. and Swingle, K. W.: A comparison of coarse bedload transport measured with bedload traps and Helley-Smith samplers, *Geodin. Acta*, 21(1–2), 53–66, doi:10.3166/ga.21.53-66, 2008.
- Clayton, J. A. and Pitlick, J.: Spatial and temporal variations in bed load transport intensity in a gravel bed river bend, *Water Resour. Res.*, 43(2), W02426, doi:10.1029/2006WR005253, 2007.
- Conner, J. T. and Tonina, D.: Effect of cross-section interpolated bathymetry on 2D hydrodynamic model results in a large river, *Earth Surf. Process. Landforms*, 39, 463–475, doi:10.1002/esp.3458, 2014.
- 515 Einstein, H. A.: *The bed-load function for sediment transportation in open channel flows*. U.S. Soil Conservation Service Technical Report 1026., 1950.
- Emmett, W. W.: *A field calibration of the sediment-trapping characteristics of the Helley-Smith bedload sampler*. USGS Professional paper 1139., 1980.
- 520 Ferguson, R. I.: The missing dimension: Effects of lateral variation on 1-D calculations of fluvial bedload transport, *Geomorphology*, 56, 1–14, doi:10.1016/S0169-555X(03)00042-4, 2003.
- Freedman, D. and Diaconis, P.: On the histogram as a density estimator: L2 theory, *Zeitschrift für Wahrscheinlichkeitstheorie und Verwandte Gebiete*, 57, 453–476, doi:10.1007/BF01025868, 1981.
- Gomez, B. and Church, M.: An assessment of bed load sediment transport formulae for gravel bed rivers, *Water*
- 525 *Resour. Res.*, 25(6), 1161–1186, doi:10.1029/WR025i006p01161, 1989.
- Katz, S. B., Segura, C. and Warren, D. R.: The influence of channel bed disturbance on benthic Chlorophyll a: A high resolution perspective, *Geomorphology*, 305, 141–153, doi:10.1016/j.geomorph.2017.11.010, 2018.
- Kinzel, P. J., Nelson, J. M. and Heckman, A. K.: Response of sandhill crane (*Grus canadensis*) riverine roosting habitat to changes in stage and sandbar morphology, *River Res. Appl.*, 25(2), 135–152, doi:10.1002/rra.1103, 2009.
- 530 Lisle, T. E., Nelson, J. M., Pitlick, J., Madej, M. A. and Barkett, B. L.: Variability of bed mobility in natural, gravel-bed channels and adjustments to sediment load at local and reach scales, *Water Resour. Res.*, 36(12), 3743–3755, doi:10.1029/2000WR900238, 2000.
- Maturana, O., Tonina, D., McKean, J. A., Buffington, J. M., Luce, C. H. and Caamaño, D.: Modeling the effects of

pulsed versus chronic sand inputs on salmonid spawning habitat in a low-gradient gravel-bed river, *Earth Surf. Process. Landforms*, 39, 877–889, doi:10.1002/esp.3491, 2014.

535 May, C. L. and Pryor, B. S.: Initial motion and bedload transport distance determined by particle tracking in a large regulated river, *River Res. Appl.*, 30, 508–520, doi:10.1002/rra.2665, 2014.

May, C. L., Pryor, B., Lisle, T. E. and Lang, M.: Coupling hydrodynamic modeling and empirical measures of bed mobility to predict the risk of scour and fill of salmon redds in a large regulated river, *Water Resour. Res.*, 45(5),

540 W05402, doi:10.1029/2007WR006498, 2009.

McDonald, R., Nelson, J., Paragamian, V. and Barton, G.: Modeling the effect of flow and sediment transport on white sturgeon spawning habitat in the Kootenai River, Idaho, *J. Hydraul. Eng.*, 136(12), 1077–1092, doi:10.1061/(ASCE)HY.1943-7900.0000283, 2010.

McDonald, R. R., Nelson, J. M. and Bennett, J. P.: Multi-Dimensional Surface-Water Modeling System User's

545 Guide. US Geological Survey Techniques and Methods 6-B2. US Geological Survey; Reston, VA., 2005.

Milhaus, R. T.: Sediment transport in a gravel-bottomed stream - Ph.D. Thesis, Department of Civil Engineering, Oregon State University., 1973.

Miller, A. J. and Cluer, B. L.: Modeling Considerations for Simulation of Flow in Bedrock Channels, in *Bedrock Channels*, in *Rivers Over Rock: Fluvial Processes in Bedrock Channels*, edited by K. J. Tinkler and E. E. Wohl,

550 American Geophysical Union, Washington, D.C., USA., 1998.

Monsalve, A. D., Yager, E. M., Turowski, J. M. and Rickenmann, D.: A probabilistic formulation of bed load transport to include spatial variability of flow and surface grain size distributions, *Water Resour. Res.*, 52(5), 3579–3598, doi:10.1002/2015WR017694, 2016.

Mueller, E. R. and Pitlick, J.: Sediment supply and channel morphology in mountain river systems: 2. Single thread

555 to braided transitions, *J. Geophys. Res. Earth Surf.*, 119, 1516–1541, doi:10.1002/2013JF002843.Sediment, 2014.

Nash, J. E. and Sutcliffe, J. V.: River flow forecasting through conceptual models part I — A discussion of principles, *J. Hydrol.*, 10(3), 282–290, doi:10.1016/0022-1694(70)90255-6, 1970.

Nelson, J. M. and McDonald, R. R.: Mechanics and modeling of flow and bed evolution in lateral separation eddies, U.S. Geological Survey, Glen Canyon Environmental Studies Report, Flagstaff, Arizona, USA., 1995.

560 Nelson, J. M. and Smith, J. D.: Flow in meandering channels with natural topography, in *River Meandering*, *Water Resources Monographs*, vol. 12, edited by S. Ikeda and G. Parker, pp. 69–102, American Geophysical Union, Washington, D.C., USA., 1989.

Nelson, J. M., Bennett, J. P. and Wiele, S. M.: Flow and Sediment-Transport Modeling, in *Tools in Fluvial Geomorphology*, edited by G. M. Kondolf and H. Piegay, pp. 539–576, John Wiley & Sons, Ltd, Chichester, UK.,

565 2003a.

Nelson, J. M., Bennett, J. P. and Wiele, S. M.: Flow and Sediment-Transport Modeling, in *Tools in Fluvial Geomorphology*, pp. 539–576., 2003b.

Nelson, P. A., Dietrich, W. E. and Venditti, J. G.: Bed topography and the development of forced bed surface patches, *J. Geophys. Res. Earth Surf.*, 115, F04024, doi:10.1029/2010JF001747, 2010.

570 Nicholas, A. P.: Modelling bedload yield braided gravel bed rivers, *Geomorphology*, 36, 89–106,

doi:10.1016/S0169-555X(00)00050-7, 2000.

Nitsche, M., Rickenmann, D., Turowski, J. M., Badoux, A. and Kirchner, J. W.: Evaluation of bedload transport predictions using flow resistance equations to account for macro-roughness in steep mountain streams, *Water Resour. Res.*, 47, W08513, doi:10.1029/2011WR010645, 2011.

575 Nitsche, M., Rickenmann, D., Kirchner, J. W., Turowski, J. M. and Badoux, A.: Macroroughness and variations in reach-averaged flow resistance in steep mountain streams, *Water Resour. Res.*, 48(12), W12518, doi:10.1029/2012WR012091, 2012.

O'Connor, J. E., Mangano, J. F., Anderson, S. W., Wallick, J. R., Jones, K. L. and Keith, M. K.: Geologic and physiographic controls on bed-material yield, transport, and channel morphology for alluvial and bedrock rivers, western Oregon, *Bull. Geol. Soc. Am.*, 126(3–4), 377–397, doi:10.1130/B30831.1, 2014.

580 O'leary, S. J. and Beschta, R. L.: Bedload transport in an Oregon coast range stream, *Water Resour. Bull.*, 17(5), 1981.

Olinde, L. and Johnson, J. P. L.: Using RFID and accelerometer-embedded tracers to measure probabilities of bed load transport, step lengths, and rest times in a mountain stream, *Water Resour. Res.*, 51, 7572–7589, doi:10.1002/585 2014WR016120, 2015.

Paola, C.: Incoherent structure: Turbulence as a metaphor for stream braiding, in *Coherent Flow Structures in Open Channels*, edited by P. Ashworth, S. J. Bennett, J. L. Best, and S. McLelland, pp. 706–723, John Wiley, Chichester, UK., 1996.

590 Parker, G.: Self-formed straight rivers with equilibrium banks and mobile bed. Part 2. The gravel river, *J. Fluid Mech.*, 89(1), 127–146, doi:10.1017/S0022112078002505, 1978.

Parker, G.: Surface-based bedload transport relation for gravel rivers, *J. Hydraul. Res.*, 28(4), 417–436, doi:10.1080/00221689009499058, 1990.

Parker, G. and Klingeman, P. C.: On why gravel bed streams are paved, *Water Resour. Res.*, 18(5), 1409, doi:10.1029/WR018i005p01409, 1982.

595 Parker, G., Klingeman, P. C. and McLean, D. G.: Bedload and size distribution in paved gravel-bed streams, *J. Hydraul. Div.*, 108(4), 544–571, 1982.

Paustian, S. J. and Beschta, R. L.: The suspended sediment regime of an Oregon coast range stream, *JAWRA J. Am. Water Resour. Assoc.*, 15(1), 144–154, doi:10.1111/j.1752-1688.1979.tb00295.x, 1979.

600 Pitlick, J.: Variability of Bed Load Measurement rare by Heiley National describing The severely channel of Roaring River by the failure response load and Thorne , have consistently of hours) larger scale bed forms which is considered inherent to the bed turbulent be , , 24(1), 173–177, 1988.

Pitlick, J., Mueller, E. R. and Segura, C.: Differences in Sediment Supply to Braided and Single-Thread River Channels: What Do the Data Tell Us?, in *Gravel-Bed Rivers: Processes, Tools, Environments*, edited by M. Church, P. M. Biron, and A. G. Roy, pp. 502–511, John Wiley & Sons, Ltd., Chichester, UK., 2012.

605 Press, W. H., Teukolsky, S. A., Vetterling, W. T. and Flannery, B. P.: *Numerical Recipes: The Art of Scientific Computing*, 3rd Editio., Cambridge University Press, Cambridge., 2007.

Recking, A.: An analysis of nonlinearity effects on bed load transport prediction, *J. Geophys. Res. Earth Surf.*,

118(3), 1264–1281, doi:10.1002/jgrf.20090, 2013a.

Recking, A.: Simple method for calculating reach-averaged bed-load transport, *J. Hydraul. Eng.*, 139(1), 70–75, doi:10.1061/(ASCE)HY.1943-7900.0000653., 2013b.

610 Rickenmann, D. and McArdell, B. W.: Continuous measurement of sediment transport in the Erlenbach stream using piezoelectric bedload impact sensors, *Earth Surf. Process. Landforms*, 32(9), 1362–1378, doi:10.1002/esp.1478, 2007.

Schmidt, K. -H and Ergenzinger, P.: Bedload entrainment, travel lengths, step lengths, rest periods—studied with passive (iron, magnetic) and active (radio) tracer techniques, *Earth Surf. Process. Landforms*, 17(2), 147–165, doi:10.1002/esp.3290170204, 1992.

615 Segura, C. and Pitlick, J.: Coupling fluvial-hydraulic models to predict gravel transport in spatially variable flows, *J. Geophys. Res. Earth Surf.*, 120, 834–855, doi:10.1002/2014JF003302, 2015.

Turowski, J. and Rickenmann, D.: Measuring the statistics of bed-load transport using indirect sensors, *J. Hydraul. Eng.*, 137(1), 116–121, doi:10.1061/(ASCE)HY.1943-7900.0000277, 2011.

620 Vericat, D., Church, M. and Batalla, R. J.: Bed load bias : Comparison of measurements obtained using two (76 and 152 mm) Helley-Smith samplers in a gravel bed river, *Water Resour. Res.*, 42, W01402, doi:10.1029/2005WR004025, 2006.

Wilcock, P. R. and Crowe, J. C.: Surface-based transport model for mixed-size sediment, *J. Hydraul. Eng.*, 129(2), 625 120–128, doi:10.1061/(ASCE)0733-9429(2003)129:2(120), 2003.

Wyss, C. R., Rickenmann, D., Fritschi, B., Turowski, J. M. and Weitbrecht, V.: Laboratory flume experiments with the Swiss plate geophone bed load monitoring system: 1. Impulse counts and particle size identification, *Water Resour. Res.*, 52, 7744–7759, doi:10.1002/2015WR018555, 2016a.

Wyss, C. R., Rickenmann, D., Fritschi, B., Turowski, J. M., Weitbrecht, V., Travaglini, E., Bardou, E. and Boes, R. 630 M.: Laboratory flume experiments with the Swiss plate geophone bed load monitoring system: 2. Application to field sites with direct bed load samples, *Water Resour. Res.*, 52, 7760–7778, doi:10.1002/2016WR019283, 2016b.

Wyss, C. R., Rickenmann, D., Fritschi, B., Turowski, J. M., Weitbrecht, V. and Boes, R. M.: Measuring bed load transport rates by grain-size fraction using the swiss plate geophone signal at the erlenbach, *J. Hydraul. Eng.*, 142(5), doi:10.1061/(ASCE)HY.1943-7900.0001090, 2016c.

635 Yager, E. M., Kirchner, J. W. and Dietrich, W. E.: Calculating bed load transport in steep boulder bed channels, *Water Resour. Res.*, 43(7), W07418, doi:10.1029/2006WR005432, 2007.

Yager, E. M., Dietrich, W. E., Kirchner, J. W. and McArdell, B. W.: Patch dynamics and stability in steep, rough streams, *J. Geophys. Res. Earth Surf.*, 117(2), 1–16, doi:10.1029/2011JF002253, 2012a.

Yager, E. M., Dietrich, W. E., Kirchner, J. W. and McArdell, B. W.: Prediction of sediment transport in step-pool 640 channels, *Water Resour. Res.*, 48(1), W01541, doi:10.1029/2011WR010829, 2012b.

Yager, E. M., Venditti, J. G., Smith, H. J. and Schmeeckle, M. W.: The trouble with shear stress, *Geomorphology*, 323, 41–50, doi:10.1016/j.geomorph.2018.09.008, 2018.