



Locating rock slope failures along highways and understanding their physical processes using seismic signals

5 Jui-Ming Chang¹, Wei-An Chao^{2,3}, Hongey Chen^{1,4}, Yu-Ting Kuo⁵, and Che-Ming Yang⁶

¹ Department of Geosciences, National Taiwan University, Taipei 10617, Taiwan.

² Department of Civil Engineering, National Chiao Tung University, Hsinchu 30010, Taiwan.

³ Disaster Prevention and Water Environment Research Center, National Chiao Tung University, Hsinchu 30010, Taiwan.

⁴ National Science and Technology Center for Disaster Reduction, New Taipei 23143, Taiwan.

10 ⁵ Department of the Earth and Environmental Sciences, National Chung-Cheng University, Chia-yi County 621, Taiwan.

⁶ Department of Civil and Disaster Prevention Engineering, National United University, Miao-Li 36003, Taiwan.

Correspondence to: Jui-Ming Chang (d04224006@ntu.edu.tw)

Abstract.

Regional monitoring of rock slope failures by the seismic technique is rarely studied due to significant source
15 location errors, and it still lacks the signal features needed for understanding events of this type because of the complex mass
movement involved. To better understand events of this type, ten known events along highways in Taiwan were analyzed.
First, a hybrid approach (GeoLoc) composed of cross-correlation-based and amplitude-attenuation-based approaches was
applied, and it produced a location error of maximum 3.19 km for the ten events. Then, we analyzed the ratio of local
magnitude (M_L) and duration magnitude (M_D) and found that a threshold of 0.85 yields successful classification between
20 rock slope failure and earthquake. Further, the GeoLoc can retrieve the seismic parameters, such as signal amplitude at the
source (A_0) and M_L of events, which are crucial for constructing scaling law with source volume (V). Indeed,
 $\text{Log}(V)=1.12M_L+3.08$ and $V=77,290A_0^{0.44}$ derived in this study provide the lower bound of volume estimation, since the
seismic parameters based on peak amplitudes cannot represent the full process of mass loss. Second, while video records
correspond with seismic signals, the processes of toppling and sliding present column- and V-shaped spectrograms,
25 respectively. The impacts of rockfall directly link directly to the pulses of seismic signals. Here, all spectrogram features of
events can be identified by event volumes larger than 2,000 m³, corresponding to the farthest epicenter distance ~2.5 km. The
previous results were obtained using the GeoLoc scheme for providing the government rapid reports for reference. Finally, a
recent event on 12th June 2020 was used to examine the GeoLoc scheme's feasibility. We estimated the event's volume by
the two scalings: 3,838 m³ and 3,019 m³, which was roughly consistent with the volume estimation of 5,142 m³ from the
30 digital elevation model. The physical processes, including rockfall, toppling, and complex motion behaviors of rock
interacting with slope inferred from the spectrogram features were comprehensively supported by the video record and field



investigation. We also demonstrated that the GeoLoc scheme, which has been implemented in Sinwulu catchment, Taiwan, can provide fast reports, including the location, volume, and physical process of events of this type to the public soon after they occur.

35

Key Words: rock slope failure, GeoLoc scheme, size estimation, spectrogram features, physical process

1. Introduction

Failures caused by the instability of rock mass are the most common geohazard in mountainous terrain. For this type of mass movement, rock instability can refer to the falling, toppling, slumping, sliding, spreading, creeping, or
40 avalanche of the mass block (Varnes, 1978). A lack of direct observations in the field leads to a challenge in determining the type of mass movement. In general, a rockfall involves physical processes, such as detachment, falling, rolling, bouncing, and fragmentation. It mainly interacts with the substrate, not necessarily with other moving fragments. A rockslide is usually due to instability along a bedding plane or a discontinuous, weakened structure, and often failure with a complex mechanism. A rock topple is forward rotation and overturning of the rock body (Hungr et al., 2013). Here, we use the term
45 ‘rock slope failure (RSF)’ to represent the aforementioned terms, including rockfall, rockslide, and rock topple along the highways, which can potentially cause damage to humans and the environment.

RSFs that occur along the highways may threaten road users and damage the road and facilities. Thus, it is essential to get precise information about the timing, location, and moving volume of such events within a short time for the purpose of issuing warnings and understanding the physical process of failures for assessment of hazard management, field survey,
50 and slope protection after events. Recently, the seismic technique has been widely used for those purposes for RSF events, not only on a local scale (Vilajosana et al., 2008 ; Helmstetter & Garambois, 2010 ; Zimmer et al., 2012 ; Zimmer and Sitar, 2015; Dietze et al., 2017; Roy et al., 2019), but also on a regional scale (Dammeier et al., 2011; Manconi et al., 2016; Fuchs et al., 2018). In the case of a free-fall event, the leading seismic signals corresponding to crack propagation and rock impact occupy a higher frequency band than do the signals induced by rock detachment and rebound (Levy et al., 2011;
55 Dietze et al., 2017; Roy et al., 2019). A series of field-scale block rockfall experiments were conducted to generate signal templates related to the rolling, bouncing, and impacting of a single block mass, with their respective pulse features shown in the spectrograms. During rock fall, the mass particle might be fragmented, and the individual particles not only interact with the topographic surface but also collide with each other (Hilbert et al., 2017; Saló et al., 2018). Based on a combined analysis of the seismic signals and high-speed video cameras, Saló et al. (2018) found that the impact of large rock boulders on slope
60 can generate lower frequency seismic signals than the impact corresponding to the process with fragmented blocks. Then, for the sliding phase, Manconi et al. (2016) indicated that the spectrograms induced by sliding-controlled behaviour exhibit the traditional triangular shape, which is the same feature as that of landslides (Chen et al., 2013; Hibert et al., 2014) and snow avalanches (Suriñach et al., 2005). Recent studies also concluded that massive, rapid landslides, which include the processes



of acceleration and deceleration, could generate strong long-period (10-150 second) seismic signals (Ekström and Stock
65 2013; Chao et al., 2017). By contrast, the on-site seismic signals of RSFs with frequencies up to 50-100 Hz would be very
helpful in exploring the source dynamics. However, most of the studies based on regional seismic networks focused on lower
frequencies ranging from 0.1-20 Hz due to the attenuation effect of wave propagation (Deparis et al., 2008; Dammeier et al.,
2011; Manconi et al., 2016; Fuchs et al., 2018), resulting in an imperfect understanding of the physical process of RSF.

Some studies have proposed a fully automatic scheme for locating and estimating the size of landslides (Chao et al.,
70 2017), rockslides (Manconi et al., 2016; Fuchs et al., 2018), and debris flows (Walter et al., 2017) for rapid response
purposes. At present, there are two approaches to scanning the location of an RSF: the cross-correlation (CC) method and the
amplitude source location (ASL) method. CC has been applied to sources with unclear phases in seismic arrivals, but this
technique is susceptible to the regional velocity model, station coverage, and signal-to-noise ratio (SNR) of observed signals
(Chen et al., 2013; Hibert et al., 2014), which are factors that influence location error. In contrast to CC, ASL does not
75 require a priori knowledge of the velocity structure and can estimate not only the source location but also the seismic
parameters, such as the elastic attenuation of seismic waves (α) and seismic amplitude at the source (A_0) (Aki and Ferrazzini,
2000; Jones et al., 2013; Rössli et al., 2014; Ogiso and Yomogida, 2015; Walter et al., 2017). However, ASL significantly
relies on not only large bursts of seismic amplitude, which are influenced by the site conditions, but also the distribution of
epicenter distance between each station and the source. Besides, the event size is a crucial issue for making a rapid report
80 after event occurrence. Recently, a simple scaling between the source magnitude and volume has been well established,
covering a wide range of source volumes from 10^0 to 10^6 m³. But, there is a scatter trend in the data distribution for volumes
ranging from 10^2 to 10^5 m³ (Roy et al., 2019), which is shown in this research.

In this study, we develop the GeoLoc scheme which can determine the location of geohazard, classify the source type,
estimate the event volume (V), and may offer the information about the physical process of RSF events. Thus, all
85 information yielded by the GeoLoc scheme may make possible rapid reports to the government. The method of location
determining also uses the GeoLoc, by combining the CC and ASL techniques with horizontal and vertical seismic signals. In
this case, ten RSFs with volumes ranging from 108 m³ to 164,000 m³ that occurred along highways (Table S1; see S1 in
Supplement) and were documented by the Directorate General of Highways (DGH) in Taiwan are used to explore the
feasibility of the GeoLoc. Further, the retrieved seismic parameters, A_0 from ASL and local magnitude (M_L) are used with
90 event volume to build regressions for volume estimation. With available videos published on public platforms (Table S2),
we demonstrated that important physical processes related to seismic signals could be clarified, when the farthest epicentral
distance is less than 2.5 km from events of at least 2,000 m³. After the successful feasibility test of ten events, a recent RSF
event occurred on June 12, 2020, which was used to underscore the implications of the potential use of this rapid reporting
system of RSF events that occur on slopes near highways.



95 2. Background setting and Seismic data

Taiwan is located at the boundary of the Eurasian Plate, and the Philippine Sea Plate (Fig. 1a), resulting in complex tectonic structures and high seismicity. A combined effect of extreme climate-forced erosion and strong earthquake shaking frequently causes RSF events. Vehicular traffic along three provincial highways, which cross the Taiwan Island from east to west, suffers from the potential threat of seismic failures, especially at Taroko National park along the east flank of central cross-island highway, which attracts more than four million tourists every year. Thus, a rapid RSF report system is sorely needed for the safety of highway travellers. In practice, after RSFs occur on highways, the materials blocking the road are cleared, and unmanned aerial vehicle (UAV) surveys are routinely performed by DGH. Some events can be captured by video and/or recorded by eyewitnesses. The above information allows us to obtain preliminary data about an RSF, such as the location, occurrence time, volume, and its physical process. Additionally, the Broadband Array in Taiwan for Seismology (BATS) seismic network, maintained by the Institute of Earth Sciences, Academia Sinica (IESAS) (Kao et al., 1998) and the Central Weather Bureau (CWB), is well distributed throughout Taiwan and provides high-quality seismic records for studying RSFs. The present broadband seismic network provides an opportunity to monitor RSFs. However, the primary purpose of this network is to monitor earthquakes. To enhance the station coverage along the highways for the high-risk areas (Crespi et al., 1996; Petley, 1998), temporal seismic arrays have been set up since March 2015 in Liwu catchment (shown as L-NET in Fig. 1b), consisting of one broadband seismometer (Guralp CMG-6TD; Station LW01) and four short-period sensors (KINKEI-KVS300; Stations LW02-LW05) and in Sinwulyu catchment (shown as S-NET in Fig. 1c), with seven broadband seismic stations (Trillium Compact: CLAB, DLNB, WLUB and XAMB; Guralp CMG-6TD: SW01-SW03). A total of 13 BATS/CWB broadband stations and 12 temporal stations are thus used in this study.

3. Flow chart of the GeoLoc scheme

This research has a flow chart showing the specific steps involved in a near-automatic scheme (GeoLoc). The GeoLoc scheme consists of a 4-step automatic procedure: (1) data pre-processing, (2) location process, (3) source classification, and (4) volume estimation (Fig. 2). However, manual time-frequency analysis is necessary for extracting the frequency band of bandpass filtering, the signal duration, and the physical process. The first of the two procedures is addressed in Section 3.1 and Section 3.2, respectively. Once the best location of the source is determined, the classification of the source type is required. We analyzed the ratio of local magnitude and duration magnitude (M_L/M_D) for the source classification and established scaling laws of V , M_L , and A_0 to estimate the event volume for the detected RSF event (see Section 4.2). The current GeoLoc scheme does not involve analyzing the physical process in automatic implementation (see Section 4.3). However, the optional time-frequency analysis could provide an event's physical process based on the spectrogram features, such as V-shaped, column-shaped, and pulse-like patterns. The GeoLoc scheme can be operated as a partly automatic monitoring system that delivers rapid reports providing the best source location and volume of the event to



the road users and government for RSF hazard assessment and mitigation. Comprehensive details are given in the following sections.

3.1 Data pre-processing

130 Based on the occurrence time and location of RSFs documented by the DGH, the three-component seismic recordings from nearby stations with a 180-second-length window can be cut and then undergo the pre-processing, including removing mean and linear trend. Further, the time-frequency spectrograms are constructed. In the present study, a filtering range is selected that can effectively explain the strong power spectral density (PSD) distributed in the time-frequency map of all stations. A series of spectrogram analyses utilizes the S-transform (Chen et al., 2013). Fig. 3 shows an example of
135 determining the filtering range for Event S4. The spectrogram of station ELDB shows a strong PSD with a wide frequency range of 1-30 Hz. In contrast, the PSD distribution of station SYNB is contained at frequencies below 8 Hz, while the high-frequency signals should decay due to the attenuation of seismic wave propagation. Indeed, cutoff frequencies of 1-8 Hz are used in the bandpass filter for Event S4. Other events are shown in Figs. S1-S4. The filtering range from 1 Hz to 8 Hz can be applied to most events, except for the two large-scale events (Events M1 and N1) and one single boulder impactation (Event
140 S5). Thus, the 1-8 Hz frequency range would be adopted in the real-time monitoring and the test of source classification. Then, we compute the root-mean-square (RMS) amplitudes of the filtered horizontal (N-S and E-W) and vertical waveforms and extract the horizontal and vertical envelope functions from the filtered RMS waveforms. Only when envelope functions have an SNR higher than 1.5, and the detected station number is over two, is the GeoLoc location process considered. The SNR is calculated from the ratio between short-term and whole-term (180 seconds in time length) averages. The short-term
145 average is the average value of a ± 5 -second time window whose center is the peak envelope amplitude.

3.2 Location process

In the GeoLoc location process, events are detected by at least two stations with signal-to-noise ratios (SNRs) exceeding 1.5 in the envelope functions. GeoLoc combines the cross-correlation (CC) method (Chen et al., 2013) and the
150 amplitude source location (ASL) method using the vertical and horizontal envelope functions for source location determination. The ASL technique not only locates the event but also provides the seismic parameters of the signal amplitude at the source (A_0) and signal decay constant (α) based on the best fit of the amplitude decay curve, which represents the peak-amplitude at i -th station (A_i) decay with increasing source-to-station distance (r_i) (equation (1); Walter et al., 2017). This ASL approach is available only when the epicentral distance is well-distributed for a large number of
155 stations. In the case of a lack of seismic recordings, the CC approach, which relies on each station pair's waveform similarity, can provide a possible solution to the estimated event location. However, the CC needs a velocity model to compute the theoretical travel-time difference between two stations. In contrast, ASL does not require prior knowledge of the velocity structure. Compared to ASL, the CC method produces only an event location. A velocity model of Wu et al.



(2007) is adopted in this study. A ± 25 second time window is used for the location process, and its center is the peak
160 envelope amplitude (black traces shown in Fig. 4). A grid point on the free surface topography with 0.01° spacing is
established for location search. For the ASL method, we assume surface waves are the dominant seismic wave type induced
by RSFs (Dietze et al., 2017), so n value in equation (1) of 0.5 ($n = 1$ for body waves and $n = 0.5$ for surface waves) is used
to account for the amplitude attenuation due to geometrical spreading.

$$A_i(r) = \frac{A_0}{r_i^n} e^{-\alpha r_i} \quad \text{Equation (1)}$$

165

The GeoLoc was applied to determine the CC location (X_{CC} , Y_{CC}) and ASL location (X_{ASL} , Y_{ASL}) simultaneously by
minimizing the misfit functions for events recorded by at least two stations. The misfit functions used in the ASL and CC
approaches are calculated from discrepancies in the peak envelope amplitude and cross-correlation amplitude, respectively.
The relative fitness value is then defined by the normalized misfit functions with ranges from 0 to 1. We then compute the
170 uncertainties ($\sigma X_{ASL/CC}$, $\sigma Y_{ASL/CC}$) of location results using the standard deviation of longitude and latitude for the source grid
points with the relative fitness value higher than 0.95. Then, the location result of the grid point with the highest relative
fitness is chosen as the best solution. To understand the relationship between location uncertainty and location error, it is
necessary to find the location error between the true location and the resulting source location. We found that the resulting
locations with uncertainties (σX and σY) less than 5 km exhibit the small location error (< 3.19 km). Thus, a threshold of
175 location uncertainty of 5 km is used, and only location results satisfying this threshold are available and discussed later in the
next section. For an event, the total amount of available result location (N) is 4. We characterize the quality of a solution for
the RSF event based on the N -value. The quality level labels are A: $3 \leq N$; B: $1 \leq N < 3$ and C: $N = 0$. The best-result source
location is determined by the minimum uncertainties from N . In Event S4, the three result location satisfies the uncertainty
threshold (red frame, Fig. 4), so the location quality is A. Then, the best-result source location is produced by the ASL with a
180 vertical envelope. For the Event N1, N is two belonging to the quality level B. The best location is the output by the CC with
a horizontal envelope.

4. Results and Discussion

4.1 Location

After analysing ten RSFs along highways, the events with quality levels A (Events S4 and M3) and B (Events S1,
185 S3, S6, and N1) that occurred during the non-typhoon period were determined with location errors between 0.97 and 3.19
km (Fig. 5a). The volume of those events is more massive than $2,000 \text{ m}^3$ (Table S1). Small event size and high background
noise level, which result in poor waveform quality causing the location quality level C, are two significant factors
contributing to location error. For example, the two smallest events with a volume of 108 m^3 (Event S5) and 400 m^3 (Event
M2) exhibit a high location error of 3.76 and 44.14 km, respectively. Even though Event M1 is the largest event, it can lead



190 to a large location error of 23.61 km because of the high background noise level during the typhoon period with low SNR
value at each station (Table S1).

A hybrid GeoLoc scheme provides a functional event location for the different station coverage conditions and the
distribution of epicentral distances. In general, the CC method mainly relies on station coverage. Thus, Event S4 shows that
location uncertainty has a clear trend along the station gap, existing in the northeast-to-southwest direction. However, there
195 is a relative lack of influence on the result derived from the ASL method (Fig. 4). On the contrary, Event N1, with proper
station coverage, still leads to a high location uncertainty in the ASL case, which underscores that a well-distributed
epicentral distance is a crucial factor for the ASL method.

4.2 Source discrimination and volume estimation

200 For rapid RSF hazard assessment along roads, successful source classification and event size estimation are needed.
Manconi et al. (2016) proposed that the ratio between the local magnitude (M_L) and the duration magnitude (M_D)
($M_L/M_D=0.8$) could effectively distinguish rockslide event from earthquake sources. To further examine the threshold of
 M_L/M_D in our case, we selected ten local earthquakes from the CWB catalogue (Table S3) and collected seismic records of
earthquakes from BATS and S-NET stations. We applied the same analysis procedures as in the RSF event, and all
205 earthquakes analyses resulted in location quality levels of A or B. For both earthquakes and RSFs, the magnitude scales of
 M_L and M_D for the best location are computed, and then the ratio of M_L/M_D is derived (see S3 in Supplement). In the case of
the earthquakes, the average M_L/M_D ratio is 0.98, with a minimum value of 0.86. For the RSFs, M_L/M_D ratios are on average
0.24 and never exceed 0.82. Thus, the threshold of M_L/M_D of 0.85 is used to distinguish RSFs and earthquakes (Fig. 5b). We
also found that the relationship between M_L and M_D in local earthquakes is consistent with the regression line derived in Shin
210 et al. (1993) (see S3 in Supplement; Fig. S5).

To mitigate the hazards caused by RSFs, rapid determination of source volume is essential for making emergency
responses. We first build an empirical relation of $\text{Log}(V)=1.12M_L+3.08$ as shown in Fig. 5c. The ASL method in the GeoLoc
location process can provide the seismic amplitude at the event source (A_0), which is an additional parameter in estimating
event size. Before exploring the relationship between V and A_0 , a test was conducted to investigate the influence of location
215 uncertainty on the A_0 value. After making the amplitude correction of A_0 for the specific events (see S4 Supplement), we
further established a simple power scaling of $V=77,290A_0^{0.44}$ with a linear correlation coefficient (R) of 0.68 (Fig. 5c) and A_0
ranging from 1.60×10^{-5} to 6.61×10^{-2} cm/s (Table S1). However, the volume estimate from the two scalings could be
underestimated because both M_L and A_0 were derived based on the peak amplitude. We expected that M_L and A_0 were
sensitive to the moment of the highest energy release, such as the most significant boulder impact from a sequence of
220 rockfall or the rock mass impact on the slope/road from the toppling event, which cannot represent the entire process. Thus,
the estimation from M_L - V and A_0 - V offer the lower bound for total volume loss.



Another parameter α is linked to the seismic energy lost due to attenuation along with wave propagation. We collected the α values from three events (Table S4), where their ASL results yielded the location uncertainty threshold. The result indicates that the attenuation is more rapid in the Sinwulyu catchment than Liwu catchment due to the geological background (see S4 in Supplement).

4.3 Physical process

Most of the RSFs were recorded by cameras and/or documented by news reports (Table S2), which provided an advanced understanding of the relation between the physical processes and the associated seismic signals. Based on events with a comprehensive video of the above observations, we can classify physical processes due to their different behaviors: (i) fast and large mass sliding, (ii) complex interactions between the rock mass and propagation surface, and (iii) intact rock detached from the cliff. For Event S4, a video camera captured the phases corresponding to the falling, bouncing, fragmenting, and impacting of multiple rock boulders during the initial stage. Approximately 19 seconds later, debris rapidly slid downward and deposited on the slope and road. At the termination stage, a few boulders fell. Before the comparison between the seismic signals and video, we collect the spectrogram from the closest station (ELDB; epicentral distance is 1.26 km) for Event S4 and find the time point (19 seconds in the video shown at the top of Fig. 6a to UTC 7:03:31) associated with the strongest PSD values. We assume that rapid debris mass sliding contributes to stronger PSD amplitudes. During initiation and termination, a relatively weak PSD amplitude is observed at frequencies lower than 2 Hz. Similarly, in the beginning, the video of Event N1 shows a rock mass sliding down from the scarp continuously, which can redistribute stress acting on the sliding surface. Finally, the large mass moves rapidly downward. Again, we align the timing (24 seconds in the video to UTC 01:08:39) of the peak PSD value with the large mass movement inferred from the video. The closest station, YHNB, is 8.7 km from Event N1. Indeed, high-frequency signals decay rapidly with increasing propagation distance, resulting in seismic energy with a frequency content below 10 Hz and a short signal duration of 15 seconds. We also found that SW02 for Event S4 with an epicentral distance of 7.70 km exhibits a similar spectrogram pattern (Fig. 3) to YHNB (Fig. S4). We can demonstrate that the signals from stations at greater epicentral distances cannot capture the event's full process, leading to discrepancies between the event durations detected by the video and the seismic records. In the case of a small-sized event (Event S6), there is no visible lower-frequency signal (< 2 Hz) observed at the nearest station, SW02 (Fig. 6d). Thus, only large mass sliding (MS) can cause a relatively low frequency of 1-3 Hz (MS shown in Figs. 6a and 6b), which coincides with the findings of a recent landslide study (Zhang et al., 2020). The interaction of the rock mass (IRM) acting on the slope favors the generation of higher frequencies (> 3 Hz; Deparis et al., 2008; Zimmer et al., 2012; IRM as shown in Figs. 6a, 6b, and 6d). Temporal changes in mass removal related to the aforementioned physical processes usually exhibit the V-shaped spectrogram (Figs. 6a and 6d) observed by the nearby stations.

For Event S2, we align the timing (57 seconds in the video to UTC 08:43:27) of the peak PSD value with the impact inferred from the video. The video shows apparent crack nucleation before the toppling. In the beginning, the leading



seismic phase of 2 Hz is associated with the intact rock being detached from the cliff (white box shown in Fig. 6f), which
255 may correlate to the seismic response from the hillslope. This leading phase could easily be detected in the slope-scale
monitoring of rockfall (Roy et al., 2019). The total duration associated with the detachment to deposition of approximately
16 seconds is consistent with the signal duration identified from the spectrogram of station ELDB (50 to 66 seconds in the
video shown in Fig. 6f). Notably, compared to the spretrogram for the sliding-dominant behavior, that for the toppling
process exhibits a column shape (T phase shown in 3f), showing a wide range of frequencies. Similarly, Event M3, which
260 corresponds to the detachment and impact mechanism (e.g., an overhanging rockfall whose impaction behavior is similar to
toppling), also creates column-shaped spectrograms (Fig. 6c). For the two smallest RSFs (Events S5 and M2) without video,
we also conducted a combined analysis based on spectrograms and field photos, and we found that the pulse-like
spectrogram features can be linked to the impacts of small-to-large sized boulder masses (see S5 in Supplement)

In summary, seismic signals can provide an additional constraint on source physical processes, but they are
265 influenced by the magnitude of the source and the source-to-station distance, which controls the radiation and attenuation of
seismic waves. Rapid, massive sliding events with volumes above 5,000 m³ show a specific seismic phase of MS.
Furthermore, the complex interaction of a sliding rock mass exhibits relatively high-frequency signals, which is termed the
IRM phase. The transition zone between IRM and MS is approximately 2-3 Hz. IRM can be over 20 seconds on the volume
scale of larger than 2,000 m³, corresponding to the farthest epicenter distance of ~2.58 km. Moreover, V-shaped
270 spectrograms are induced by the combination of IRM and MS phases, which could be detected only by the closer stations.
For an event acting with the toppling process and/or impact-dominant mechanism, the giant boulder mass directly impacts
the ground and exhibits column-shaped spectrograms, which are up to 30 Hz (T phase). Our simple typology of physical
processes based on seismic features in signal duration and frequency content recorded by the closer station (epicenter
distance less than 2.5 km) is summarized in Fig. 6e. Indeed, our typology is unavailable when the distance is larger than 2.5
275 km. For example, the V-shaped spectrogram feature cannot be captured by the Station YHNB for the Event N1 with MS
behavior.

4.4 GeoLoc scheme applied for rapid report

To test how the GeoLoc scheme can provide a rapid report, an event that occurred at 01:09 on 12th June 2020
280 (UTC) was used. This event was only recorded by the BATS seismic station of TDCB (the epicentral distance of ~600 m).
The seismic signals of a closer station would help evaluate the feasibility of making source classification and volume
estimation and understanding the event's physical process. With a priori knowledge of source location, we directly compute
the seismic magnitude. The result shows the M_L and M_D of 0.36 and 2.75, respectively. A M_L/M_D of 0.13 can yield
successful source identification using the threshold of 0.85 proposed in this study. Furthermore, we utilize the peak
285 amplitude of 1.09×10^{-3} cm/s recorded by Station TDCB to be A_0 -value for the volume estimation. Application of two



regression scaling relations derived in this study (Fig. 5c and 5d) yield the source volumes (V) of 3,838 m³ and 3,019 m³, respectively, roughly consistent with the preliminary volume of 5,142 m³ estimated from the digital surface model (Fig. 7a).

Three-component spectrograms from the Station TDCB are shown in Fig. 7b. Based on our simple typology of the physical process, the spectrogram of the TDCB was used, and its physical process can be divided into three parts: (i) the pulse-like features can be observed during the period from 01:09:25 to 01:09:38 (green rectangle in Fig. 7b), corresponding to multiple rockfalls. (ii) the emergent column-shape spectrogram (01:09:38 to 01:09:45 in Fig. 7b) relates to the rock toppling process with mass impacting and/or impact of the boulder rock mass. Finally, the process turned to the complex interactions between the fragmented rock mass and propagation surface with the PSD dominating over 2 Hz of the IRM phase.

To examine the aforementioned physical processes, we obtain the video released by the DGH. At the beginning of the video, the motion type of the rock mass includes rolling, bouncing, and impacting the hillslope and road surface in the first 15 seconds of the video. Then, the massive rock mass topples (18 seconds, Fig. 7c) and hits the slope (19 seconds), and finally raises a cloud of dust (after 19 seconds). After aligning the time point (19 seconds in the video to UTC 01:09:42) of the peak PSD value with the significant impact inferred from the video, the above spectrogram features are consistent with the motion behaviors extracted from the video, except for the IRM phase. Based on the photos captured by the drones (Fig. 7a), the run-out distance is around 200 m, which implies the mass material continued to move rather than just stop, so it generated a continuous signal of 50 seconds.

Notably, the real-time broadband waveforms from 5 stations (CLAB, XAMB, WLUB, ELDB, SYNB shown in Fig. 1) distributed along the southern provincial highway and one station (YULB) outside the Sinwulu catchment, are ready for real-time implementation. Based on the flowchart of the GeoLoc scheme shown in Fig. 2, we first fixed a bandpass filtering of 1-8 Hz, which can be applied to most events in this catchment, except for one single boulder impaction (Event S5). Certain thresholds of M_L/M_D (0.85) and propagation distance (10 km; see Fig. S8) are used to ensure successful source discrimination. Two scaling lines established in this study are available for rapid volume estimation. However, manual checks are still needed to obtain the signal duration (required in calculating M_D) and physical process, which can easily be automatized by machine-learning-based classification approaches. Since June 2020, the GeoLoc-based monitoring system has been in operation online and is under testing.

5. Conclusions

The GeoLoc scheme has been developed to successfully study ten RSFs by using the seismic signals from permanent and temporary seismic networks, providing estimations of the location and associated seismic parameters, namely, A_0 , α , M_L and M_D . For the source discrimination, a certain threshold of the M_L/M_D of 0.85 can essentially classify the sources of RSFs and earthquakes. We further built two regression equations for the $V-A_0$ and $V-M_L$ relations, which are crucial for estimating the lower bound of source volume after an event occurrence. By analysing the videos and seismic



signals from the nearest station with epicenter distance of less than 2.5 km, we can comprehensively understand the main
320 physical processes that control the seismic signals' features. For example, the characteristics in spectrograms induced by the
multiple rockfalls, the impaction of boulder mass (similar to toppling), and the complex interactions between the rock mass
and propagation surface exhibit pulse-like, column-shaped, and V-shaped features, respectively.

In practice, for the events with location quality levels A and B, we can provide information on the source location,
volume estimate, and physical process within a short time. For the events with quality level C, only the physical process
325 from the spectrogram features can be retrieved. The result of this research is vital for the government to make effective
emergency responses after an RSF occurrence. Rapid estimation of location and volume would be helpful for effective road
control and hazard management. The physical process also delivers a useful message to engineering geologists for better
understanding the failure mechanisms of RSFs and for designing slope protection plans. Before implementing the GeoLoc
scheme in real-time, a detailed geological survey is necessary for better understanding potential failure mechanisms and
330 highlighting high-risk slopes. Currently, the GeoLoc scheme shown in Fig. 2 has already been adopted in the Sinwulyu
catchment, which is a high-risk area of RSFs in Taiwan, and it could be readily applied in other places with high RSF
activities, such as the Alps in Europe, the Southern Alps in New Zealand, Yosemite National Park in America, etc. as well.

Conflict of Interest

335 The authors declare that they have no conflict of interest.

Dataset Availability

Waveform data for this study are provided by the Broadband Array for Seismology in Taiwan (BATS, doi:10.7914/SN/TW)
and Central Weather Bureau (CWB), Taiwan. The raw seismic data of the temporal network used in this study are available
340 through Figshare at this site: <https://doi.org/10.6084/m9.figshare.12203258> and the video record of the event on 12th June
2020 at <https://doi.org/10.6084/m9.figshare.13168427.v1>. The Digital Elevation Model (DEM) of Taiwan is from
Government Open Data Platform, Taiwan at the site: <https://data.gov.tw/dataset/35430>.

Author contribution

345 JM performed the seismic data analysis and location inversion. WA developed the hybrid method (GeoLoc) and assisted in
implementing the location inversion. JM and WA deployed and maintained the seismic array. H helped to co-ordinate the
deployment of seismic array. YT and CM conducted a series of the field works for RSF events. All authors contributed to the
dataset compilation, interpretation and the writing of this paper.

Acknowledgments, Samples, and Data

This research was supported by the Ministry of Science and Technology (MOST) grant MOST 108-2636-M-009-005 (the
Young Scholar Fellowship Einstein Program), and partly financially supported from the Central Geological Survey (CGS),
MOEA, grant Project number: B10923, the Soil and Water Conservation Bureau grant SWCB-109-11-1-01-0001(21) and the
Academia Sinica grant AS-TP-108-M08 and the Higher Education Sprout Project of the National Chiao Tung University and
355 Ministry of Education (MOE), Taiwan. The authors acknowledge the Sinotech Disaster Prevention Technology Research



Center to provide the data of failure volume of the Event N1, Directorate General of Highways (DGH), Taiwan for the Rockfall inventory, field photo and, video and, CWB for the earthquake inventory.

References


- 360 Aki, K. and Ferrazzini, V.: Seismic monitoring and modeling of an active volcano for prediction. *J. Geophys. Res.*, 105, 16617–16640. <https://doi.org/10.1029/2000JB900033>, 2000.
- Chao, W.A., Wu, Y.M., Zhao, L., Chen, H., Chen, Y.G., Chang, J.M. and Lin, C.M.: A first near real-time seismology based landquake monitoring system. *Sci. Rep.*, 7:43510. <https://doi.org/10.1038/srep43510>, 2017.
- Chen C.H., Chao, W.A., Wu, Y.M., Zhao, L., Chen, Y.G., Ho, W.Y., Lin, T.L., Kuo, Y.T., Chang, J.M.: A seismological study of landquakes using a real-time broadband seismic network. *Geophys. J. Int.*, 194(2), 885–898, 365 <https://doi.org/10.1093/gji/ggt121>, 2013.
- Crespi, J.M., Chan, Y.C. and Swaim, M.S.: Synorogenic extension and exhumation of the Taiwan hinterland, *Geology*, 24, 247–250, [https://doi.org/10.1130/0091-7613\(1996\)024%3C0247:SEAEOT%3E2.3.CO;2](https://doi.org/10.1130/0091-7613(1996)024%3C0247:SEAEOT%3E2.3.CO;2), 1996.
- Dammeier, F., Moore, J.R., Haslinger, F. and Loew, S.: Characterization of alpine rockslides using statistical analysis of seismic signals. *J. Geophys. Res. Earth Surf.*, 116, F04024, <https://doi.org/10.1029/2011JF002037>, 2011.
- 370 Deparis, J., Jongmans, D., Cotton, F., Baillet, L., Thouvenot, F., & Hantz, D.: Analysis of rock-fall and rock-fall avalanche seismograms in the French Alps. *Bull. Seismol. Soc. Am.*, 98, 1781–1796, <https://doi.org/10.1785/0120070082>, 2008.
- Dietze, M., Turowski, J.M., Cook, K.L. and Hovius, N.: Spatiotemporal patterns, triggers and anatomies of seismically detected rockfalls. *Earth Surf. Dynam.*, 5, 757–779, <https://doi.org/10.5194/esurf-5-757-2017>, 2017
- Ekström G. and Stark, C.P.: Simple scaling of catastrophic landslide dynamics. *Science*, 339(6126):1416–1419, 375 <https://doi.org/10.1126/science.1232887>, 2013.
- Fuchs, F., Lenhardt, W., Bokelmann, G. and the Alp Array Working Group.: Seismic detection of rockslides at regional scale: Examples from the Eastern Alps and feasibility of kurtosis-based event location. *Earth Surf. Dynam.*, 6, 955–970, <https://doi.org/10.5194/esurf-6-955-2018>, 2018.
- Helmstetter, A. and Garambois, S.: Seismic monitoring of Séchilienne rockslide (French Alps): Analysis of seismic signals and their correlation with rainfalls. *J. Geophys. Res. Earth Surf.*, 115, F03016, <https://doi.org/10.1029/2009JF001532>, 380 2010.
- Hibert, C., Mangeney, A., Grandjean, G., Baillard, C., Rivet, D., Shapiro, N.M., Satriano, C., Maggi, A., Boissier, P., Ferrazzini, V., Crawford, W.: Automated identification, location, and volume estimation of rockfalls at Piton de la Fournaise volcano. *J. Geophys. Res. Earth Surf.*, 119, 1082–1105, <https://doi.org/10.1002/2013JF002970>, 2014.
- 385 Hibert, C., Malet, J.P., Bourrier, F., Provost, F., Berger, F., & Bornemann, P., et al.: Single-block rockfall dynamics inferred from seismic signal analysis. *Earth Surf. Dynam.*, 5, 283–292, <https://doi.org/10.5194/esurf-5-283-2017>, 2017.
- Hungr, O., Leroueil, S. and Picarelli, L.: The Varnes classification of landslide types, an update. *Landslides*, 11 (2), 167–



- 194, <https://doi.org/10.1007/s10346-013-0436-y>, 2013.
- 390 Jones, G.A., Kulesa, B., Doyle, S.H., Dow, C.F. and Hubbard, A.: An automated approach to the location of icequakes
using seismic waveform amplitudes. *Ann. Glaciol.*, 54, 1–9, <https://doi.org/10.3189/2013AoG64A074>, 2013.
- Kao, H., Jian, P.R., Ma, K.F., Huang, B.S. and Liu, C.C.: Moment-tensor inversion for offshore earthquakes east of Taiwan
and their implications to regional collision. *Geophysical Research Letter*, 25, 3619–3622,
<https://doi.org/10.1029/98GL02803>, 1998.
- 395 Levy, C., Jongmans, D. and Baillet, L.: Analysis of seismic signals recorded on a prone-to-fall rock column (Vercors massif,
French Alps). *Geophysical Journal International*, 186, 296–310, <https://doi.org/10.1111/j.1365-246X.2011.05046.x>,
2011.
- Manconi, A., Picozzi, M., Coviello, V., de Santis, F. and Elia, L.: Real time detection, location, and characterization of
rockslides using broadband regional seismic networks. *Geophys. Res. Lett.*, 43, 6960–6967,
<https://doi.org/10.1002/2016GL069572>, 2016.
- 400 Ogiso, M. and Yomogida, K.: Estimation of locations and migration of debris flows on Izu-Oshima Island, Japan, on 16
October 2013 by the distribution of high frequency seismic amplitudes. *J. Volcanol. Geotherm. Res.*, 15–26,
<https://doi.org/10.1016/j.jvolgeores.2015.03.015>, 2015.
- Petley, D.: Geomorphological mapping for hazard assessment in a neotectonic terrain. *Geogr. J.*, 164, 183–201,
<https://doi.org/10.2307/3060369>, 1998.
- 405 Rössli, C., Walter, F., Husen, S., Andrews, L. C., Lüthi, M. P., Catania, G. A. and Kissling, E.: Sustained seismic tremors
and ice- quakes detected in the ablation zone of the Greenland ice sheet. *J. Glaciol.*, 60, 563–575,
<https://doi.org/10.3189/2014JoG13J210>, 2014.
- Roy, G.Le., Helmstetter, A., Amitrano, D., Guyoton, F. and Roux-Mallouf, R.Le.: Seismic analysis of the detachment and
impact phases of a rockfall and application for estimating rockfall volume and free-fall height. *J. Geophys. Res. Earth*
410 *Surf.*, 124, 2602–2622, <https://doi.org/10.1029/2019JF004999>, 2019.
- Saló, L., Corominas, J., Lantada, N., Matas, G., Prades, A., & Ruiz-Carulla, R.: Seismic energy analysis as generated by
impact and fragmentation of single-block experimental rockfalls. *J. Geophys. Res. Earth Surf.*, 123(1450), 78,
<https://doi.org/10.1029/2017jf004374>, 2018.
- Shin, T.C.: The Calculation of Local Magnitude from the simulated Wood-Anderson Seismograms of the Short-Period
415 *Seismograms in the Taiwan Area. Terr. Atmospheric Ocean. Sci.*, 4, 155–170,
[https://doi.org/10.3319/TAO.1993.4.2.155\(T\)](https://doi.org/10.3319/TAO.1993.4.2.155(T)), 1993.
- Suriñach, E., Vilajosana, I., Khazaradze, G., Biescas, B., Furdada, G. and Vilaplana, J.M.: Seismic detection and
characterization of landslides and other mass movements. *Nat. Hazards Earth Syst. Sci.*, 5(6), 791–798,
<https://doi.org/10.5194/nhess-5-791-2005>, 2005.
- 420 Varnes, D. J.: Slope movements: Types and processes, in *Landslide Analysis and Control*, edited by R. L. Schuster and R. J.



- Krizek, Spec. Rep. 176, pp. 11 – 33, Transp. Res. Board, Natl. Acad. Sci., Washington, D. C., 1998.
- Vilajosana, I., Suriñach, E., Abellán, A., Khazaradze, G., Garcia, D. and Llosa, J.: Rockfall induced seismic signals: Case study in Montserrat, Catalonia. *Nat. Hazards Earth Syst. Sci.*, 8, 805–812. <https://doi.org/10.5194/nhess-8-805-2008>, 2008.
- 425 Walter, F., Burtin, A., McArdell, B. W., Hovius, N., Weder, B. and Turowski, J. M.: Testing seismic amplitude source location for fast debris-flow detection at Illgraben, Switzerland. *Nat. Hazards Earth Syst. Sci.*, 17(6), 939–955, <https://doi.org/10.5194/nhess-17-939-2017>, 2017.
- Wu, Y.M., Chang, C.H., Zhao, L., Shyu, J.B.H., Chen, Y.G., Sieh, K. and Avouac, J.P.: Seismic tomography of Taiwan: improved constraints from a dense network of strong-motion stations. *J. Geophys. Res.-Sol. Ea.*, 112, B08312, <https://doi.org/10.1029/2007JB004983>, 2007.
- 430 Zhang, Z., He, Z. and Li, Q.: Analyzing high-frequency seismic signals generated during a landslide using source discrepancies between two landslides. *Eng. Geol.*, 272, 105640, <https://doi.org/10.1016/j.enggeo.2020.105640>, 2020.
- Zimmer, V.L., Collins, B.D., Stock, G.M. and Sitar, N.: Rock fall dynamics and deposition: An integrated analysis of the 2009 Ahwiyah Point rock fall, Yosemite National Park, USA. *Earth Surf. Process.*, 37(6), 680–691, <https://doi.org/10.1002/esp.3206>, 2012.
- 435 Zimmer, V.L. and Sitar, N.: Detection and location of rock falls using seismic and infrasound sensors. *Eng. Geol.*, 193, 49–60, <https://doi.org/10.1016/j.enggeo.2015.04.007>, 2015.

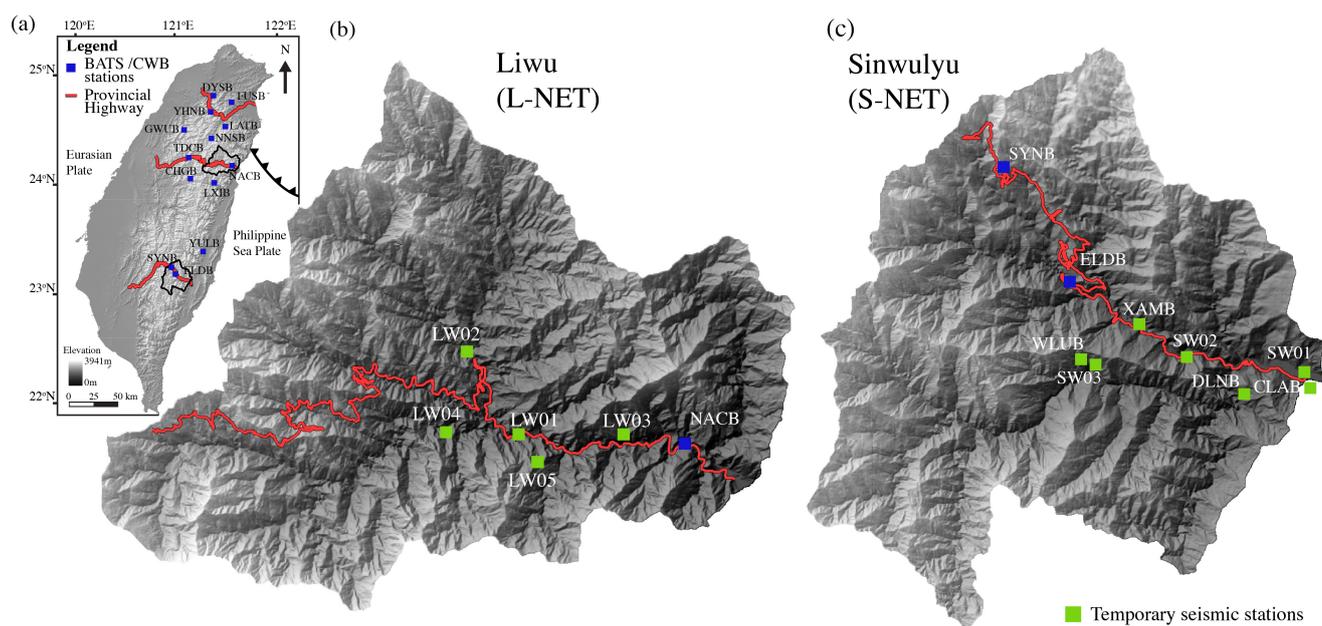

440



Figure 1. Research area and distribution of seismic stations. (a) Topographic map of Taiwan shows three provincial highways (red lines) and BATS/CWB stations (blue square). (b) Liwu catchment, the east flank of the central provincial highway, and the temporary seismic network (L-NET, green square). (c) Sinwulyu catchment, the east flank of the southern provincial highway, and the temporary seismic network (S-NET, green square). The data of Digital Elevation Model (DEM) of Taiwan and two catchments are from Government Open Data Platform, Taiwan.

GeoLoc Scheme


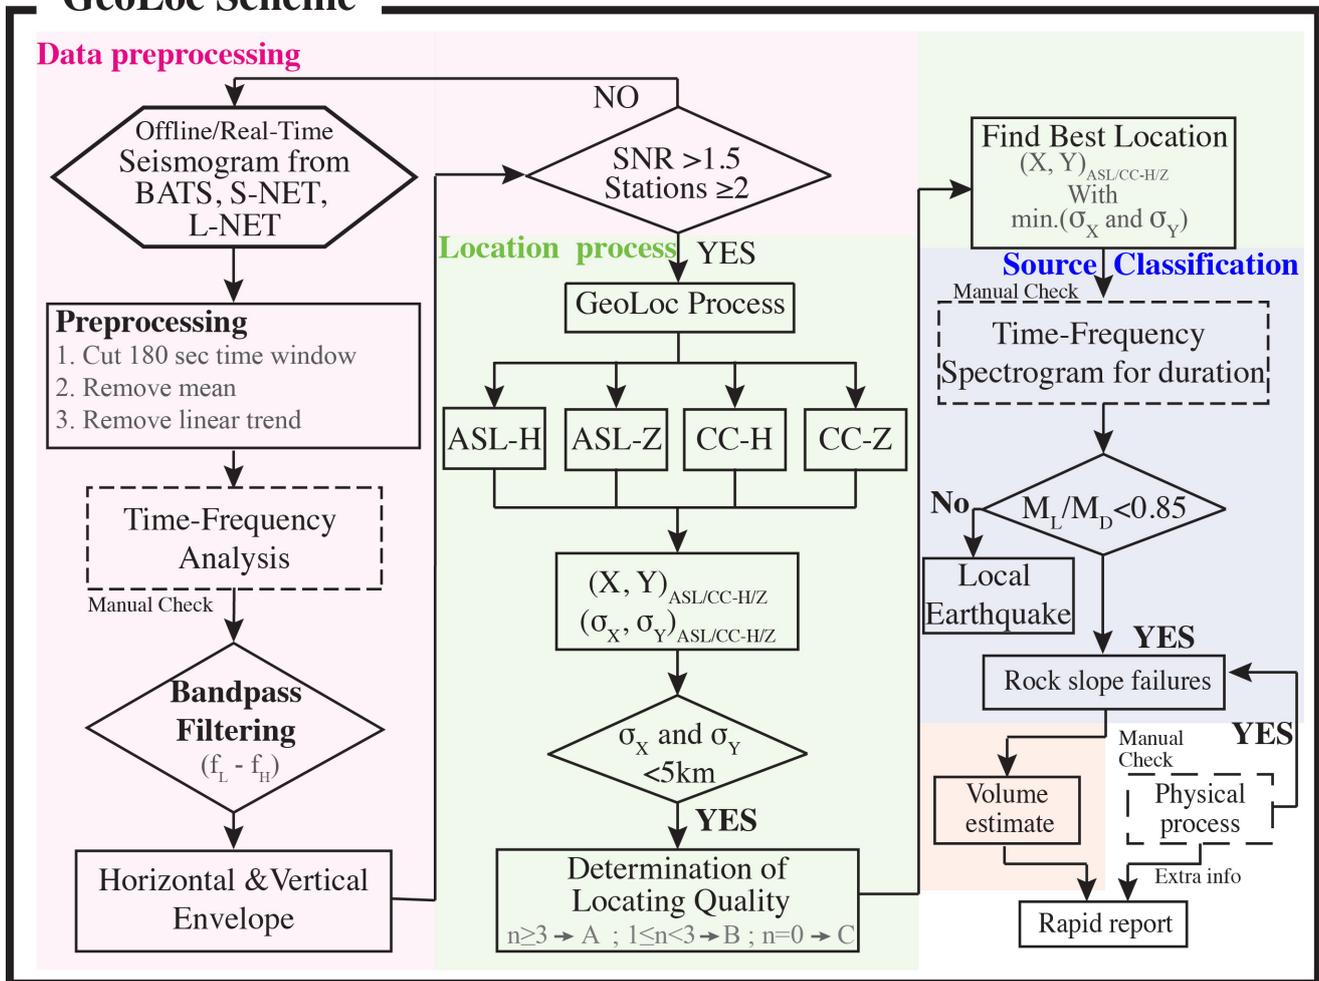


Figure 2. Flowchart of the GeoLoc scheme, including data preprocessing, location process, source classification, and volume estimate. All steps are automatic, except the steps with rectangular dashes which involved manual check in this research. f_L and f_H are the lower and upper band of the bandpass filtering. $(X, Y)_{ASL/CC-H/Z}$ is the best location form the ASL or CC with horizontal or vertical components. $(\sigma_X, \sigma_Y)_{ASL/CC-H/Z}$ are those location uncertainties based on the relative fitness over 0.95. n is the number of methods with components (total: $n=4$) whose location error less than 5 km threshold. The result with minimum location error defines the best location.



S4 4th October 2016 07:03:10 (UTC)

Location: 121.028°E 23.176°N Volume: 21,000 m³

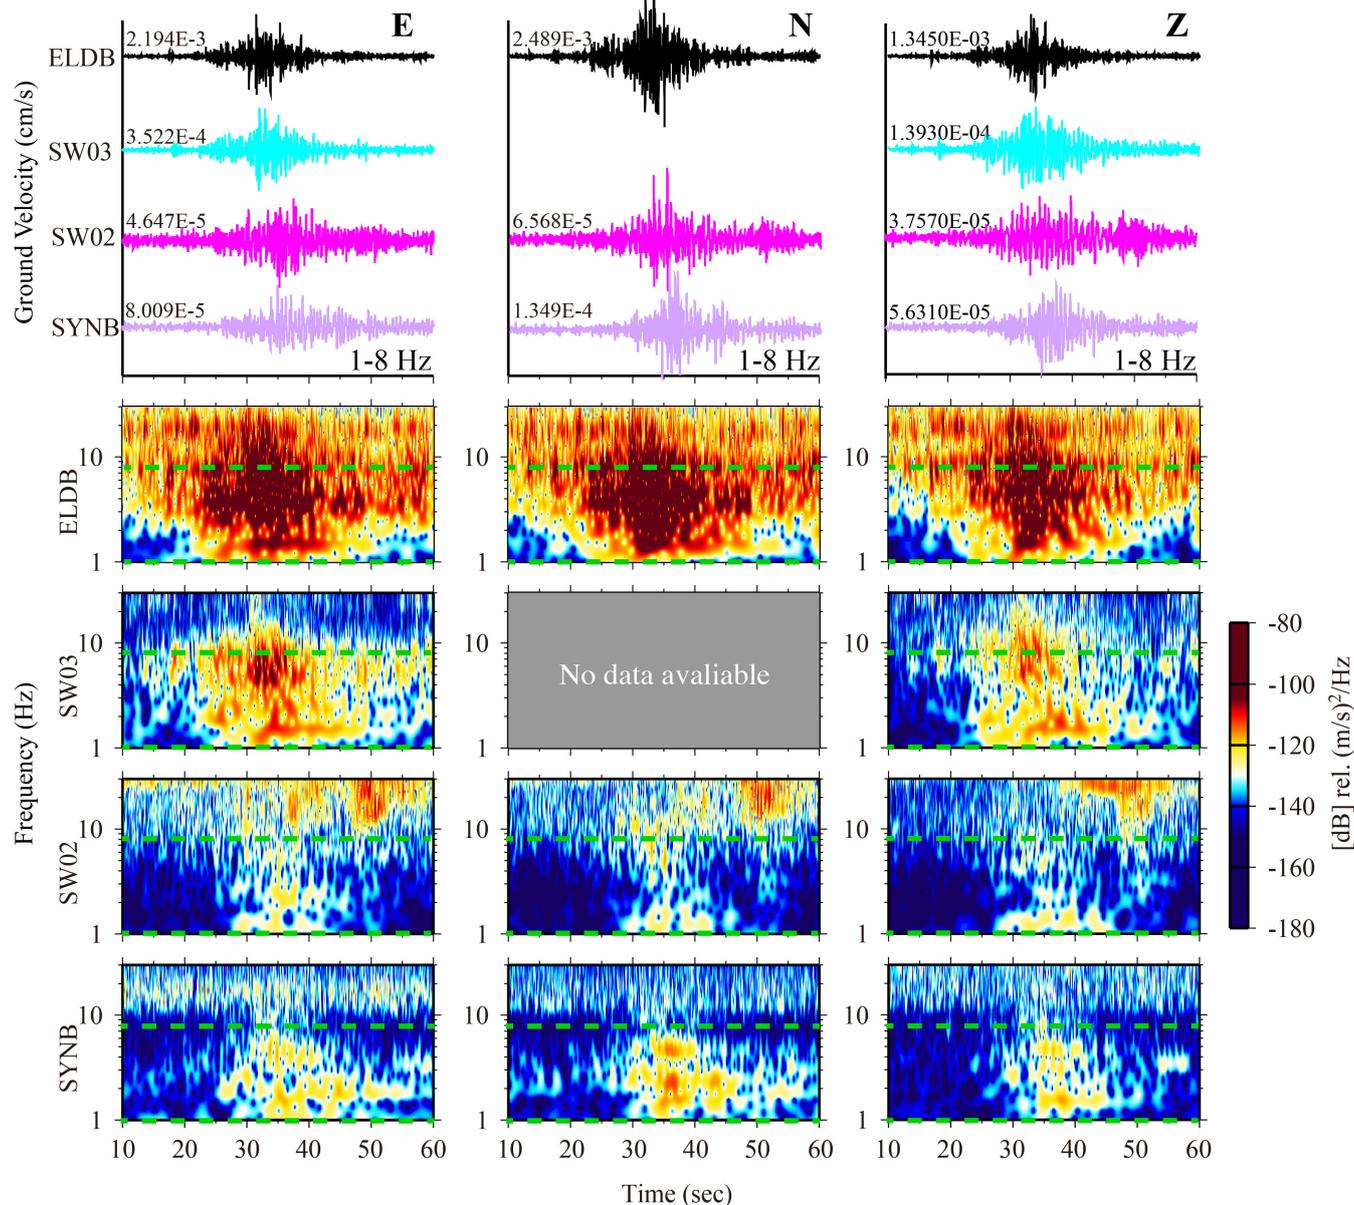

455 **Figure 3.** Recorded waveform and spectrogram of Event S4. The green dashed line is the range of the bandpass filter, which should cover the signals of all stations recorded during the event.

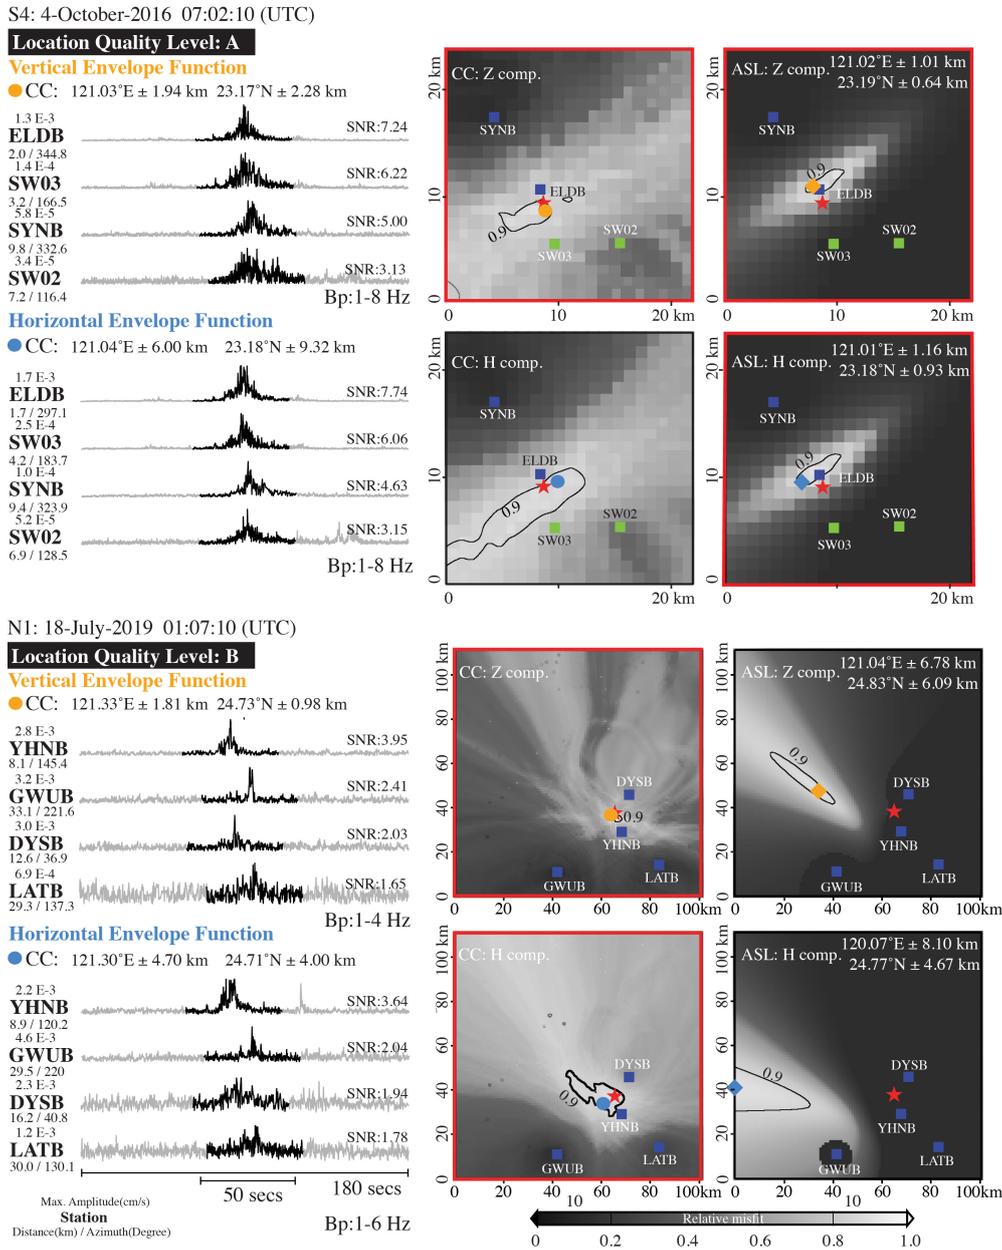


Figure 4. The result of CC and ASL in Events S4 and N1. The left panel is the horizontal and vertical envelope function of the detected stations of the Events S4 and N1. The black lines with 50-second signals are used in the CC. The right panel is the result of the CC and ALS with a horizontal and vertical component. The circle and diamond symbols present the best result of the CC and ASL, respectively. The black lines are the contour of a relative misfit with 0.9. The uncertainty of the location is estimated based on the standard deviation of longitude and latitude for the source grid points with the relative misfit higher than 0.95. The red frames highlight the results satisfying the threshold of location uncertainty of 5 km.



465


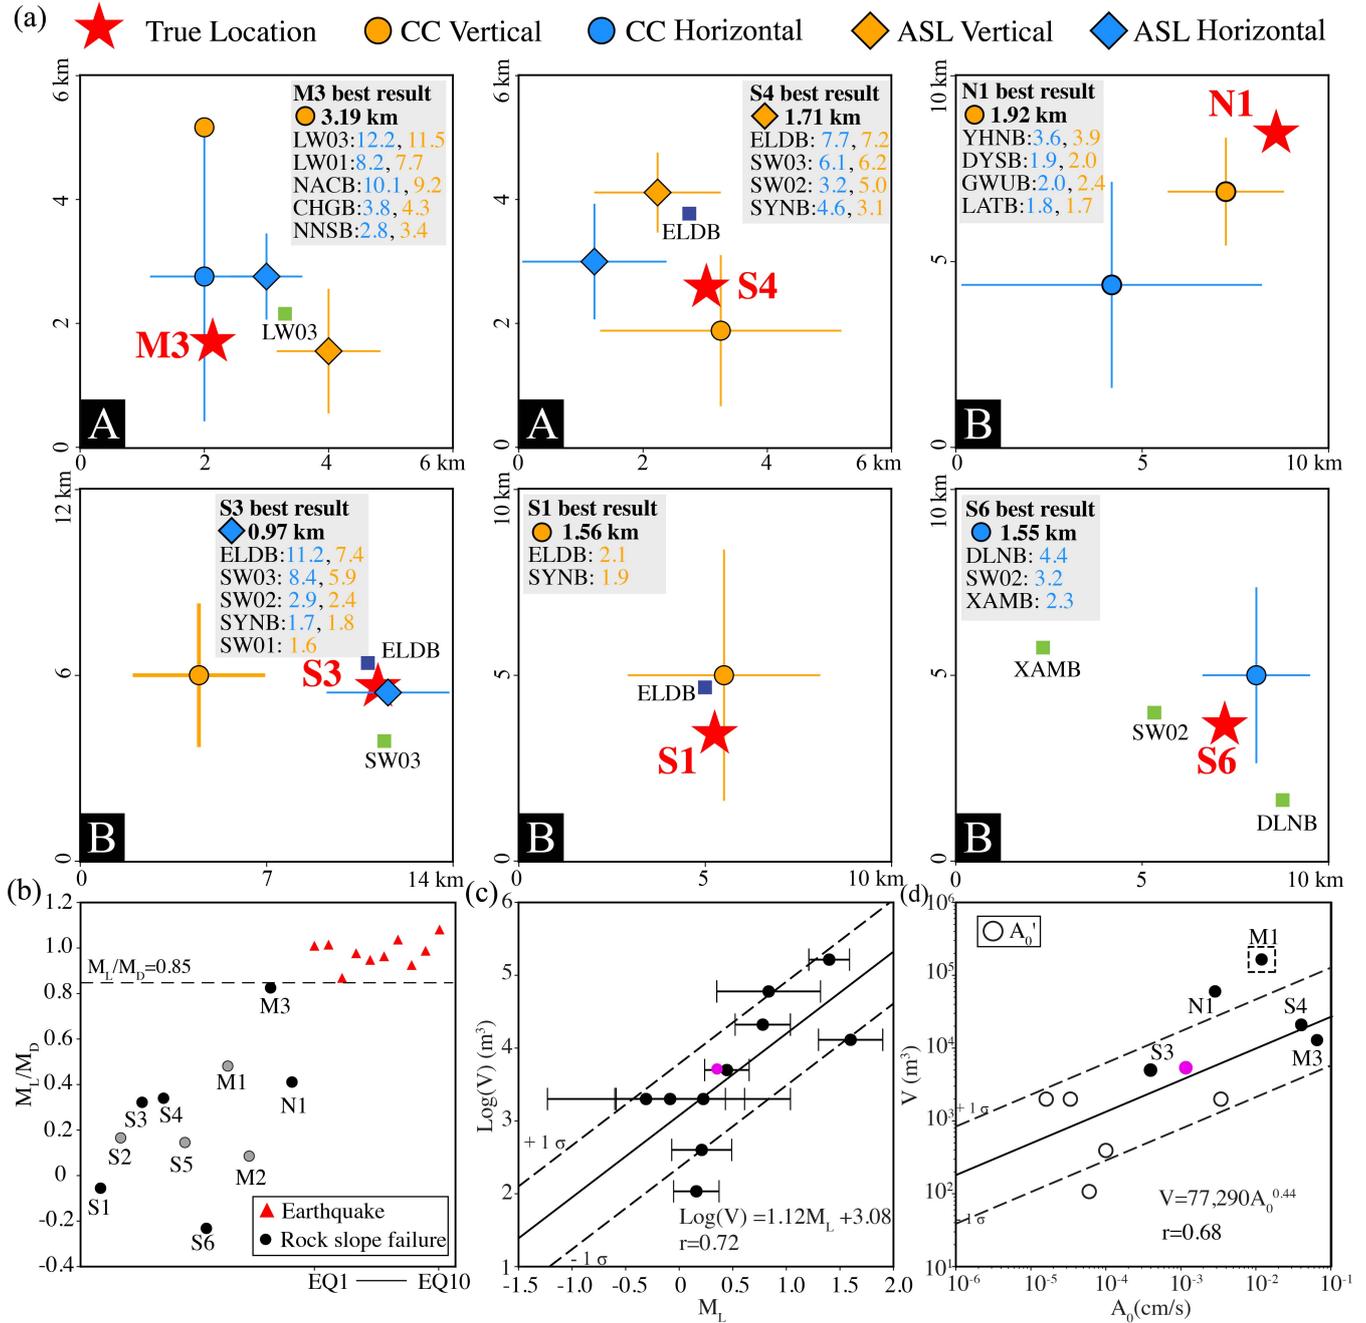


Figure 5. Results of the location process by the GeoLoc scheme, M_L/M_D of the RSFs and earthquakes, scaling of seismic parameters, and source volumes. (a) Results of location quality levels A and B from GeoLoc and their location uncertainties.


470 The number beside the station name shown in the upper right corner is the SNR value for the horizontal (blue) and vertical



(orange) envelopes. The circle and diamond symbols are the results of CC and ASL, respectively. The symbol in the grey box is the best result of location, and the value beside the symbol indicates the location error. (b) The black and grey circles are the RSFs with quality levels A and B, and C, respectively. Red triangles show the results of M_L/M_D for earthquakes. A horizontal dashed line indicates a threshold of M_L/M_D of 0.85 used in this study. The relationships of (c) the event volume (V) and M_L , and (d) the event volume (V) and A_0 . The black circles show the A_0 extracted from the best location result. The open circles are the peak ground velocity (A_0'), extracted from the nearest stations. Event M1 is excluded in regression analysis due to its high location error. The purple circle is the recent event on the 12th of June 2020.

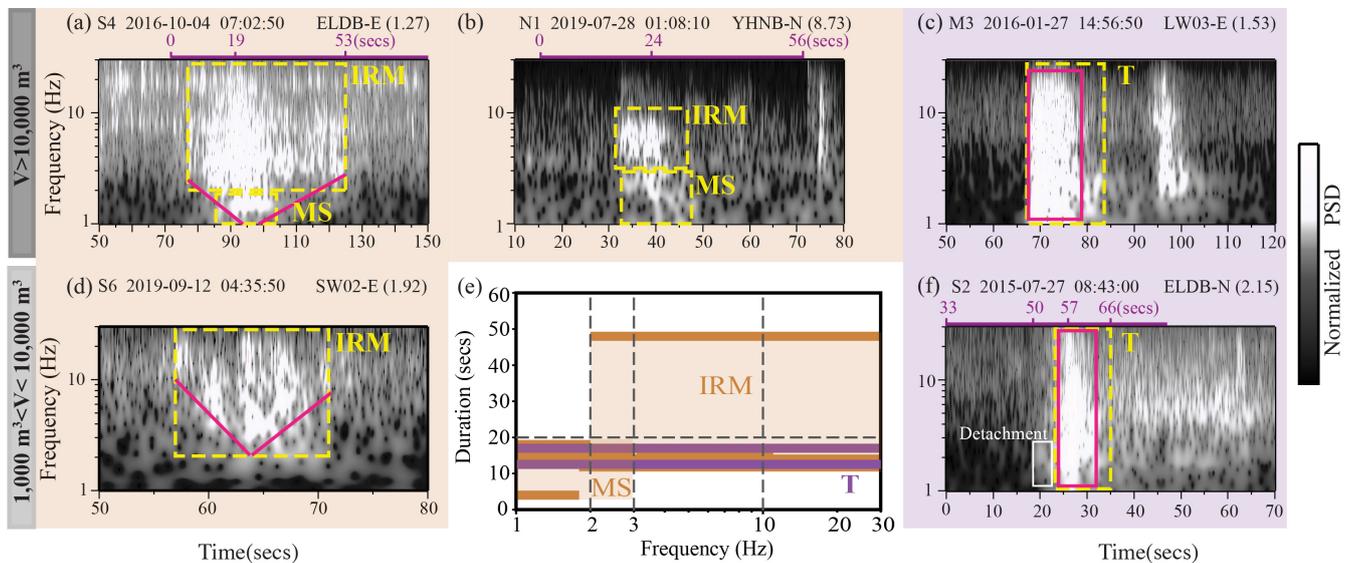

480 **Figure 6.** Spectrogram of five events and classification of physical processes by spectrogram features, frequency, and
 485 duration. The rows are separated for the different scales of failure volumes. (a-d, f) Spectrograms of different events. The top
 left corner is the event number and the starting time of the x-axis. The top right corner is the station name with the
 component and the epicentral distance (km). The purple bars above (a), (b), and (f) are the durations (secs) of the video with
 the time points (Table S2). The yellow dashed rectangle is selected for analyzing the range of frequencies and duration for
 (e). The pink lines are the distinct features of the sliding (IRM and MS) and toppling (T) processes. (e) Sliding and toppling
 processes are distinguished by the frequency and event duration.

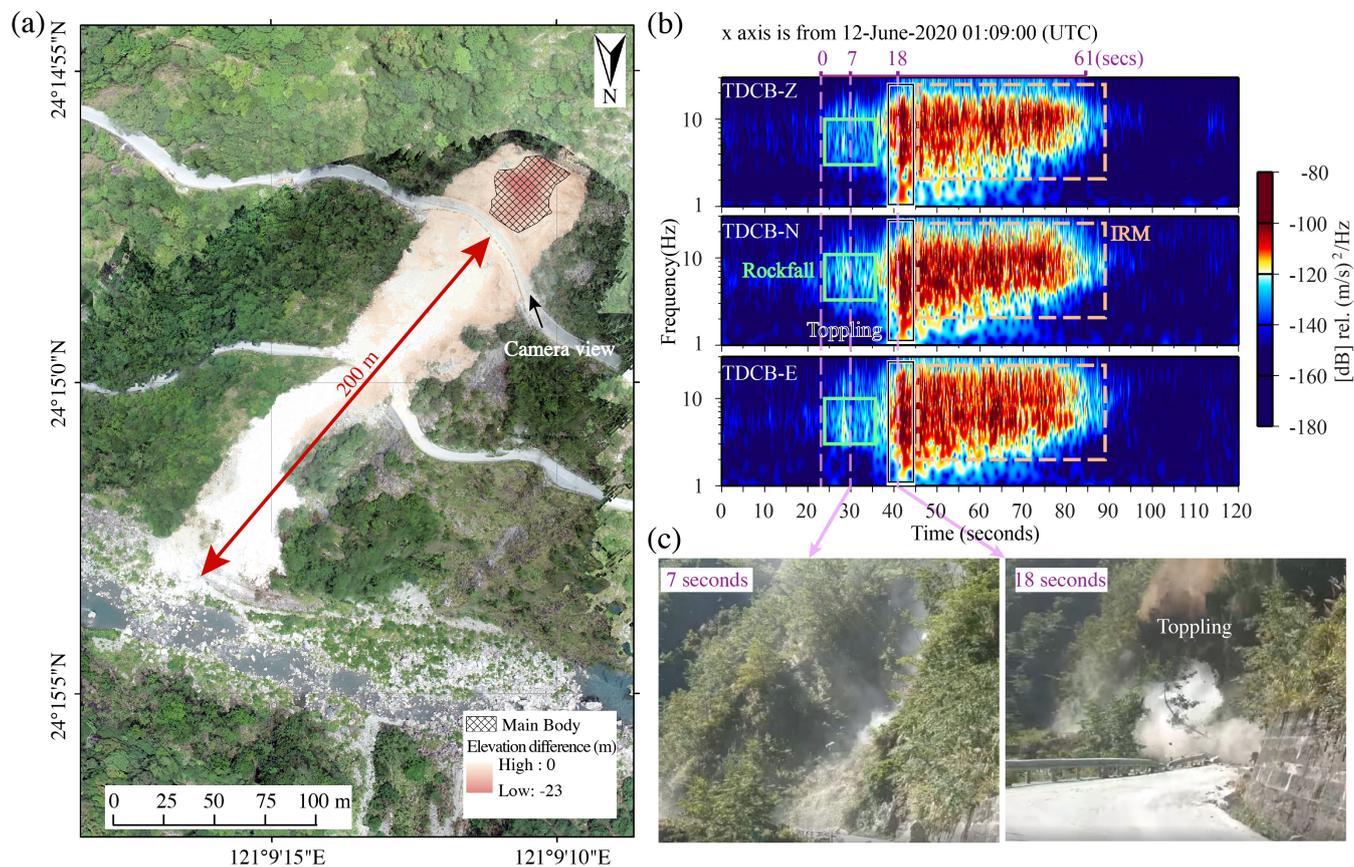

490 **Figure 7.** The field photo, spectrograms, and time-lapse photos from the video of recent RSF on the 12th of June 2020. (a)
 Field photo of the event. The red color scale is the elevation difference between DEM originating from Lidar in 2012 and,
 the digital surface model(DSM) derived from drone survey after the event. The main body is considered the elevation
 difference larger than 3m. The black arrow indicates the camera view, and the red arrow is the distance between the road and
 495 river bed. (b)The spectrograms of three components. The upper left corner of the spectrograms is the station name with the
 components. The green, white with black lines, and orange rectangles are the spectrogram features of the physical process
 corresponding to rockfall, toppling (T phase), and complex process of the rock interaction with slope (IRM phase),
 respectively. The vertical purple dashed line indicates the time points from the video. (c) Time-lapse photos from the video
 corresponding to the physical process of rockfall (Left panel) and toppling (Right panel). The seconds shown in the top-left
 corner indicate a time tag in the video.

500