

Sand mining far outpaces natural supply in a large alluvial river

Christopher R. Hackney¹, Grigorios Vasilopoulos², Sokchhay Heng³, Vasudha Darbari², Samuel Walker², Daniel R. Parsons²

¹ School of Geography, Politics and Sociology, Newcastle University, Newcastle upon Tyne, NE1 7RU, UK

5 ² Energy and Environment Institute, University of Hull, Hull, UK, HU6 7RX

³ Institute of Technology of Cambodia, Phnom Penh, Cambodia

Correspondence to: Christopher R. Hackney (christopher.hackney@ncl.ac.uk)

Abstract The world's large rivers are facing reduced sediment loads due to anthropogenic activities such as hydropower development and sediment extraction. Globally estimates of sand extraction from large river systems ~~is are~~ lacking, in part due to the pervasive and distributed nature of extraction processes. ~~In the Mekong River, current basin wide estimates of sand extraction are 50 Mt, and based on estimates from 2013. For the Mekong River, the widely assumed estimate of basin-wide sand extraction is 50 Mt a year. This figure is based on 2013 estimates and is likely to be outdated.~~ Here, we demonstrate the ability of high-resolution satellite imagery to map, monitor and estimate volumes of sand extraction on the Lower Mekong River in Cambodia. We use monthly composite images from PlanetScope imagery (5 m resolution) to estimate sand extraction volumes over the period 2016 – 2020 ~~through tracking sand barges. We and~~ show that rates of extraction have increased ~~year on year on a yearly basis~~ from 24 Mt (17 Mt to 32) in 2016, to 59 Mt (41 Mt to 75 Mt) in 2020 at a rate of ~8 Mt yr⁻¹ (6 Mt yr⁻¹ to 10 Mt yr⁻¹); where values in parenthesis relate to lower and upper error bounds, respectively. Our revised estimates for 2020 (59 Mt) are nearly two times greater than previous best estimates for sand extraction for Cambodia (32 Mt) and greater than current best estimates for the entire Mekong Basin (50 Mt). We show that over the five year period, only two months have seen positive (supply exceeds extraction) sand budgets under mean and upper bound scenarios (five months under the lower bound estimates). We demonstrate that this net negative sand budget ~~to the river~~ is driving major ~~reach-wide~~ bed incision with a median rate of -0.26 m a⁻¹ over the period 2013 to 2019. The use of satellite imagery to monitor sand mining activities provide a low-cost means to generate up-to-date, robust estimates of sand extraction in the world's large rivers that are needed to underpin sustainable management plans of the global sand commons.

1 Introduction

The world's rivers transport ~37,000 km³ of water (Dai and Trenberth, 2002) and ~19 billion tonnes of sediment and minerals (Milliman and Farnsworth, 2011) to the global oceans each year. Over the past century, anthropogenic pressures associated with population growth, urbanisation and economic development have seen an increase in the demand for the natural resources river systems provide (Best, 2019; Best and Darby, 2020). In particular, the demand for sand and gravel from rivers has seen

unprecedented growth ~~in the past two to three decades since the 1970s~~ (Peduzzi, 2014; [Miatto et al., 2017](#); Torres et al., 2017), with demand now outstripping supply (Bendixen et al., 2019). ~~Estimates indicate that T~~today, at a ~~minimum~~minimum, between 32 and 50 billion tonnes of aggregates are extracted globally every year (Koehnken and Rintoul, 2018). The environmental impacts of such high extraction rates are being felt around the world (Koehnken et al., 2020); with impacts manifest as river bank instability (Hackney et al., 2020), changes in riverine biodiversity (Bhattacharya et al., 2019), ~~and~~ increased tidal incursion ([Vasilopoulos et al., 2021](#)) and saline intrusion in deltaic environments (Eslami et al., 2019), amongst others ([Koehnken et al., 2020](#); [Bisht, 2021](#)). Yet, our inability to monitor levels of extraction, or the locations in which extraction occurs, routinely and accurately, currently hinders our ability to assess the sustainability of global sand extraction and provide effective environmental impact assessments for ~~reaches~~regions undergoing extensive mining.

40

In order to effectively and sustainably manage riverine sand resources, accurate and regular monitoring of the locations and rates of sediment extraction are required (Peduzzi, 2014; Bendixen et al., 2019). Yet the pervasive and diffuse nature of the riverine extraction process means that it often occurs at spatial scales (spread across many km² of river surface area), and in remote locations, that make on-site monitoring difficult. The advent of regular, high-resolution satellite imagery technologies (now often up to 3m ground pixel resolution and at sub-weekly return periods) permits the remote monitoring of the locations and extent of sediment mining in riverine and lacustrine environments (Duan et al., 2019; Xin and Park, 2021). As such, it is now possible to provide a synoptic overview of the locations and rates of sediment mining across large (basin and sub-catchment scale) areas.

45

50

The Lower Mekong River (LMR) is currently experiencing levels of sand mining that exceed natural sediment supply by up to a factor of seven (Hackney et al., 2020). This is resulting in net reach-wide incision (Hackney et al., 2020; Jordan et al., 2019, [Vasilopoulos et al., 2021](#)) with associated impacts on tidal extent ([Vasilopoulos et al., 2021](#)) and saline intrusion rates ~~and extent~~ (Eslami et al., 2019; Loc et al., 2021), changing flood frequencies (Park et al., 2020), impacts on regional fish stocks (Nuon et al., 2020) and alterations to the hydrology of the Tonle Sap Lake (Xin and Park, 2021). The current existing estimates of rates of sand extraction for the Mekong basin are placed at around 50 Mt yr⁻¹ (31 million m³ yr⁻¹; Bravard et al., 2013). This estimate is based on questionnaire data at mining sites carried out in 2011 and 2012 (Bravard et al., 2013). Since then, however, the demand for aggregates is likely to have increased, and so these estimates may be considerable underestimates of current extraction rates. Recent work has quantified one component of the LMRs sand budget, that of the incoming sediment load (Hackney et al., 2020), ~~but~~However, tighter constraints on the locations and rates of extraction, and exactly how these have changed ~~s~~ since the estimates of Bravard et al. (2013), are lacking.

60

Here, we detail the application of high-resolution (~5 m) PlanetScope satellite imagery to map and monitor the locations and extraction activity throughout the Lower Mekong River (LMR; Figure 1) in Cambodia over the period 2016 – 2020. We detail how this methodology permits, for the first time, the identification of extraction hotspots and provide revised estimates of the

65 volumes of sand extracted through the LMR in Cambodia. We combine these estimates of extracted volume with estimates of
sand transport through the LMR and demonstrate the level of sand deficit (the volume of sand naturally transported by the
LMR minus volume extracted) being experienced throughout the LMR. Furthermore, we combined satellite image analysis
and targeted bathymetric surveys to highlight the morphological impact of ongoing sand mining in the LMR.

2 Study site and Methods

70 2.1 The Mekong River

The Mekong River is one of the most intensely studied large river reaches in the world due to its combination of development
needs and human interference with its natural system (Bussi et al., 2021; Darby et al., 2016; Hackney et al., 2020; Räsänen et
al., 2017; Schmitt et al., 2017). Draining the Tibetan Plateau, the Mekong delivers $450 \text{ km}^3 \text{ yr}^{-1}$ of water (MRC, 2009) and 87
 Mt yr^{-1} of sediment (Darby et al., 2016) to the South China Sea (Figure 1a). Of that incoming suspended sediment load only 6
75 Mt yr^{-1} is sand (Hackney et al., 2020) due in part to extensive sediment trapping upstream in the Mekong catchment, with
hydropower development retaining up to 96% of the catchment sediment load (Kondolf et al., 2014, 2018; Schmitt et al.,
2017). This trapping effect is compounded by climatic changes altering the monsoon-driven hydrology of the LMR, resulting
in reduced suspended sediment loads (Darby et al., 2016; Walling and Fang, 2003) and driving changes to the morphology
and flows of the river (Anthony et al., 2015; Brunier et al., 2014; Eslami et al., 2019; Ha et al., 2018; [Vasilopoulos et al.](#)
80 [2021](#)). Prior estimates based on the study by Bravard et al. (2013) suggest that annually 35 million cubic meters (56 Mt) of
sand, gravel and pebbles are removed from the Mekong river in its entirety every year. Of this volume, sand accounts for 90%
(31 million cubic meters, or 50 Mt, per year). At the time, Cambodia accounted for 60% of the Mekong's sand extraction (18.7
million cubic meters or 32 Mt per year; Figure 1a) with the 18.1 million cubic meters (29 Mt) being extracted between
Kampong Cham and the Vietnamese border (Figure 1b; Bravard et al., 2013). In the years since this initial estimate, Phnom
85 Penh (along with many other cities in Cambodia and within the LMR basin) has seen rapid urban development (Mialhe et al.,
2019) with widespread infilling of floodplain lakes and land reclamation projects, all of which will increase local demand for
sand. As such, there is a vital need for more up to date estimates of sand extraction for the Mekong to account for changes
over the past decade.

2.2 Identification of mining vessels from satellite imagery

90 Monthly composite images from Planet labs PlanetScope Surface Reflectance (Planet Team, 2018) product were used to
identify boat activity on the Mekong River in Cambodia south of Kampong Cham to the Vietnamese border for the period
January 2016 to December 2020 (Figure 1). These monthly composites provide high resolution (4.77 m at the equator) red
(590 – 670 nm) green (500 – 590 nm) blue (455 – 515) images with minimal cloud cover projected in WGS84 Mercator (Figure
2a). This product was chosen to ensure that cloud cover effects were minimised throughout the monsoon periods (June –
95 October) and thus avoid seasonal bias in our extraction estimates (see below). The resolution of the composite images (4.77

m) is suitable for identifying sand mining vessels as these are typically ~60 m in length and ~10 m wide, thereby covering multiple pixels within the composite images (Figure 2). Smaller vessels such as fishing vessels and ferries were too small to be consistently identified within the composite scene, whilst larger shipping and container vessels are clearly visible yet distinguishable due to their larger size and location. The main trading port is located south of Phnom Penh and this container traffic is limited to the areas downstream of the port. As such, we can say with confidence that the majority of water borne traffic identifiable from the composite images within the area of interest is mining activity (Figures 1 and 2).

2.3 Estimation of extraction volumes

Within each monthly composite the centre of each vessel visible was identified based on their colour and shape (Figure 2b) and recorded in QGIS. For each monthly time step, the total number of boats visible is counted. All vessels within a 100 m buffer from the riverbanks are removed from the monthly count as it assumed these boats are moored and are deemed inactive. Of those boats deemed active (i.e. more than 100 m away from the riverbank), it is assumed that each vessel is filled and emptied once a day. This assumption is based on visual observations of the time it takes for a vessel to be completely filled by a dredging platform (approximately 3 hours) meaning it is unlikely that the same boat is filled more than once a day. The price of sand currently limits supply chains to local sources, as large distance supply chains are not economically viable. Therefore, we assume that each filled boat transits only a relatively short distance (i.e. to Phnom Penh, and a maximum distance of 50 km) before unloading, allowing for the filling and unloading cycle to be completed in one day.

Using ~~low level aerial photography~~ high resolution satellite imagery available ~~on~~ in Google Earth (provided by CNES/Airbus on 24/09/2019, which covered the entire study area), the dimensions of sand mining vessels were constrained. Across 50 vessels, the vessel length (m), L_b , vessel width (m), W_b , the length of the vessel hold (m), L_h and the width of the vessel hold (m), W_h , were recorded (Figure 2c). Google Earth imagery was used to constrain the vessel dimension as its higher spatial-resolution permits greater confidence in providing robust dimensions compared to the PlanetScope imagery. Field observations of vessel height (H_v) were taken of vessels in dry dock for maintenance. We estimate the volume each mining vessel can hold as 2100 m^3 ($L_h \times W_h \times H_v$; 29.3 m x 8.1 m x 7 m). A sand density of $1,600 \text{ kg m}^{-3}$ is used to convert this volume into a tonnage applying a compaction factor of 0.5 to account for the space left between grains due to the unconsolidated nature of the sand being dredged. In determining sand transport on the river bed from multibeam echo surveys Nittrouer et al. (2008) and Hackney et al. (2020) use a bed compaction factor (C_b) of 0.35. The value used here is higher as the force of the disturbance of suction dredging sand, its deposition in the mining vessels and the subsequent draining of water from the material is likely to reduce pore spaces and increase compaction. As there is no other compaction aside from gravity, but less water within the deposited material we assume a reduced pore space between sand grains within the vessel compared to the riverbed. To account for sensitive and uncertainty we vary C_b with an upper value of 0.65 and the lower limit of 0.35. We subsequently report all values using a central estimate of C_b of 0.5 with upper and lower bounds in parenthesis. For each month, the daily tonnage values

calculated from the active vessel count are multiplied by the number of days in each calendar month, assuming vessels are active seven days a week. These are then summed across the year to provide annual estimates of sand extraction.

130

2.4 Estimation of sediment transport rates for 2016 – 2020

Suspended- and bedload- sand transport was estimated for the LMR for the period 2016 to 2020 using ratings curves published in Darby et al. (2016) and Hackney et al. (2020). These estimates are derived for the monitoring station at Kratie (Figure 1) which is approximately 250 km upstream from Phnom Penh. Daily water levels (d , m) and discharge (Q , $\text{m}^3 \text{s}^{-1}$) for Kratie are available for the period 2016 – 2020 and 2016 – 2018, respectively, from the Mekong River Data Portal (portal.mrcmekong.org; station identifier 014901). To extend Q , up to 2020 a ratings curve ($r^2 = 0.96$, $p < 0.05$) is derived for the period of data overlap (2016 – 2018) where:

$$Q = 29.149d^{2.4059} \quad (1)$$

Suspended sediment flux (Q_s , kg s^{-1}) was then calculated using the ratings curve for Kratie from Darby et al. (2016), where:

$$Q_s = 0.0001298Q^{1.763} \quad (2)$$

Of this total suspended sediment flux, only 7% is composed of the sand fraction (Hackney et al., 2020). As such, the suspended sediment fluxes are multiplied by 0.07 to derive a suspended sand flux.

Bedload transport (Q_b) was calculated using the bedload ratings curve of Hackney et al. (2020):

$$Q_b = 0.0049233\omega_0^{1.4252} \quad (3)$$

where ω_0 is the critical stream power calculated as

$$\omega_0 = 290D_{50}^{\frac{3}{2}} \log \left[12 \frac{d}{D_{50}} \right] \quad (4)$$

Where D_{50} is the median grain size (m) reported at 500 μm as defined by bed sediment samples collected with an Ekman-style grab sampler. Each sample was dry-sieved for grains $>75 \mu\text{m}$, while finer grains were analysed using a Saturn DigiSizer to estimate the full grain-size distribution of each sample.

150 2.5 Bathymetric change detection

To highlight bathymetric change resulting from sand mining activities, river bed bathymetry from 2013 and 2019 are compared. A set of single beam echo sounding (SBES) surveys of the Mekong River from Neak Loeung to Kratie (Figure 1) was conducted between September and November 2013. A Garmin Fishfinder was connected to a Trimble differential-GPS unit and bathymetry was recorded at a rate of 1 Hz. Survey lines were designed in a saw-tooth pattern, completing a cross-section of the channel at one channel width spacing. Water elevation was calculated based on the water surface slope between the two Mekong River Commission (MRC) gauges and the water level at the closest MRC gauge at the date of the survey. Daily gauge readings for each site were obtained over the survey period. The daily values were then interpolated to hourly values using a cubic spline interpolant. The water surface slope between the two closest gauges for each hour was calculated assuming a

linear change in water surface slope between gauges. Distances between each gauge were calculated along the river centreline.
160 For each hour, the water surface slope was applied to the closest gauges' water level reading to generate a variable water level
for each survey date. To convert water depths to channel bed elevations, the zero gauge height at Kampong Cham was used
referenced to WGS84 ellipsoid. All water depth readings were adjusted to the Kampong Cham zero gauge height, determined
from a dGPS survey of the Kampong Cham gauge conducted in November 2013. Depending upon which MRC gauge was
closest, different offsets were applied (Kratie = +0.15 m, Neak Loeng = -0.6 m). The elevation data were used to generate a
165 raster DEM using a Kriging interpolant at 5m resolution.

Additionally, a bathymetry survey of the Mekong River at Rokar Korng (see Figure 1) was conducted in June 2019. A M9
acoustic Doppler current profiler equipped with real-time kinematic GPS (RTK-GPS) was used to collect riverbed elevation
(below water surface), whilst differential GPS was used to collect riverbank elevation including islands (above water surface).
170 The bathymetry at each survey point was obtained by subtracting water depth from water surface elevation measured by the
RTK-GPS. The reference datum of the RTK-GPS (WGS84) was used to register the water surface elevation recorded nearest
to the river bank. The point elevation dataset was ~~interpolated~~ kriged to a 5m raster ~~form~~ for comparing-comparison with the
2013 dataset.

3 Results

175 3.1 Temporal variations in sand extraction (2016 – 2020)

Over the period of 2016 – 2020 the number of sand mining vessels operational and active (i.e. more than 100 m from the river
bank) on the Mekong varied from twelve in May 2016 to 143 in November 2020 (Figure 3). An increase in the number of
vessels in operation is evident over the five year period, with superimposed seasonal changes in boat activity mapping onto
periods of high flow. During periods of high water levels (blue line in Figure 3) corresponding drops in boat numbers are
180 observed, for example during the period of August 2018 and August 2019, as conditions become unfavourable for boat travel
on the river during the high flow monsoon periods.

Converting the number of active vessels observed each month to a volume of sand (see section 2.3) and integrating these
estimates over the calendar year reveals a year on year increase in the volume of extracted sand from the Mekong River
185 between Kampong Cham and the Vietnamese border (Figure 4). Estimates of sand extracted for 2016 reveal that 24 Mt (17
Mt to 32 Mt) of sand was removed; with numbers in parenthesis representing upper and lower bounds (see section 2.3). Our
2016 estimate is consistent with the estimate of Bravard et al. (2013) who placed the extraction levels in Cambodia for 2013
at 30 Mt yr⁻¹. However, in the subsequent years, the volume of sand extracted from this reach of the Mekong has risen
significantly to an estimated 59 Mt (41 Mt to 75 Mt) in 2020 (Figure 4), at a rate of ~ 8 Mt yr⁻¹ (6 Mt yr⁻¹ to 10 Mt yr⁻¹). This

190 value is nearly double that reported by Bravard et al. (2013) for Cambodia and is comparable to the extraction rates estimated for the entire Mekong basin in 2013 (50 Mt yr⁻¹).

Over the same period, however, the natural supply of sediment within the Mekong River has not kept pace with extraction rates (Figure 4 and 5). The greatest annual volume of sand transported by the river in the period of observation was in 2018 and reached an estimated 10.9 Mt. Comparing an extraction volume of 50 Mt (35 Mt to 65 Mt) for 2018, to the 10.9 Mt of supply, nearly five (three to six) times the volume of sand supply is being removed. Moreover, basin-natural sand supply is observed to have dropped off in the years 2019 and 2020 to 5.6 and 3.7 Mt, respectively due to periods of lower flows (Figure 3). In 2020, the volume of sand removed, 59 Mt (41 Mt to 75 Mt), was 16 (11 to 20) times the volume of sand naturally supplied by the basin and riverine transport processes (3.7 Mt).

200

The balance between sand extraction and natural replenishment is key to ensure the sustainability of mining practices and to negate-dampen the negative environmental impacts on the morphology and stability of the river channel (Hackney et al., 2020, Vasilopoulos et al., 2021). By calculating the natural sand transport of the Mekong River (see section 2.4) we identify temporal variations in this balance at monthly time scales. A monthly time scale is more relevant than a year-averaged snapshot because of the seasonality in sediment transport governed by the monsoon that generates distinct periods of increased natural sand supply. Plotting monthly extraction rates alongside rates of sand transport (Figure 5), demonstrates clearly that natural supply is dwarfed by sand extraction, with supply only exceeding removal during two months of the entire five-year period (August 2018 and September 2019) under the middle and upper bound estimates. At these times, there is a sand surplus of 1.46 Mt, for both months under the median scenario, whilst under the upper bound estimates the supply exceeds removal by 0.6 Mt and 0.8 Mt, respectively. Assuming the lower bound of extraction, sand supply exceeds extraction rate in September 2016 (0.4 Mt), August 2017 (0.2 Mt), August and September 2018 (2.7 Mt combined) and September 2019 (2.1 Mt).

210

3.2 Spatial variations in sand extraction

To generate heat maps of mining activity, a kernel density estimate (KDE) was applied to the shapefiles created during the process of identifying active mining vessels. The KDE was calculated with a kernel radius of 1 km and plotted at a resolution of 100 m. Figure 6 shows examples of the heat maps produced for each year between 2016 and 2020 (we provide heat maps of June here as exemplars of the patterns observed. The full collection of monthly maps is provided in the supplementary information).

215

A gradual expansion of mining activity is observed throughout the study reach (Figure 6), with patchy, distinct areas of activity seen in June 2016, compared to more continuous activity across the study reach in June 2020. Over this period the area of channel that is actively mined has increased from 54 km² (15% of the total channel area) to 81 km² (23% of the total channel area). Throughout the five year period there are areas of the river that consistently appear as areas of high activity with boat

220

densities of 6 – 8 boats per km². The two prominent hot spots are at the apex of the Mekong Delta at Phnom Penh, at the confluence-difffluence of the Mekong, Tonle Sap and Bassac Rivers, and around a large island complex at Rokar Korng, located 30 km upstream from Phnom Penh. The latter location saw mining operations begin in 2017 and has since seen consistently high levels of activity. The area around Phnom Penh has been identified by previous research as a hot spot of mining activity and one which has undergone significant morphological impact on the river bed as a result (Hackney et al., 2020). This new data reveals that such alterations to the river bed were not a one off event, and the resulting bed incision (estimated at 0.13 m yr⁻¹; Hackney et al., 2020) will have been persistent over a period of at least seven years (noting the date of the survey reported in Hackney et al. (2020) was taken from 2014). Figure 6 also reveals that areas of high activity (both persistent and intermittent) are focussed on areas at the head of islands or at confluences; geomorphic units that are characterised by slower, shallower flows which promote sediment deposition (Bridge, 1993). Despite being areas of the river channel that may see rapid replenishment of sand due to their morphological characteristics, the excessive rates of extraction, combined with the previously reported sand deficit observed in the Mekong (section 3.1) means that the morphological impact of mining in these locations may result in changes to local hydrodynamics (Ashraf et al., 2011; Barman et al., 2018) and hence local channel stability. Such alterations to the morphological and hydrodynamical behaviour of the river channel will have attendant consequences for infrastructure stability (for example, loss of housing and road networks, and undermining of bridge piers and foundations), as well as wildlife habitat and agricultural land provision.

3.3 Morphological impacts

To highlight the impacts of persistent mining on sections of the Mekong River, a comparison of bathymetric surveys around the island complex at Rokar Korng located 30 km upstream of Phnom Penh (Figure 6) from 2013 and 2019 was undertaken. Over that period bed elevations have incised at a median rate of -0.265 m yr⁻¹ whilst mean incision over the same period is -0.16 m yr⁻¹ (Figure 7). Incision is predominantly centred on two locations at the upstream and downstream regions of the island complex in the centre of the large meander where incision rates of up to -5 m yr⁻¹ are observed (Figure 5a). Prior work has shown that river banks may shift to an unstable phase and destabilise if the river bed is incised by >3 m (Hackney et al., 2020). The rates of incision observed here suggest that over the six-year period 2013 – 2019, median (mean) incision is 1.56 m (0.96 m). As such, river banks in this reach are at risk of imminent transition to a period of enhanced erosion resulting from reach scale mining activities. Integrating out the elevation change presented in Figure 7 reveals that 101 Mt of sediment has been lost within this reach over the period 2013 – 2019. This equates to 17 Mt yr⁻¹ of sediment being eroded by a combination of natural and anthropogenic activity. Overlaying the locations of mining vessels identified from satellite imagery within this reach over the period 2016 – 2020 reveals that sand extraction is clustered around the locations which have the highest rates of incision (Figure 7b). Thus, it is evident that the major driver of bed incision within this reach is that of sand extraction operating both through the mechanisms of head cut erosion observed by Kondolf (1993) but also through diffusional morphodynamics redistributing sediment around the reach as mining pits infill. It is noted that the period of satellite image analysis (2016 to 2020) is shorter than the period between the bathymetric surveys (2013 to 2019). However, as rates of

extraction have been shown to increase over the period 2016 – 2020 (Figures 3 and 5) it is expected that the morphological impacts observed in Figure 7 reflect more recent mining activity and so would be reflected by the vessel activity observed during the period of satellite image analysis.

4 Discussion

260 Providing robust and up-to-date estimates of sediment extraction in riverine and deltaic environments is fundamental to underpin sustainable management of the sand commons. This is especially important in basins such as the Lower Mekong River where the impacts of sand mining are likely to be felt across national borders. The basin-wide impacts of riverbed incision resulting from sand mining are manifested in the LMR as increased river bank instability (Hackney et al., 2020),
265 [landward extension of the tidal dominance \(Vasilopoulos et al., 2021\)](#), saline intrusion (Eslami et al., 2019), and alterations to natural flow regimes (Park et al., 2020; Xin and Park, 2021). Current understanding of the impacts of sand mining on the LMR and its delta are underpinned by the estimates of Bravard et al. (2013). Although the values reported in Bravard et al. (2013) highlight the negative sand budget the LMR has been experiencing over the past decade or so, findings presented here suggest that they have significantly underestimated the magnitude of this deficit. Indeed, findings reported above (Figure 5) demonstrate that just two months in the past six years have seen positive sand budgets under mean scenarios (five months
270 under the lowest estimates). This not only highlights the need to ensure higher flows are preserved throughout the LMR basin to ensure natural sediment transport is able to replenish sand deposits, but offers potential sustainable management options that focuses on limiting activity at times when sand transport is greatest.

Revised rates of sand extraction are reported here for Cambodia alone. In 2020 these are two times that reported by Bravard
275 et al. (2013) and greater than current best estimates for the entire Mekong basin (50 Mt; Figure 4). It is likely that similar (if not greater) increases in the rates of extraction have been seen in both Laos and Vietnam, and thus we can expect that the basin-wide extraction volumes are likely to be an order of magnitude greater than those provided by Bravard et al. (2013). [For example, Vasilopoulos et al., \(2021\) quantified a mean channel deepening of 1.6 m between 2008 and 2018 for the principal channels of the Vietnamese Mekong delta, which correspond to a sediment loss of approximately \$184 \pm 39 \text{ Mt a}^{-1}\$.](#) It has widely
280 been reported that globally official estimates of sand are limited and frequently underestimated (Bendixen et al., 2019; UNEP, 2019). Indeed, official records for 2019 reported in (Haffner, 2020) place extraction rates in Cambodia at 9 million m³ (14.4 Mt). Our analysis suggests that in 2019, ~50 Mt was extracted (35 Mt to 65 Mt), which is 3.5 times (2.4 to 4.5 times) the official reported volumes. Such under-representations of sand extraction in official statistics can have significant implications for local and basin-wide management plans that are underpinned by official records. Existing and future plans for the
285 sustainable management of the Mekong and other large river systems need to be informed by up to date, robust and accurate estimates of sand extraction. The use of high-resolution satellite imagery as detailed here can provide a low-cost, widely accessible, means of providing this underpinning data across a range of environments and at high resolutions and across large spatial and temporal extents.

290 Figures 6 and 7 highlight the spatial extent of sand mining across the LMR in Cambodia. Hotspots of activity are evident near
Phnom Penh and the island complex near Rokar Korng. The former location confirms similar analysis reported in Xin and
Park (2021) which identifies areas of high activity at Phnom Penh. Previous work has also highlighted the morphological
impact of sand mining in this location revealing large areas of bed disturbance and widespread incision at rates of 0.13 m a^{-1}
295 over a ten year period (Brunier et al., 2014). This corresponds with rates of incision reported here (0.26 m yr^{-1} ; Figure 7) which
sit between these two previous estimates and strengthens the evidence that sand mining is having major impacts on lowering
river bed elevations in the LMR. Importantly, the present research demonstrates that significant riverbed incision is being felt
30 km upstream of the apex of the Mekong delta located at Phnom Penh. The implications of this are significant for the fluxes
and the routing of sediment to the apex of the Mekong delta and further downstream where such sediment fluxes are the only
300 counter and offset to eustatic sea-level rise across the delta. Given that it has already been demonstrated that sand mining is
impacting the hydrology of the Tonle Sap Lake system (Xin and Park, 2021), it is likely that similar impacts are already being
felt along the Mekong and Bassac rivers downstream of the delta apex potentially impacting downstream flood risk and channel
stability in the Vietnamese Mekong delta into the future.

305 **5 Conclusion**

This research provides robust and up-to-date estimates of the volumes of sand removed from the bed of the Mekong River in
Cambodia over the period 2016 – 2020. Using monthly composite images derived from high-resolution PlanetScope satellite
imagery, the number and location of mining vessels active on the river are identified. We show that rates of extraction have
increased year on year from 24 Mt (17 Mt to 32) in 2016, to 59 Mt (41 Mt to 75 Mt) in 2020 at a rate of $\sim 8 \text{ Mt yr}^{-1}$ (6 Mt yr^{-1}
310 to 10 Mt yr^{-1}); where values in parenthesis relate to lower and upper error bounds respectively. Our revised extraction estimates
for 2020 (59 Mt) are two times greater than previous best estimates for sand extraction for Cambodia (32 Mt) and greater than
current best estimates for the entire Mekong Basin (50 Mt). We show that areas of high vessel activity are correlated to areas
of major bed incision resulting from mining activities and demonstrate median bed incision of -0.26 m yr^{-1} over the period
2013 to 2016. Our revised estimates highlight the need for regular monitoring of sand mining activity and advocate for local
315 and basin management plans to be updated to better reflect the current situation. The tools developed herein provide a low-
cost, robust method to provide regular up-to-date estimates of the volume and location of mining activity in the world's rivers
and deltas, and offer a step-change in the insight into the environmental and biophysical implication of the sand extraction
industry.

Data availability

320 All shape-files produced from PlanetScope imagery are available on request from corresponding author. Hydrological data for
the gauging stations in Cambodia are available from the Mekong River Commission Data Portal
(<http://portal.mrcmekong.org/>).

Author contribution

Christopher Hackney: Conceptualisation, Methodology, Investigation, Formal analysis, Writing – Original Draft,
325 Supervision. **Grigorios Vasilopoulos:** Conceptualisation, Methodology, Investigation, Writing – Review and Editing,
Supervision. **Sokchhay Heng:** Methodology, Investigation, Writing – Review and Editing. **Vasudha Darbari:** Methodology,
Investigation, Writing – Review and Editing. **Samuel Walker:** Methodology, Investigation, Writing – Review and Editing.
Daniel R. Parsons: Conceptualisation, Methodology, Investigation, Writing – Review and Editing.

330 Competing interests

The authors declare they have no conflict of interest

Acknowledgements

CRH was supported by a NUAcT Fellowship from Newcastle University and the UKRI GCRF Living Deltas Hub (grant
NE/S008926/1). CRH and DP acknowledge funding from NERC (NE/JO21970/1 and NE/JO21881/1; to Southampton and
335 Hull, respectively). GV, VD, and SW, were supported by the University of Hull's GCRF funding and an Energy and
Environment Institute scholarship. DP acknowledges funding from EU Horizon 2020 Programme (ERC GEOSTICK, 725955).
We extend our thanks to the Department of Hydrology and River Works, Cambodia for their help and field assistance in
collecting the bathymetry data in 2013. We thank the Mekong River Commission for their help in accessing and providing
water level and discharge data used in this study.

340 References

- Anthony, E. J., Brunier, G., Besset, M., Goichot, M., Dussouillez, P. and Nguyen, V. L.: Linking rapid erosion of the Mekong
River delta to human activities, *Nat. Publ. Gr.*, doi:10.1038/srep14745, 2015.
- Ashraf, M. A., Maah, M. J., Yusoff, I., Wajid, A. and Mahmood, K.: Sand mining effects, causes and concerns: A case study
from Bestari Jaya, Selangor, Peninsular Malaysia, *Sci. Res. Essays*, 6(6), 1216–1231, doi:10.5897/SRE10.690, 2011.
- 345 Barman, B., Kumar, B. and Sarma, A. K.: Turbulent flow structures and geomorphic characteristics of a mining affected
alluvial channel, *Earth Surf. Process. Landforms*, 43(9), 1811–1824, doi:10.1002/esp.4355, 2018.

- Bendixen, M., Best, J. L., Hackney, C. R. and Iversen, L. L.: Time is running out for sand, *Nature*, 571, 29–31, doi:10.1080/24694452.201, 2019.
- Best, J.: Anthropogenic stresses on the world's big rivers, *Nat. Geosci.*, 12(1), 7–21, doi:10.1038/s41561-018-0262-x, 2019.
- 350 Best, J. and Darby, S. E.: The Pace of Human-Induced Change in Large Rivers: Stresses, Resilience, and Vulnerability to Extreme Events, , doi:10.1016/j.oneear.2020.05.021, 2020.
- Bhattacharya, J. P., Miall, A. D., Ferron, C., Gabriel, J., Randazzo, N., Kynaston, D., Jicha, B. R. and Singer, B. S.: Time-stratigraphy in point sourced river deltas: Application to sediment budgets, shelf construction, and paleo-storm records, *Earth-Science Rev.*, 199, 102985, doi:10.1016/J.EARSCIREV.2019.102985, 2019.
- 355 [Bisht, A.: Conceptualizing sand extractivism: Deconstructing an emerging resource frontier, *The Extractive Industries and Society*, 8, 2, 100904, doi:10.1016/j.exis.2021.100904, 2021.](#)
- Bravard, J.-P., Goichot, M. and Gaijllot, S.: Geography of sand and gravel mining in the Lower Mekong River, *EchoGéo*, 26, doi:10.4000/echogeo.13659, 2013.
- Bridge, J. S.: The interaction between channel geometry, water flow, sediment transport and deposition in braided rivers, *Geol. Soc. London, Spec. Publ.*, 75(75), 13–71, doi:10.1144/GSL.SP.1993.075.01.02, 1993.
- 360 Brunier, G., Anthony, E. J., Goichot, M., Provansal, M. and Dussouillez, P.: Recent morphological changes in the Mekong and Bassac river channels, Mekong delta: The marked impact of river-bed mining and implications for delta destabilisation, *Geomorphology*, 224, 177–191, doi:10.1016/J.GEOMORPH.2014.07.009, 2014.
- Bussi, G., Darby, S. E., Whitehead, P. G., Jin, L., Dadson, S. J., Voepel, H. E., Vasilopoulos, G., Hackney, C. R., Hutton, C.,
- 365 Berchoux, T., Parsons, D. R. and Nicholas, A.: Impact of dams and climate change on suspended sediment flux to the Mekong delta, *Sci. Total Environ.*, 755, 142468, doi:10.1016/j.scitotenv.2020.142468, 2021.
- Dai, A. and Trenberth, K. E.: Estimates of freshwater discharge from continents: Latitudinal and seasonal variations., 2002.
- Darby, S. E., Hackney, C. R., Leyland, J., Kummu, M., Lauri, H., Parsons, D. R., Best, J. L., Nicholas, A. P. and Aalto, R.: Fluvial sediment supply to a mega-delta reduced by shifting tropical-cyclone activity, *Nature*, 539(7628), 276–279, doi:10.1038/nature19809, 2016.
- 370 Duan, H., Cao, Z., Shen, M., Liu, D. and Xiao, Q.: Detection of illicit sand mining and the associated environmental effects in China's fourth largest freshwater lake using daytime and nighttime satellite images, *Sci. Total Environ.*, 647, 606–618, doi:10.1016/j.scitotenv.2018.07.359, 2019.
- Eslami, S., Hoekstra, P., Nguyen Trung, N., Ahmed Kantoush, S., Van Binh, D., Duc Dung, D., Tran Quang, T. and van der
- 375 Vegt, M.: Tidal amplification and salt intrusion in the Mekong Delta driven by anthropogenic sediment starvation, *Sci. Rep.*, 9(1), 18746, doi:10.1038/s41598-019-55018-9, 2019.
- Ha, D. T., Ouillon, S. and Van Vinh, G.: Water and suspended sediment budgets in the lower mekong from high-frequency measurements (2009-2016), *Water*, 10(7), doi:10.3390/w10070846, 2018.
- Hackney, C. R., Darby, S. E., Parsons, D. R., Leyland, J., Best, J. L., Aalto, R., Nicholas, A. P. and Houseago, R. C.: River
- 380 bank instability from unsustainable sand mining in the lower Mekong River, *Nat. Sustain.*, 3(3), 217–225, doi:10.1038/s41893-

019-0455-3, 2020.

Haffner, A.: Kingdom of sand, South East Asian Globe, 3rd December [online] Available from: https://southeastasiaglobe.com/a-kingdom-built-on-sand/?pico_new_user=true&pico_ui=verified, 2020.

385 Jordan, C., Tiede, J., Lojek, O., Visscher, J., Apel, H., Nguyen, H. Q., Quang, C. N. X. and Schlurmann, T.: Sand mining in the Mekong Delta revisited - current scales of local sediment deficits, *Sci. Rep.*, 9(1), 17823, doi:10.1038/s41598-019-53804-z, 2019.

Koehnken, L. and Rintoul, M.: Impacts of Sand Mining on Ecosystem Structure, Process & Biodiversity in Rivers. [online] Available from: https://d2ouvy59p0dg6k.cloudfront.net/downloads/sand_mining_impacts_on_world_rivers_final_.pdf (Accessed 14 August 2019), 2018.

390 Koehnken, L., Rintoul, M. S., Goichot, M., Tickner, D., Loftus, A. and Acreman, M. C.: Impacts of riverine sand mining on freshwater ecosystems: A review of the scientific evidence and guidance for future research, *River Res. Appl.*, 36(3), 362–370, doi:10.1002/rra.3586, 2020.

Kondolf, G. M., Rubin, Z. K. and Minear, J. T.: Dams on the Mekong: Cumulative sediment starvation, *Water Resour. Res.*, 50, 5158–5169, doi:10.1002/2013WR014651.

395 Kondolf, G. M., Schmitt, R. J. P., Carling, P., Darby, S., Arias, M., Bizzi, S., Castelletti, A., Cochrane, T. A., Gibson, S., Kummu, M., Oeurng, C., Rubin, Z. and Wild, T.: Changing sediment budget of the Mekong: Cumulative threats and management strategies for a large river basin, *Sci. Total Environ.*, 625, 114–134, doi:10.1016/J.SCITOTENV.2017.11.361, 2018.

400 Loc, H. H., Van Binh, D., Park, E., Shrestha, S., Dung, T. D., Son, V. H., Truc, N. H. T., Mai, N. P. and Seijger, C.: Intensifying saline water intrusion and drought in the Mekong Delta: From physical evidence to policy outlooks, *Sci. Total Environ.*, 757, 143919, doi:10.1016/j.scitotenv.2020.143919, 2021.

Mialhe, F., Gunnell, Y., Navratil, O., Choi, D., Sovann, C., Lejot, J., Gaudou, B., Se, B. and Landon, N.: Spatial growth of Phnom Penh, Cambodia (1973–2015): Patterns, rates, and socio-ecological consequences, *Land use policy*, 87, 104061, doi:10.1016/j.landusepol.2019.104061, 2019.

405 [Miatto, A., Schandl, H., Fishman, T and Tanikawa, H.: Global patterns and trends for non-metallic minerals used for construction, *Journal of Industrial Ecology*, 21, 4, 924 - 937, doi: 10.1111/jiec.12471, 2017.](#)

Milliman, J. D. and Farnsworth, K. L.: River discharge to the coastal ocean, Cambridge, UK., 2011.

MRC: The Flow of the Mekong., 2009.

410 Nittrouer, J. A., Allison, M. A. and Campanella, R.: Bedform transport rates for the lowermost Mississippi River, *J. Geophys. Res. Earth Surf.*, 113(3), 1–16, doi:10.1029/2007JF000795, 2008.

Nuon, V., Lek, S., Ngor, P. B., So, N. and Grenouillet, G.: Fish Community Responses to Human-Induced Stresses in the Lower Mekong Basin, *Water*, 12(12), 3522, doi:10.3390/w12123522, 2020.

Park, E., Loc Ho, H., Tran, D. D., Yang, X., Alcantara, E., Merino, E. and Son, V. H.: Dramatic decrease of flood frequency in the Mekong Delta due to river-bed mining and dyke construction, , doi:10.1016/j.scitotenv.2020.138066, 2020.

- 415 Peduzzi, P.: Sand, rarer than one thinks, *Environ. Dev.*, 11(March), 208–218, doi:10.1016/j.envdev.2014.04.001, 2014.
- Planet Team (2018). Planet Application Program Interface: In Space for Life on Earth. San Francisco, CA. <https://api.planet.com>.
- Räsänen, T. A., Someth, P., Lauri, H., Koponen, J., Sarkkula, J. and Kummu, M.: Observed river discharge changes due to hydropower operations in the Upper Mekong Basin, *J. Hydrol.*, 545, 28–41, doi:10.1016/J.JHYDROL.2016.12.023, 2017.
- 420 Schmitt, R. J. P., Rubin, Z. and Kondolf, G. M.: Losing ground - scenarios of land loss as consequence of shifting sediment budgets in the Mekong Delta, , doi:10.1016/j.geomorph.2017.04.029, 2017.
- Torres, A., Brandt, J., Lear, K. and Liu, J.: A looming tragedy of the sand commons, *Science* (80-.), 357(6355), 970–971, doi:10.1126/science.aao0503, 2017.
- UNEP: Sand and Sustainability: Finding New Solutions for Environmental Governance of Global Sand Resources. [online]
- 425 Available from: <https://wedocs.unep.org/handle/20.500.11822/28163>, 2019.
- [Vasilopoulos, G., Quan, Q.L, Parsons, D.R., Darby, S.E., Tri, V.P.D., Hung, N.N., Haigh, I.D., Voepel, H.E., Nicholas, A.P., Aalto, R.: Establishing sustainable sediment budgets is critical for climate-resilient mega-deltas, *Environmental Research Letters*. 16, 6, 064089, doi: 10.1088/1748-9326/ac06fc, 2021.](#)
- Walling, D. E. and Fang, D.: Recent trends in the suspended sediment loads of the world’s rivers, *Glob. Planet. Change*, 39(1–
- 430 2), 111–126, doi:10.1016/S0921-8181(03)00020-1, 2003.
- Xin, W. and Park, E.: Shrinking Tonlé Sap and the recent intensification of sand mining in the Cambodian Mekong River, *Sci. Total Environ.*, 777, 146180, doi:10.1016/j.scitotenv.2021.146180, 2021.

435


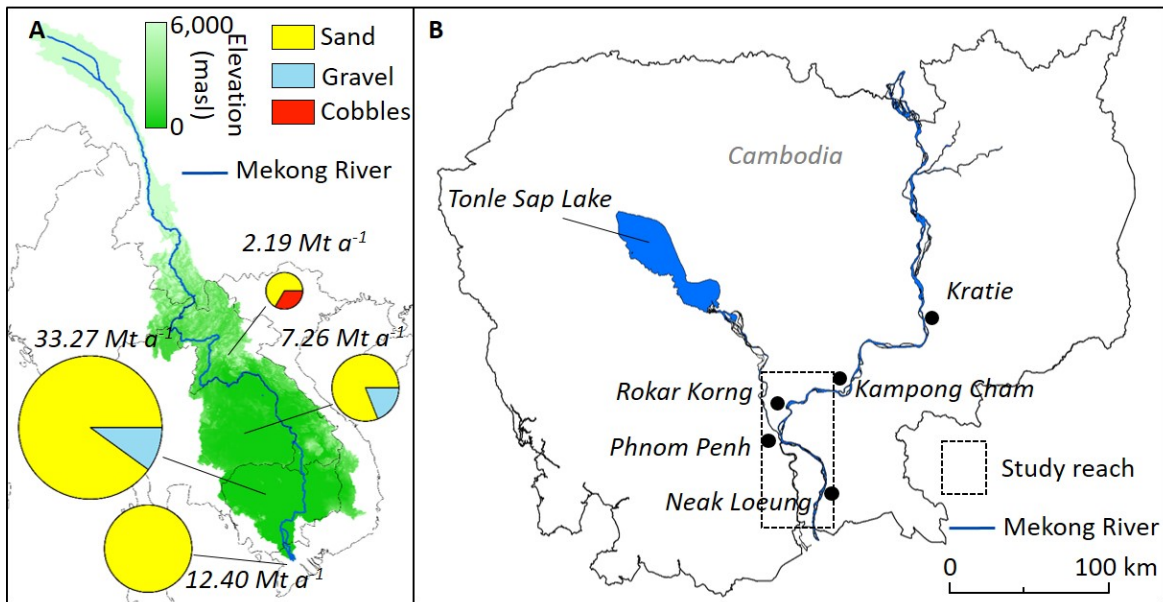



Figure 1: A) Established sediment extraction rates (Mt yr⁻¹) across the Mekong River basin in 2013. The composition and volume of material extracted are disaggregated by basin-country taken from Bravard et al. (2013). The size of the pie charts scales with the volume extracted. B) Location of the study reach in Cambodia (dashed box) from Kampong Cham to the Vietnamese border.

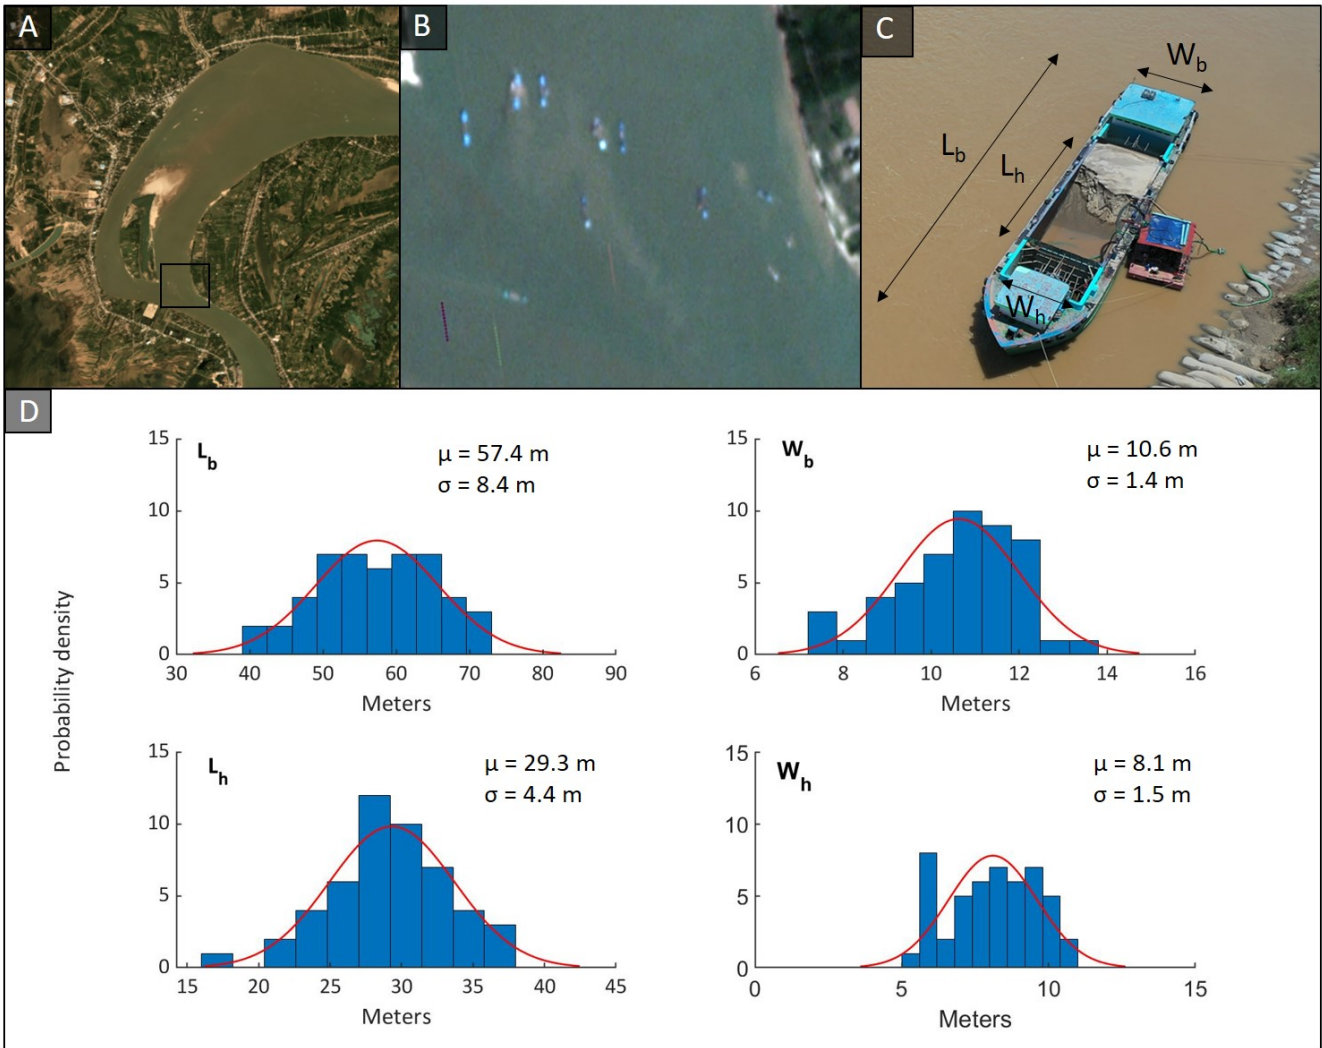


440

445

Figure 2: A) Example PlanetScope monthly composite image of a stretch of the Mekong river from December 2018 (Planet Team, 2018). The square highlights the area depicted in panel B. B) Zoomed in area of PlanetScope imagery (Planet Team, 2018) for the Mekong showing how mining vessels are identifiable within the satellite imagery. C) Dimensions of mining vessels recorded including the boat length (L_b), the boat width (W_b), the hold length (L_h) and the hold width (W_h). These latter two dimensions are important for the calculation of extraction volumes as they define the volume of sand each boat can transport when fully laden. Image is the authors own. D) Estimated dimensions of the mining vessels active on the Mekong taken from Google Earth imagery. 50 boats were measured and dimensions were recorded as depicted in panel C.

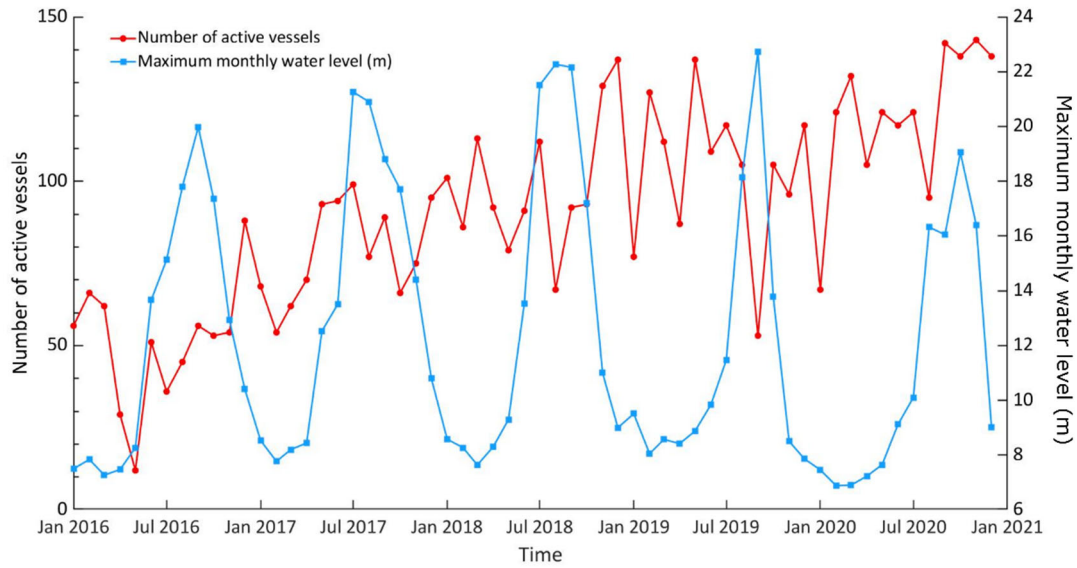


450 **Figure 3: The number of active vessels (vessels greater than 100 m from the riverbank) identified in each monthly composite image over the period January 2016 to December 2020 (red) and the maximum water level (m) at Kratie in each month over the same period, highlighting that higher water levels are associated with reduced river vessel traffic due to difficult navigation conditions and faster flowing water in monsoon periods.**

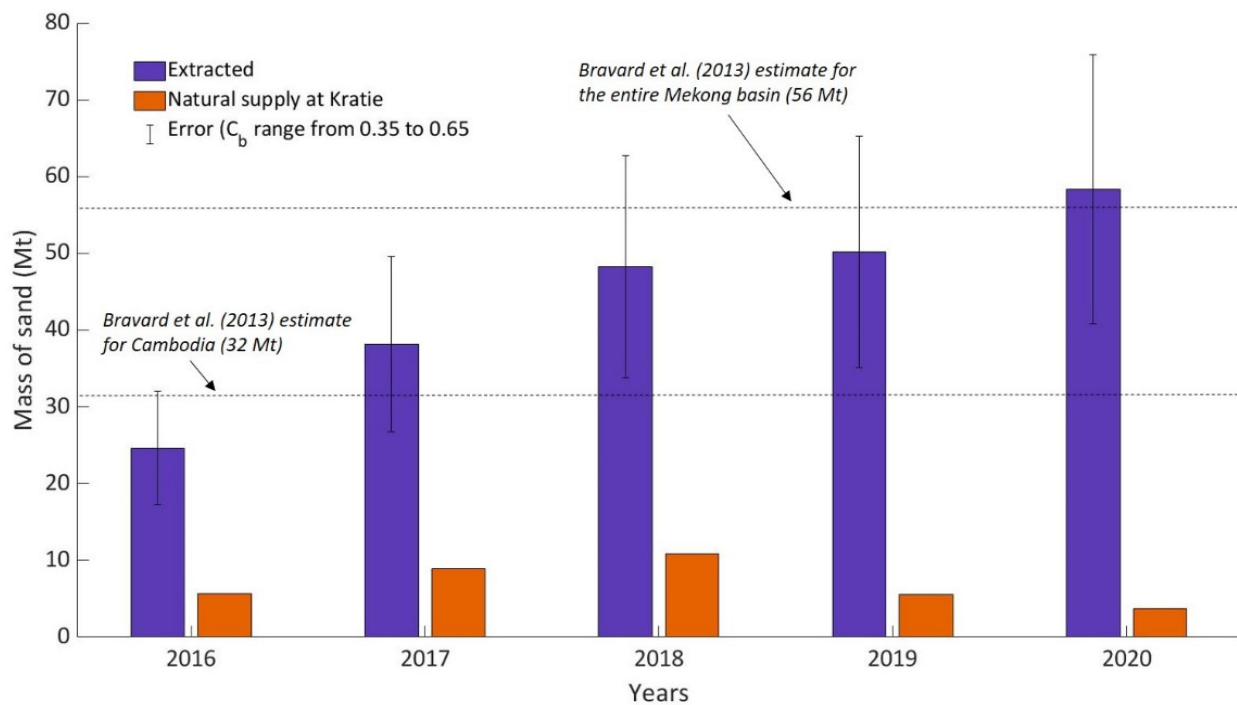


455

460


Figure 4: Volume of sand extracted each year for the period 2016 to 2020 (orange bars) for the study reach in Cambodia between Kampong Cham and the Vietnamese border. Error bars represent annual volumes calculated under varying levels of the compaction factor, C_b , from 0.35 to 0.65 (see section 2.3 for details). Green bars represent the annual volume of sand supply transported naturally by riverine processes at Kratie, Cambodia. The mass of sand extracted from Cambodia in 2013 as estimated by Bravard et al. (2013) is demarked by the dash-dot line at 32 Mt, similarly the estimated mass of sand extracted from the entire Mekong basin in 2013 is demarked by the dashed line (56 Mt).

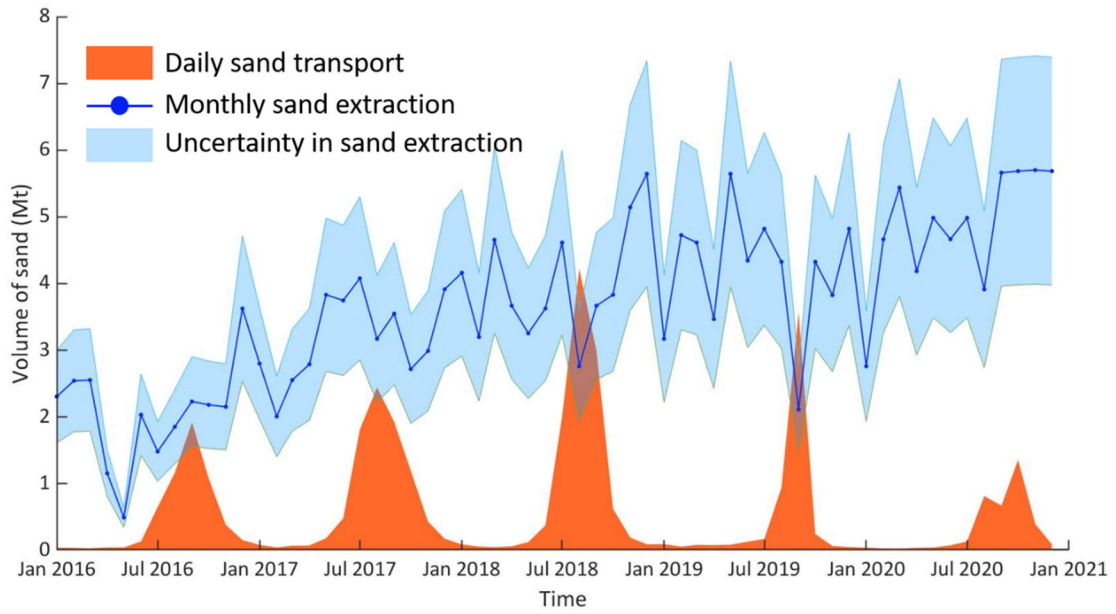

465 **Figure 5: Monthly volumes of sand extraction (Mt) estimated from the number of vessels visible in the satellite imagery over the period 2016 to 2020 (blue) with error estimates defined by adjusting the compaction coefficient, C_b , between 0.35 and 0.65 (blue shaded area). Daily natural sand transport (Mt) at Kratie (see section 2.4 for details) for the same period is depicted by the shaded orange area.**

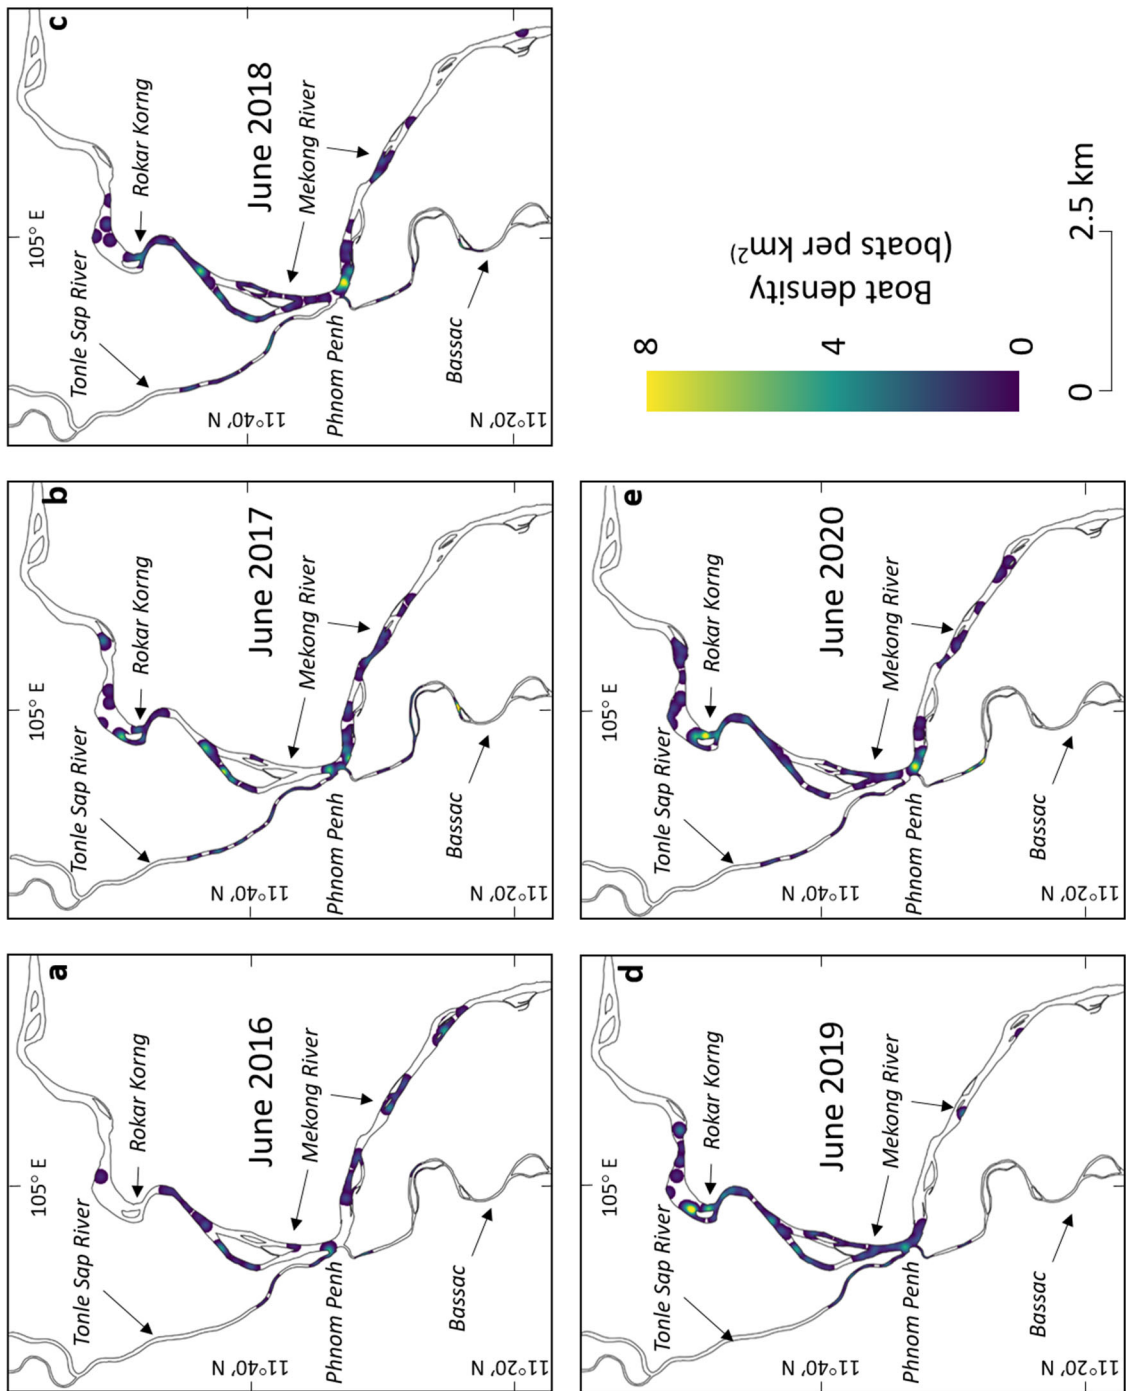

470 **Figure 6: Annual heat maps for June for the period 2016 - 2020 of the Mekong River around Phnom Penh showing the locations of mining activity and the density of boats (boats per km²) showing changes in the spatial distribution of mining activity over the five year period.**

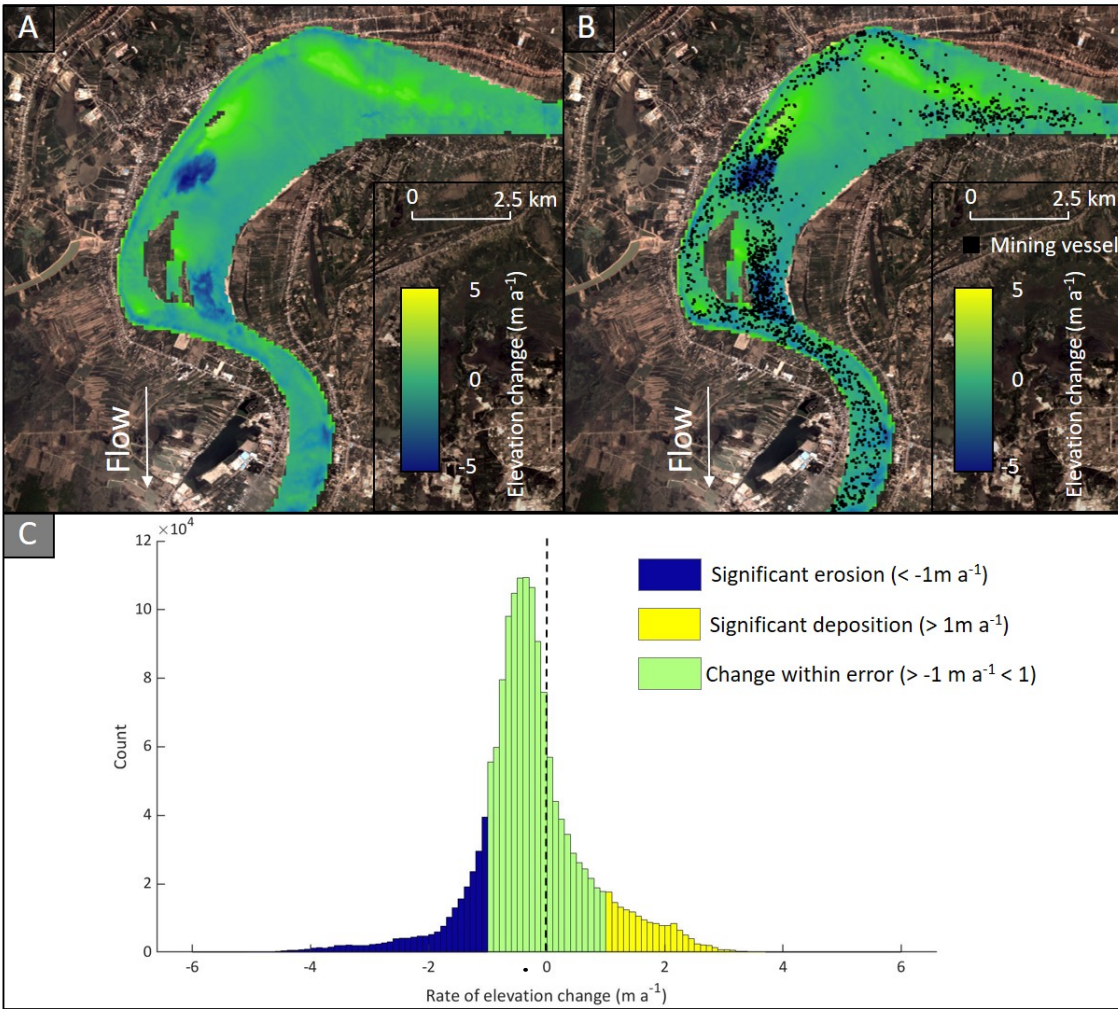

475 | Figure 7: A) Rate of elevation change between 2013 and 2019 of the Mekong River near Rokar Korng highlighting areas of erosion (blue) and deposition (yellow). B) Overlay on the map depicted in A are the locations of all observed mining vessels during the period 2016 to 2020 demonstrating that the zones of greatest erosion observed in A correspond to areas of high mining activity. C) Histogram of elevation changes for this reach between 2013 and 2019. The median rate of bed elevation change is -0.25 m yr^{-1} (mean elevation change is -0.16 m yr^{-1}). The dashed line demarks zero net change in elevation. Image background in panels A and B are PlanetScope monthly composite scenes from December 2020 (Planet Team, 2018).