



Sand mining far outpaces natural supply in a large alluvial river

Christopher R. Hackney¹, Grigorios Vasilopoulos², Sokchhay Heng³, Vasudha Darbari², Samuel Walker², Daniel R. Parsons²

¹ School of Geography, Politics and Sociology, Newcastle University, Newcastle upon Tyne, NE1 7RU, UK

5 ² Energy and Environment Institute, University of Hull, Hull, UK, HU6 7RX

³ Institute of Technology of Cambodia, Phnom Penh, Cambodia

Correspondence to: Christopher R. Hackney (christopher.hackney@ncl.ac.uk)

Abstract The world's large rivers are facing reduced sediment loads due to anthropogenic activities such as hydropower
10 development and sediment extraction. Globally estimates of sand extraction from large river systems is lacking, in part due to
the pervasive and distributed nature of extraction processes. In the Mekong River, current basin wide estimates of sand
extraction are 50 Mt, and based on estimates from 2013. Here, we demonstrate the ability of high-resolution satellite imagery
to map, monitor and estimate volumes of sand extraction on the Lower Mekong River in Cambodia. We use monthly composite
15 images from PlanetScope imagery (5 m resolution) to estimate sand extraction volumes over the period 2016 – 2020 and show
that rates of extraction have increased year on year from 24 Mt (17 Mt to 32) in 2016, to 59 Mt (41 Mt to 75 Mt) in 2020 at a
rate of $\sim 8 \text{ Mt yr}^{-1}$ (6 Mt yr^{-1} to 10 Mt yr^{-1}); where values in parenthesis relate to lower and upper error bounds, respectively.
Our revised estimates for 2020 (59 Mt) are nearly two times greater than previous best estimates for sand extraction for
Cambodia (32 Mt) and greater than current best estimates for the entire Mekong Basin (50 Mt). We show that over the five
20 year period, only two months have seen positive (supply exceeds extraction) sand budgets under mean and upper bound
scenarios (five months under the lower bound estimates). We demonstrate that this net negative sand budget to the river is
driving major bed incision with a median rate of -0.26 m a^{-1} over the period 2013 to 2019. The use of satellite imagery to
monitor sand mining activities provide a low-cost means to generate up-to-date, robust estimates of sand extraction in the
worlds large rivers that are needed to underpin sustainable management plans of the global sand commons.

1 Introduction

25 The world's rivers transport $\sim 37,000 \text{ km}^3$ of water (Dai and Trenberth, 2002) and ~ 19 billion tonnes of sediment and minerals
(Milliman and Farnsworth, 2011) to the global oceans each year. Over the past century, anthropogenic pressures associated
with population growth, urbanisation and economic development have seen an increase in the demand for the natural resources
river systems provide (Best, 2019; Best and Darby, 2020). In particular, the demand for sand and gravel from rivers has seen
unprecedented growth in the past two to three decades (Pedeutzi, 2014; Torres et al., 2017), with demand now outstripping
30 supply (Bendixen et al., 2019). Today, between 32 and 50 billion tonnes of aggregates are extracted globally every year



(Koehnken and Rintoul, 2018). The environmental impacts of such high extraction rates are being felt around the world (Koehnken et al., 2020); with impacts manifest as river bank instability (Hackney et al., 2020), changes in riverine biodiversity (Bhattacharya et al., 2019) and increased saline intrusion in deltaic environments (Eslami et al., 2019). Yet, our inability to monitor levels of extraction, or the locations in which extraction occurs, routinely and accurately, currently hinders our ability to assess the sustainability of global sand extraction and provide effective environmental impact assessments for reaches undergoing extensive mining.

In order to effectively and sustainably manage riverine sand resources, accurate and regular monitoring of the locations and rates of sediment extraction are required (Peduzzi, 2014; Bendixen et al., 2019). Yet the pervasive and diffuse nature of the riverine extraction process means that it often occurs at spatial scales (spread across many km² of river surface area), and in remote locations, that make on-site monitoring difficult. The advent of regular, high-resolution satellite imagery technologies (now often up to 3m ground pixel resolution and at sub-weekly return periods) permits the remote monitoring of the locations and extent of sediment mining in riverine and lacustrine environments (Duan et al., 2019; Xin and Park, 2021). As such, it is now possible to provide a synoptic overview of the locations and rates of sediment mining across large (basin and sub-catchment scale) areas.

The Lower Mekong River (LMR) is currently experiencing levels of sand mining that exceed natural sediment supply by up to a factor of seven (Hackney et al., 2020). This is resulting in net reach-wide incision (Hackney et al., 2020; Jordan et al., 2019) with associated impacts on saline intrusion rates and extent (Eslami et al., 2019; Loc et al., 2021), changing flood frequencies (Park et al., 2020), impacts on regional fish stocks (Nuon et al., 2020) and alterations to the hydrology of the Tonle Sap Lake (Xin and Park, 2021). The current existing estimates of rates of sand extraction for the Mekong basin are placed at around 50 Mt yr⁻¹ (31 million m³ yr⁻¹; Bravard et al., 2013). This estimate is based on questionnaire data at mining sites carried out in 2011 and 2012 (Bravard et al., 2013). Since then, however, the demand for aggregates is likely to have increased, and so these estimates may be considerable underestimates of current extraction rates. Recent work has quantified one component of the LMRs sand budget, that of the incoming sediment load (Hackney et al., 2020), but tighter constraints on the locations and rates of extraction, and exactly how these have changes since the estimates of Bravard et al. (2013), are lacking.

Here, we detail the application of high-resolution (~5 m) PlanetScope satellite imagery to map and monitor the locations and extraction activity throughout the Lower Mekong River (LMR; Figure 1) in Cambodia over the period 2016 – 2020. We detail how this methodology permits, for the first time, the identification of extraction hotspots and provide revised estimates of the volumes of sand extracted through the LMR in Cambodia. We combine these estimates of extracted volume with estimates of sand transport through the LMR and demonstrate the level of sand deficit (the volume of sand naturally transported by the LMR minus volume extracted) being experienced throughout the LMR. Furthermore, we combined satellite image analysis and targeted bathymetric surveys to highlight the morphological impact of ongoing sand mining in the LMR.



65 2 Study site and Methods

2.1 The Mekong River

The Mekong River is one of the most intensely studied large river reaches in the world due to its combination of development needs and human interference with its natural system (Bussi et al., 2021; Darby et al., 2016; Hackney et al., 2020; Räsänen et al., 2017; Schmitt et al., 2017). Draining the Tibetan Plateau, the Mekong delivers $450 \text{ km}^3 \text{ yr}^{-1}$ of water (MRC, 2009) and 87
70 Mt yr^{-1} of sediment (Darby et al., 2016) to the South China Sea (Figure 1a). Of that incoming suspended sediment load only 6 Mt yr^{-1} is sand (Hackney et al., 2020) due in part to extensive sediment trapping upstream in the Mekong catchment, with hydropower development retaining up to 96% of the catchment sediment load (Kondolf et al., 2014, 2018; Schmitt et al., 2017). This trapping effect is compounded by climatic changes altering the monsoon-driven hydrology of the LMR, resulting in reduced suspended sediment loads (Darby et al., 2016; Walling and Fang, 2003) and driving changes to the morphology and flows of the river (Anthony et al., 2015; Brunier et al., 2014; Eslami et al., 2019; Ha et al., 2018). Prior estimates based
75 on the study by Bravard et al. (2013) suggest that annually 35 million cubic meters (56 Mt) of sand, gravel and pebbles are removed from the Mekong river in its entirety every year. Of this volume, sand accounts for 90% (31 million cubic meters, or 50 Mt, per year). At the time, Cambodia accounted for 60% of the Mekong's sand extraction (18.7 million cubic meters or 32 Mt per year; Figure 1a) with the 18.1 million cubic meters (29 Mt) being extracted between Kampong Cham and the
80 Vietnamese border (Figure 1b; Bravard et al., 2013). In the years since this initial estimate, Phnom Penh (along with many other cities in Cambodia and within the LMR basin) has seen rapid urban development (Mialhe et al., 2019) with widespread infilling of floodplain lakes and land reclamation projects, all of which will increase local demand for sand. As such, there is a vital need for more up to date estimates of sand extraction for the Mekong to account for changes over the past decade.

2.2 Identification of mining vessels from satellite imagery

85 Monthly composite images from Planet labs PlanetScope Surface Reflectance (Planet Team, 2018) product were used to identify boat activity on the Mekong River in Cambodia south of Kampong Cham to the Vietnamese border for the period January 2016 to December 2020 (Figure 1). These monthly composites provide high resolution (4.77 m at the equator) red (590 – 670 nm) green (500 – 590 nm) blue (455 – 515) images with minimal cloud cover projected in WGS84 Mercator (Figure 2a). This product was chosen to ensure that cloud cover effects were minimised throughout the monsoon periods (June –
90 October) and thus avoid seasonal bias in our extraction estimates (see below). The resolution of the composite images (4.77 m) is suitable for identifying sand mining vessels as these are typically ~60 m in length and ~10 m wide, thereby covering multiple pixels within the composite images (Figure 2). Smaller vessels such as fishing vessels and ferries were too small to be consistently identified within the composite scene, whilst larger shipping and container vessels are clearly visible yet distinguishable due to their larger size and location. The main trading port is located south of Phnom Penh and this container traffic is limited to the areas downstream of the port. As such, we can say with confidence that the majority of water borne
95 traffic identifiable from the composite images within the area of interest is mining activity (Figures 1 and 2).



2.3 Estimation of extraction volumes

Within each monthly composite the centre of each vessel visible was identified based on their colour and shape (Figure 2b) and recorded in QGIS. For each monthly time step, the total number of boats visible is counted. All vessels within a 100 m
100 buffer from the riverbanks are removed from the monthly count as it assumed these boats are moored and are deemed inactive. Of those boats deemed active (i.e. more than 100 m away from the riverbank), it is assumed that each vessel is filled and emptied once a day. This assumption is based on visual observations of the time it takes for a vessel to be completely filled by a dredging platform (approximately 3 hours) meaning it is unlikely that the same boat is filled more than once a day. The price of sand currently limits supply chains to local sources, as large distance supply chains are not economically viable.
105 Therefore, we assume that each filled boat transits only a relatively short distance (i.e. to Phnom Penh, and a maximum distance of 50 km) before unloading, allowing for the filling and unloading cycle to be completed in one day.

Using low level aerial photography available on Google Earth, the dimensions of sand mining vessels were constrained. Across 50 vessels, the vessel length (m), L_b , vessel width (m), W_b , the length of the vessel hold (m), L_h and the width of the vessel hold
110 (m), W_h , were recorded (Figure 2c). Field observations of vessel height (H_v) were taken of vessels in dry dock for maintenance. We estimate the volume each mining vessel can hold as $2100 \text{ m}^3 (L_h \times W_h \times H_v; 29.3 \text{ m} \times 8.1 \text{ m} \times 7 \text{ m})$. A sand density of $1,600 \text{ kg m}^3$ is used to convert this volume into a tonnage applying a compaction factor of 0.5 to account for the space left between grains due to the unconsolidated nature of the sand being dredged. In determining sand transport on the river bed from multibeam echo surveys Nittrouer et al. (2008) and Hackney et al. (2020) use a bed compaction factor (C_b) of 0.35. The value
115 used here is higher as the force of the disturbance of suction dredging sand, its deposition in the mining vessels and the subsequent draining of water from the material is likely to reduce pore spaces and increase compaction. As there is no other compaction aside from gravity, but less water within the deposited material we assume a reduced pore space between sand grains within the vessel compared to the riverbed. To account for sensitive and uncertainty we vary C_b with an upper value of 0.65 and the lower limit of 0.35. We subsequently report all values using a central estimate of C_b of 0.5 with upper and lower
120 bounds in parenthesis. For each month, the daily tonnage values calculated from the active vessel count are multiplied by the number of days in each calendar month. These are then summed across the year to provide annual estimates of sand extraction.

2.4 Estimation of sediment transport rates for 2016 – 2020

Suspended- and bedload- sand transport was estimated for the LMR for the period 2016 to 2020 using ratings curves published
125 in Darby et al. (2016) and Hackney et al. (2020). These estimates are derived for the monitoring station at Kratie (Figure 1) which is approximately 250 km upstream from Phnom Penh. Daily water levels (d , m) and discharge (Q , $\text{m}^3 \text{ s}^{-1}$) for Kratie are available for the period 2016 – 2020 and 2016 – 2018, respectively, from the Mekong River Data Portal



(portal.mrcmekong.org; station identifier 014901). To extend Q , up to 2020 a ratings curve ($r^2 = 0.96$, $p < 0.05$) is derived for the period of data overlap (2016 – 2018) where:

130
$$Q = 29.149d^{2.4059} \quad (1)$$

Suspended sediment flux (Q_s , kg s^{-1}) was then calculated using the ratings curve for Kratie from Darby et al. (2016), where:

$$Q_s = 0.0001298Q^{1.763} \quad (2)$$

Of this total suspended sediment flux, only 7% is composed of the sand fraction (Hackney et al., 2020). As such, the suspended sediment fluxes are multiplied by 0.07 to derive a suspended sand flux.

135 Bedload transport (Q_b) was calculated using the bedload ratings curve of Hackney et al. (2020):

$$Q_b = 0.0049233\omega_0^{1.4252} \quad (3)$$

where ω_0 is the critical stream power calculated as

$$\omega_0 = 290D_{50}^{\frac{3}{2}} \log \left[12 \frac{d}{D_{50}} \right] \quad (4)$$

140 Where D_{50} is the median grain size (m) reported at 500 μm as defined by bed sediment samples collected with an Ekman-style grab sampler. Each sample was dry-sieved for grains $>75 \mu\text{m}$, while finer grains were analysed using a Saturn DigiSizer to estimate the full grain-size distribution of each sample.

2.5 Bathymetric change detection

To highlight bathymetric change resulting from sand mining activities, river bed bathymetry from 2013 and 2019 are compared. A set of single beam echo sounding (SBES) surveys of the Mekong River from Neak Loeung to Kratie (Figure 1) was
145 conducted between September and November 2013. A Garmin Fishfinder was connected to a Trimble differential-GPS unit and bathymetry was recorded at a rate of 1 Hz. Survey lines were designed in a saw-tooth pattern, completing a cross-section of the channel at one channel width spacing. Water elevation was calculated based on the water surface slope between the two Mekong River Commission (MRC) gauges and the water level at the closest MRC gauge at the date of the survey. Daily gauge readings for each site were obtained over the survey period. The daily values were then interpolated to hourly values using a
150 cubic spline interpolant. The water slope between the two closest gauges for each hour was calculated assuming a linear change in water slope between gauges. Distances between each gauge were calculated along the river centreline. For each hour, the water surface slope was applied to the closest gauges' water level reading to generate a variable water level for each survey date. To convert water depths to channel bed elevations, the zero gauge height at Kampong Cham was used referenced to WGS84. All water depth readings were adjusted to the Kampong Cham zero gauge height, determined from a dGPS survey of
155 the Kampong Cham gauge conducted in November 2013. Depending upon which MRC gauge was closest, different offsets were applied (Kratie = +0.15 m, Neak Loeung = - 0.6 m). The elevation data were used to generate a raster DEM using a Kriging interpolant at 5m resolution.



160 Additionally, a bathymetry survey of the Mekong River at Rokar Korng (see Figure 1) was conducted in June 2019. A M9
acoustic Doppler current profiler equipped with real-time kinematic GPS (RTK-GPS) was used to collect riverbed elevation
(below water surface), whilst differential GPS was used to collect riverbank elevation including islands (above water surface).
The bathymetry at each survey point was obtained by subtracting water depth from water surface elevation measured by the
RTK-GPS. The reference datum of the RTK-GPS (WGS84) was used to register the water surface elevation recorded nearest
to the river bank. The point elevation dataset was interpolated to a 5m raster form for comparing with the 2013 dataset.

165 3 Results

3.1 Temporal variations in sand extraction (2016 – 2020)

Over the period of 2016 – 2020 the number of sand mining vessels operational and active (i.e. more than 100 m from the river
bank) on the Mekong varied from twelve in May 2016 to 143 in November 2020 (Figure 3). An increase in the number of
vessels in operation is evident over the five year period, with superimposed seasonal changes in boat activity mapping onto
170 periods of high flow. During periods of high water levels (blue line in Figure 3) corresponding drops in boat numbers are
observed, for example during the period of August 2018 and August 2019, as conditions become unfavourable for boat travel
on the river during the high flow monsoon periods.

Converting the number of active vessels observed each month to a volume of sand (see section 2.3) and integrating these
175 estimates over the calendar year reveals a year on year increase in the volume of extracted sand from the Mekong River
between Kampong Cham and the Vietnamese border (Figure 4). Estimates of sand extracted for 2016 reveal that 24 Mt (17
Mt to 32 Mt) of sand was removed; with numbers in parenthesis representing upper and lower bounds (see section 2.3). Our
2016 estimate is consistent with the estimate of Bravard et al. (2013) who placed the extraction levels in Cambodia for 2013
at 30 Mt yr⁻¹. However, in the subsequent years, the volume of sand extracted from this reach of the Mekong has risen
180 significantly to an estimated 59 Mt (41 Mt to 75 Mt) in 2020 (Figure 4), at a rate of ~ 8 Mt yr⁻¹ (6 Mt yr⁻¹ to 10 Mt yr⁻¹). This
value is nearly double that reported by Bravard et al. (2013) for Cambodia and is comparable to the extraction rates estimated
for the entire Mekong basin in 2013 (50 Mt yr⁻¹).

Over the same period, however, the natural supply of sediment within the Mekong River has not kept pace with extraction
185 rates (Figure 4 and 5). The greatest annual volume of sand transported by the river in the period of observation was in 2018
and reached an estimated 10.9 Mt. Comparing an extraction volume of 50 Mt (35 Mt to 65 Mt) for 2018, to the 10.9 Mt of
supply, nearly five (three to six) times the volume of sand supply is being removed. Moreover, basin sand supply is observed
to have dropped off in the years 2019 and 2020 to 5.6 and 3.7 Mt, respectively due to periods of lower flows (Figure 3). In
2020, the volume of sand removed, 59 Mt (41 Mt to 75 Mt), was 16 (11 to 20) times the volume of sand naturally supplied by
190 the basin and riverine transport processes (3.7 Mt).



The balance between sand extraction and natural replenishment is key to ensure the sustainability of mining practices and to negate the negative environmental impacts on the morphology and stability of the river channel (Hackney et al., 2020). By calculating the natural sand transport of the Mekong River (see section 2.4) we identify temporal variations in this balance at monthly time scales. A monthly time scale is more relevant than a year-averaged snapshot because of the seasonality in sediment transport governed by the monsoon that generates distinct periods of increased natural sand supply. Plotting monthly extraction rates alongside rates of sand transport (Figure 5), demonstrates clearly that natural supply is dwarfed by sand extraction, with supply only exceeding removal during two months of the entire five-year period (August 2018 and September 2019) under the middle and upper bound estimates. At these times, there is a sand surplus of 1.46 Mt, for both months under the median scenario, whilst under the upper bound estimates the supply exceeds removal by 0.6 Mt and 0.8 Mt, respectively. Assuming the lower bound of extraction, sand supply exceeds extraction rate in September 2016 (0.4 Mt), August 2017 (0.2 Mt), August and September 2018 (2.7 Mt combined) and September 2019 (2.1 Mt).

3.2 Spatial variations in sand extraction

To generate heat maps of mining activity, a kernel density estimate (KDE) was applied to the shapefiles created during the process of identifying active mining vessels. The KDE was calculated with a kernel radius of 1 km and plotted at a resolution of 100 m. Figure 6 shows examples of the heat maps produced for each year between 2016 and 2020 (we provide heat maps of June here as exemplars of the patterns observed. The full collection of monthly maps is provided in the supplementary information).

A gradual expansion of mining activity is observed throughout the study reach (Figure 6), with patchy, distinct areas of activity seen in June 2016, compared to more continuous activity across the study reach in June 2020. Over this period the area of channel that is actively mined has increased from 54 km² (15% of the total channel area) to 81 km² (23% of the total channel area). Throughout the five year period there are areas of the river that consistently appear as areas of high activity with boat densities of 6 – 8 boats per km². The two prominent hot spots are at the apex of the Mekong Delta at Phnom Penh, at the confluence-difffluence of the Mekong, Tonle Sap and Bassac Rivers, and around a large island complex at Rokar Korng, located 30 km upstream from Phnom Penh. The latter location saw mining operations began in 2017 and has since seen consistently high levels of activity. The area around Phnom Penh has been identified by previous research as a hot spot of mining activity and one which has undergone significant morphological impact on the river bed as a result (Hackney et al., 2020). This new data reveals that such alterations to the river bed were not a one off event, and the resulting bed incision (estimated at 0.13 m yr⁻¹; Hackney et al., 2020) will have been persistent over a period of at least seven years (noting the date of the survey reported in Hackney et al. (2020) was taken from 2014). Figure 6 also reveals that areas of high activity (both persistent and intermittent) are focussed on areas at the head of islands or at confluences; geomorphic units that are characterised by slower, shallower flows which promote sediment deposition (Bridge, 1993). Despite being areas of the river channel that may see rapid



225 replenishment of sand due to their morphological characteristics, the excessive rates of extraction, combined with the
previously reported sand deficit observed in the Mekong (section 3.1) means that the morphological impact of mining in these
locations may result in changes to local hydrodynamics (Ashraf et al., 2011; Barman et al., 2018) and hence local channel
stability. Such alterations to the morphological and hydrodynamical behaviour of the river channel will have attendant
consequences for infrastructure stability (for example, loss of housing and road networks, and undermining of bridge piers and
foundations), as well as wildlife habitat and agricultural land provision.

230 3.3 Morphological impacts

To highlight the impacts of persistent mining on sections of the Mekong River, a comparison of bathymetric surveys around
the island complex at Rokar Korng located 30 km upstream of Phnom Penh (Figure 6) from 2013 and 2019 was undertaken.
Over that period bed elevations have incised at a median rate of -0.25 m yr^{-1} whilst mean incision over the same period is $-$
 0.16 m yr^{-1} (Figure 7). Incision is predominantly centred on two locations at the upstream and downstream regions of the island
235 complex in the centre of the large meander where incision rates of up to -5 m yr^{-1} are observed (Figure 5a). Integrating out the
elevation change presented in Figure 7 reveals that 101 Mt of sediment has been lost within this reach over the period 2013 –
2019. This equates to 17 Mt yr^{-1} of sediment being eroded by a combination of natural and anthropogenic activity. Overlaying
the locations of mining vessels identified from satellite imagery within this reach over the period 2016 – 2020 reveals that sand
extraction is clustered around the locations which have the highest rates of incision (Figure 7b). Thus, it is evident that the
240 major driver of bed incision within this reach is that of sand extraction operating both through the mechanisms of head cut
erosion observed by Kondolf (1993) but also through diffusional morphodynamics redistributing of sediment around the reach
as mining pits infill. It is noted that the period of satellite image analysis (2016 to 2020) is shorter than the period between the
bathymetric surveys (2013 to 2019). However, as rates of extraction have been shown to increase over the period 2016 – 2020
(Figures 3 and 5) it is expected that the morphological impacts observed in Figure 7 reflect more recent mining activity and so
245 would be reflected by the vessel activity observed during the period of satellite image analysis.

4 Discussion

Providing robust and up-to-date estimates of sediment extraction in riverine and deltaic environments is fundamental to
underpin sustainable management of the sand commons. This is especially important in basins such as the Lower Mekong
River where the impacts of sand mining are likely to be felt across national borders. The basin-wide impacts of riverbed
250 incision resulting from sand mining are manifest in the LMR as increased river bank instability (Hackney et al., 2020), saline
intrusion (Eslami et al., 2019), and alterations to natural flow regimes (Park et al., 2020; Xin and Park, 2021). Current
understanding of the impacts of sand mining on the LMR and its delta are underpinned by the estimates of Bravard et al.
(2013). Although the values reported in Bravard et al. (2013) highlight the negative sand budget the LMR has been
experiencing over the past decade or so, findings presented here suggest that they have significantly underestimated the
255 magnitude of this deficit. Indeed, findings reported above (Figure 5) demonstrate that just two months in the past six years



have seen positive sand budgets under mean scenarios (five months under the lowest estimates). This not only highlights the need to ensure higher flows are preserved throughout the LMR basin to ensure natural sediment transport is able to replenish sand deposits, but offers potential sustainable management options that focuses on limiting activity at times when sand transport is greatest.

260

Revised rates of sand extraction are reported here for Cambodia alone. In 2020 these are two times that reported by Bravard et al. (2013) and greater than current best estimates for the entire Mekong basin (50 Mt; Figure 4). It is likely that similar (if not greater) increases in the rates of extraction have been seen in both Laos and Vietnam, and thus we can expect that the basin-wide extraction volumes are likely to be an order of magnitude greater than those provided by Bravard et al. (2013). It has widely been reported that globally official estimates of sand are limited and frequently underestimated (Bendixen et al., 2019; UNEP, 2019). Indeed, official records for 2019 reported in (Haffner, 2020) place extraction rates in Cambodia at 9 million m³ (14.4 Mt). Our analysis suggests that in 2019, ~50 Mt was extracted (35 Mt to 65 Mt), which is 3.5 times (2.4 to 4.5 times) the official reported volumes. Such under-representations of sand extraction in official statistics can have significant implications for local and basin-wide management plans that are underpinned by official records. Existing and future plans for the sustainable management of the Mekong and other large river systems need to be informed by up to date, robust and accurate estimates of sand extraction. The use of high-resolution satellite imagery as detailed here can provide a low-cost, widely accessible, means of providing this underpinning data across a range of environments and at high resolutions and across large spatial and temporal extents.

270

Figures 6 and 7 highlight the spatial extent of sand mining across the LMR in Cambodia. Hotspots of activity are evident near Phnom Penh and the island complex near ROKAR KORNG. The former location confirms similar analysis reported in Xin and Park (2021) which identifies areas of high activity at Phnom Penh. Previous work has also highlighted the morphological impact of sand mining in this location revealing large areas of bed disturbance and widespread incision at rates of 0.13 m a⁻¹ (Hackney et al., 2020). Similar work throughout the Mekong delta has shown incision rates can be in the order of 0.59 m yr⁻¹ over a ten year period (Brunier et al., 2014). This corresponds with rates of incision reported here (0.26 m yr⁻¹; Figure 7) which sit between these two previous estimates and strengthens the evidence that sand mining is having major impacts on lowering river bed elevations in the LMR. Importantly, the present research demonstrates that significant riverbed incision is being felt 30 km upstream of the apex of the Mekong delta. The implications of this are significant for the fluxes and the routing of sediment to the apex of the Mekong delta and further downstream where such sediment fluxes are the only counter and offset to eustatic sea-level rise across the delta. Given that it has already been demonstrated that sand mining is impacting the hydrology of the Tonle Sap Lake system (Xin and Park, 2021), it is likely that similar impacts are already being felt along the Mekong and Bassac rivers downstream of the delta apex potentially impacting downstream flood risk and channel stability in the Vietnamese Mekong delta into the future.

285



290 5 Conclusion

This research provides robust and up-to-date estimates of the volumes of sand removed from the bed of the Mekong River in Cambodia over the period 2016 – 2020. Using monthly composite images derived from high-resolution PlanetScope satellite imagery, the number and location of mining vessels active on the river are identified. We show that rates of extraction have increased year on year from 24 Mt (17 Mt to 32) in 2016, to 59 Mt (41 Mt to 75 Mt) in 2020 at a rate of $\sim 8 \text{ Mt yr}^{-1}$ (6 Mt yr⁻¹ to 10 Mt yr⁻¹); where values in parenthesis relate to lower and upper error bounds respectively. Our revised extraction estimates for 2020 (59 Mt) are two times greater than previous best estimates for sand extraction for Cambodia (32 Mt) and greater than current best estimates for the entire Mekong Basin (50 Mt). We show that areas of high vessel activity are correlated to areas of major bed incision resulting from mining activities and demonstrate median bed incision of -0.26 m yr^{-1} over the period 2013 to 2016. Our revised estimates highlight the need for regular monitoring of sand mining activity and advocate for local and basin management plans to be updated to better reflect the current situation. The tools developed herein provide a low-cost, robust method to provide regular up-to-date estimates of the volume and location of mining activity in the world's rivers and deltas, and offer a step-change in the insight into the environmental and biophysical implication of the sand extraction industry.

Data availability

305 All shape files produced from PlanetScope imagery are available on request from corresponding author. Hydrological data for the gauging stations in Cambodia are available from the Mekong River Commission Data Portal (<http://portal.mrcmekong.org/>).

Author contribution

Christopher Hackney: Conceptualisation, Methodology, Investigation, Formal analysis, Writing – Original Draft, Supervision. **Grigorios Vasilopoulos:** Conceptualisation, Methodology, Investigation, Writing – Review and Editing, Supervision. **Sokchhay Heng:** Methodology, Investigation, Writing – Review and Editing. **Vasudha Darbari:** Methodology, Investigation, Writing – Review and Editing. **Samuel Walker:** Methodology, Investigation, Writing – Review and Editing. **Daniel R. Parsons:** Conceptualisation, Methodology, Investigation, Writing – Review and Editing.

315 Competing interests

The authors declare they have no conflict of interest



Acknowledgements

CRH was supported by a NUAcT Fellowship from Newcastle University and the UKRI GCRF Living Deltas Hub (grant NE/S008926/1). CRH and DP acknowledge funding from NERC (NE/JO21970/1 and NE/JO21881/1; to Southampton and
320 Hull, respectively). GV, VD, and SW, were supported by the University of Hull's GCRF funding and an Energy and Environment Institute scholarship. DP acknowledges funding from EU Horizon 2020 Programme (ERC GEOSTICK, 725955). We extend our thanks to the Department of Hydrology and River Works, Cambodia for their help and field assistance in collecting the bathymetry data in 2013. We thank the Mekong River Commission for their help in accessing and providing water level and discharge data used in this study.

325 References


- Anthony, E. J., Brunier, G., Besset, M., Goichot, M., Dussouillez, P. and Nguyen, V. L.: Linking rapid erosion of the Mekong River delta to human activities, *Nat. Publ. Gr.*, doi:10.1038/srep14745, 2015.
- Ashraf, M. A., Maah, M. J., Yusoff, I., Wajid, A. and Mahmood, K.: Sand mining effects, causes and concerns: A case study from Bestari Jaya, Selangor, Peninsular Malaysia, *Sci. Res. Essays*, 6(6), 1216–1231, doi:10.5897/SRE10.690, 2011.
- 330 Barman, B., Kumar, B. and Sarma, A. K.: Turbulent flow structures and geomorphic characteristics of a mining affected alluvial channel, *Earth Surf. Process. Landforms*, 43(9), 1811–1824, doi:10.1002/esp.4355, 2018.
- Bendixen, M., Best, J. L., Hackney, C. R. and Iversen, L. L.: Time is running out for sand, *Nature*, 571, 29–31, doi:10.1080/24694452.2019, 2019.
- Best, J.: Anthropogenic stresses on the world's big rivers, *Nat. Geosci.*, 12(1), 7–21, doi:10.1038/s41561-018-0262-x, 2019.
- 335 Best, J. and Darby, S. E.: The Pace of Human-Induced Change in Large Rivers: Stresses, Resilience, and Vulnerability to Extreme Events, , doi:10.1016/j.oneear.2020.05.021, 2020.
- Bhattacharya, J. P., Miall, A. D., Ferron, C., Gabriel, J., Randazzo, N., Kynaston, D., Jicha, B. R. and Singer, B. S.: Time-stratigraphy in point sourced river deltas: Application to sediment budgets, shelf construction, and paleo-storm records, *Earth-Science Rev.*, 199, 102985, doi:10.1016/J.EARSCIREV.2019.102985, 2019.
- 340 Bravard, J.-P., Goichot, M. and Gaijllot, S.: Geography of sand and gravel mining in the Lower Mekong River, *EchoGéo*, 26, doi:10.4000/echogeo.13659, 2013.
- Bridge, J. S.: The interaction between channel geometry, water flow, sediment transport and deposition in braided rivers, *Geol. Soc. London, Spec. Publ.*, 75(75), 13–71, doi:10.1144/GSL.SP.1993.075.01.02, 1993.
- Brunier, G., Anthony, E. J., Goichot, M., Provansal, M. and Dussouillez, P.: Recent morphological changes in the Mekong and Bassac river channels, Mekong delta: The marked impact of river-bed mining and implications for delta destabilisation, *Geomorphology*, 224, 177–191, doi:10.1016/J.GEOMORPH.2014.07.009, 2014.
- 345 Bussi, G., Darby, S. E., Whitehead, P. G., Jin, L., Dadson, S. J., Voepel, H. E., Vasilopoulos, G., Hackney, C. R., Hutton, C., Berchoux, T., Parsons, D. R. and Nicholas, A.: Impact of dams and climate change on suspended sediment flux to the Mekong




- delta, *Sci. Total Environ.*, 755, 142468, doi:10.1016/j.scitotenv.2020.142468, 2021.
- 350 Dai, A. and Trenberth, K. E.: Estimates of freshwater discharge from continents: Latitudinal and seasonal variations., 2002.
- Darby, S. E., Hackney, C. R., Leyland, J., Kummu, M., Lauri, H., Parsons, D. R., Best, J. L., Nicholas, A. P. and Aalto, R.: Fluvial sediment supply to a mega-delta reduced by shifting tropical-cyclone activity, *Nature*, 539(7628), 276–279, doi:10.1038/nature19809, 2016.
- Duan, H., Cao, Z., Shen, M., Liu, D. and Xiao, Q.: Detection of illicit sand mining and the associated environmental effects in
355 China's fourth largest freshwater lake using daytime and nighttime satellite images, *Sci. Total Environ.*, 647, 606–618, doi:10.1016/j.scitotenv.2018.07.359, 2019.
- Eslami, S., Hoekstra, P., Nguyen Trung, N., Ahmed Kantoush, S., Van Binh, D., Duc Dung, D., Tran Quang, T. and van der Vegt, M.: Tidal amplification and salt intrusion in the Mekong Delta driven by anthropogenic sediment starvation, *Sci. Rep.*, 9(1), 18746, doi:10.1038/s41598-019-55018-9, 2019.
- 360 Ha, D. T., Ouillon, S. and Van Vinh, G.: Water and suspended sediment budgets in the lower mekong from high-frequency measurements (2009–2016), *Water*, 10(7), doi:10.3390/w10070846, 2018.
- Hackney, C. R., Darby, S. E., Parsons, D. R., Leyland, J., Best, J. L., Aalto, R., Nicholas, A. P. and Houseago, R. C.: River bank instability from unsustainable sand mining in the lower Mekong River, *Nat. Sustain.*, 3(3), 217–225, doi:10.1038/s41893-019-0455-3, 2020.
- 365 Haffner, A.: Kingdom of sand, South East Asian Globe, 3rd December [online] Available from: https://southeastasiaglobe.com/a-kingdom-built-on-sand/?pico_new_user=true&pico_ui=verified, 2020.
- Jordan, C., Tiede, J., Lojek, O., Visscher, J., Apel, H., Nguyen, H. Q., Quang, C. N. X. and Schlurmann, T.: Sand mining in the Mekong Delta revisited - current scales of local sediment deficits, *Sci. Rep.*, 9(1), 17823, doi:10.1038/s41598-019-53804-z, 2019.
- 370 Koehnken, L. and Rintoul, M.: Impacts of Sand Mining on Ecosystem Structure, Process & Biodiversity in Rivers. [online] Available from: https://d2ouvy59p0dg6k.cloudfront.net/downloads/sand_mining_impacts_on_world_rivers_final.pdf (Accessed 14 August 2019), 2018.
- Koehnken, L., Rintoul, M. S., Goichot, M., Tickner, D., Loftus, A. and Acreman, M. C.: Impacts of riverine sand mining on freshwater ecosystems: A review of the scientific evidence and guidance for future research, *River Res. Appl.*, 36(3), 362–
375 370, doi:10.1002/rra.3586, 2020.
- Kondolf, G. M., Rubin, Z. K. and Minear, J. T.: Dams on the Mekong: Cumulative sediment starvation, *Water Resour. Res.*, 50, 5158–5169, doi:10.1002/2013WR014651.
- Kondolf, G. M., Schmitt, R. J. P., Carling, P., Darby, S., Arias, M., Bizzi, S., Castelletti, A., Cochrane, T. A., Gibson, S., Kumm, M., Oeurng, C., Rubin, Z. and Wild, T.: Changing sediment budget of the Mekong: Cumulative threats and
380 management strategies for a large river basin, *Sci. Total Environ.*, 625, 114–134, doi:10.1016/J.SCITOTENV.2017.11.361, 2018.
- Loc, H. H., Van Binh, D., Park, E., Shrestha, S., Dung, T. D., Son, V. H., Truc, N. H. T., Mai, N. P. and Seijger, C.: Intensifying



- saline water intrusion and drought in the Mekong Delta: From physical evidence to policy outlooks, *Sci. Total Environ.*, 757, 143919, doi:10.1016/j.scitotenv.2020.143919, 2021.
- 385 Mialhe, F., Gunnell, Y., Navratil, O., Choi, D., Sovann, C., Lejot, J., Gaudou, B., Se, B. and Landon, N.: Spatial growth of Phnom Penh, Cambodia (1973–2015): Patterns, rates, and socio-ecological consequences, *Land use policy*, 87, 104061, doi:10.1016/j.landusepol.2019.104061, 2019.
- Milliman, J. D. and Farnsworth, K. L.: *River discharge to the coastal ocean*, Cambridge, UK., 2011.
- MRC: *The Flow of the Mekong*, 2009.
- 390 Nittrouer, J. A., Allison, M. A. and Campanella, R.: Bedform transport rates for the lowermost Mississippi River, *J. Geophys. Res. Earth Surf.*, 113(3), 1–16, doi:10.1029/2007JF000795, 2008.
- Nuon, V., Lek, S., Ngor, P. B., So, N. and Grenouillet, G.: Fish Community Responses to Human-Induced Stresses in the Lower Mekong Basin, *Water*, 12(12), 3522, doi:10.3390/w12123522, 2020.
- Park, E., Loc Ho, H., Tran, D. D., Yang, X., Alcantara, E., Merino, E. and Son, V. H.: Dramatic decrease of flood frequency
395 in the Mekong Delta due to river-bed mining and dyke construction, , doi:10.1016/j.scitotenv.2020.138066, 2020.
- Peduzzi, P.: Sand, rarer than one thinks, *Environ. Dev.*, 11(March), 208–218, doi:10.1016/j.envdev.2014.04.001, 2014.
- Planet Team (2018). *Planet Application Program Interface: In Space for Life on Earth*. San Francisco, CA.
<https://api.planet.com>.
- Räsänen, T. A., Someth, P., Lauri, H., Koponen, J., Sarkkula, J. and Kummu, M.: Observed river discharge changes due to
400 hydropower operations in the Upper Mekong Basin, *J. Hydrol.*, 545, 28–41, doi:10.1016/J.JHYDROL.2016.12.023, 2017.
- Schmitt, R. J. P., Rubin, Z. and Kondolf, G. M.: Losing ground - scenarios of land loss as consequence of shifting sediment budgets in the Mekong Delta, , doi:10.1016/j.geomorph.2017.04.029, 2017.
- Torres, A., Brandt, J., Lear, K. and Liu, J.: A looming tragedy of the sand commons, *Science (80-.)*, 357(6355), 970–971, doi:10.1126/science.aao0503, 2017.
- 405 UNEP: *Sand and Sustainability: Finding New Solutions for Environmental Governance of Global Sand Resources*. [online] Available from: <https://wedocs.unep.org/handle/20.500.11822/28163>, 2019.
- Walling, D. E. and Fang, D.: Recent trends in the suspended sediment loads of the world's rivers, *Glob. Planet. Change*, 39(1–2), 111–126, doi:10.1016/S0921-8181(03)00020-1, 2003.
- Xin, W. and Park, E.: Shrinking Tonlé Sap and the recent intensification of sand mining in the Cambodian Mekong River, *Sci. Total Environ.*, 777, 146180, doi:10.1016/j.scitotenv.2021.146180, 2021.
- 410

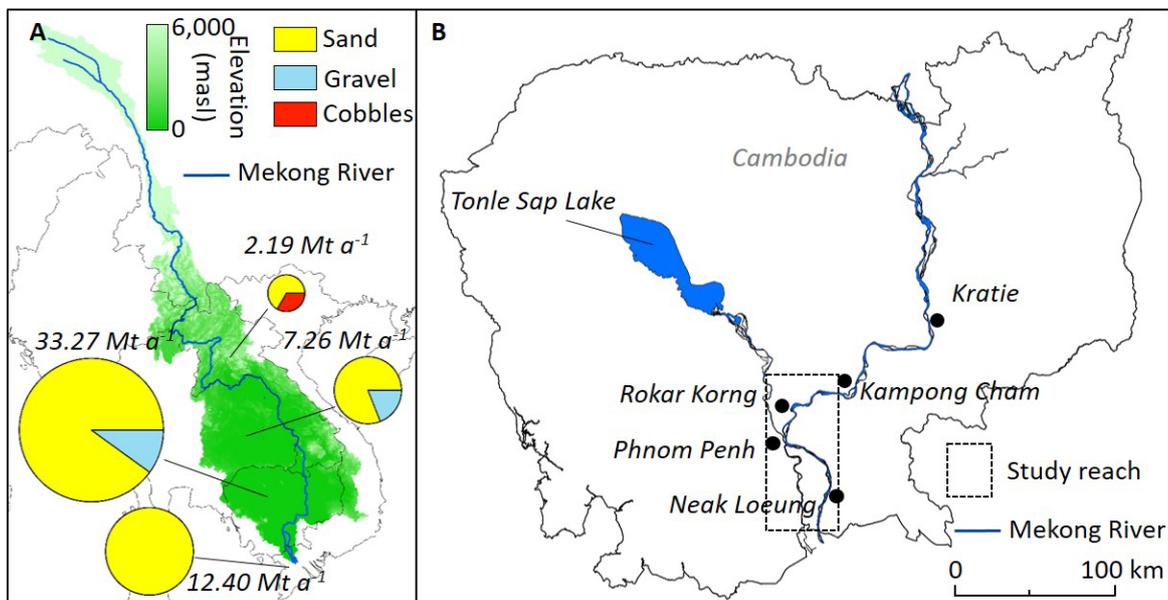


415 **Figure 1:** A) Established sediment extraction rates (Mt yr^{-1}) across the Mekong River basin in 2013. The composition and volume of material extracted are disaggregated by basin country taken from Bravard et al. (2013). The size of the pie charts scales with the volume extracted. B) Location of the study reach in Cambodia (dashed box) from Kampong Cham to the Vietnamese border.

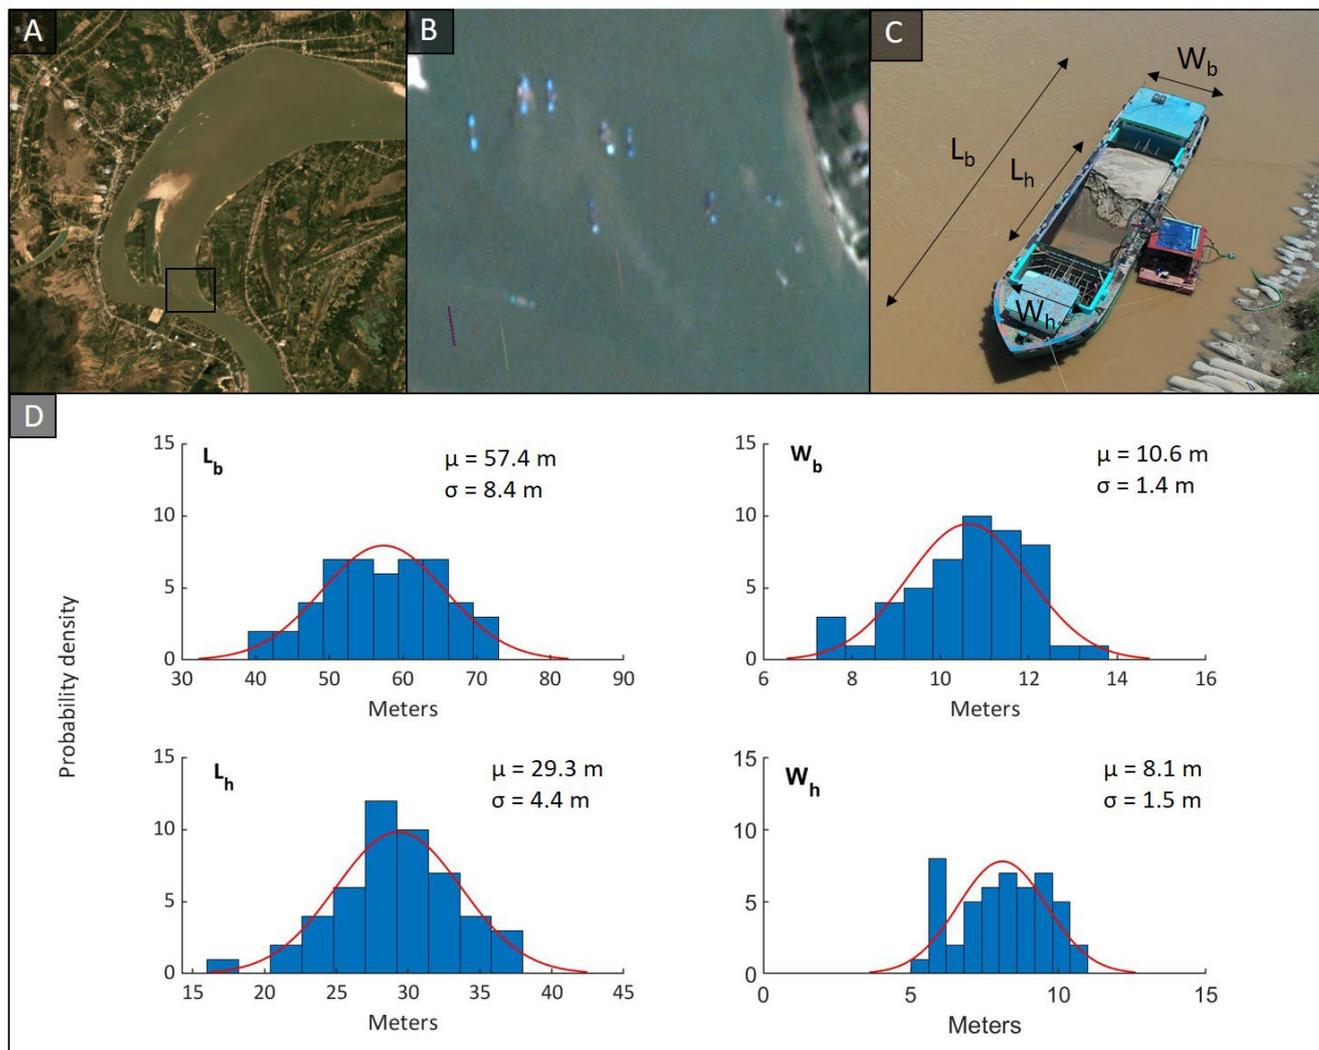


420 **Figure 2: A) Example PlanetScope monthly composite image of a stretch of the Mekong river from December 2018 (Planet Team, 2018). The square highlights the area depicted in panel B. B) Zoomed in area of PlanetScope imagery (Planet Team, 2018) for the Mekong showing how mining vessels are identifiable within the satellite imagery. C) Dimensions of mining vessels recorded including the boat length (L_b), the boat width (W_b), the hold length (L_h) and the hold width (W_h). These latter two dimensions are important for the calculation of extraction volumes as they define the volume of sand each boat can transport when fully laden. Image is the authors own. D) Estimated dimensions of the mining vessels active on the Mekong taken from Google Earth imagery. 50 boats were measured and dimensions were recorded as depicted in panel C.**

425

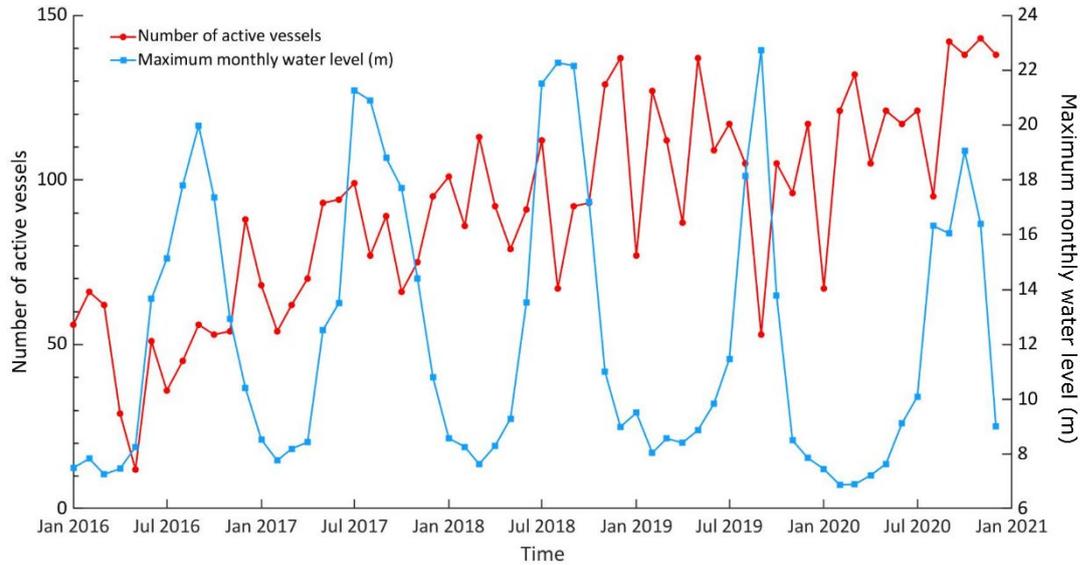


430 **Figure 3: The number of active vessels (vessels greater than 100 m from the riverbank) identified in each monthly composite image over the period January 2016 to December 2020 (red) and the maximum water level (m) at Kratie in each month over the same period.**

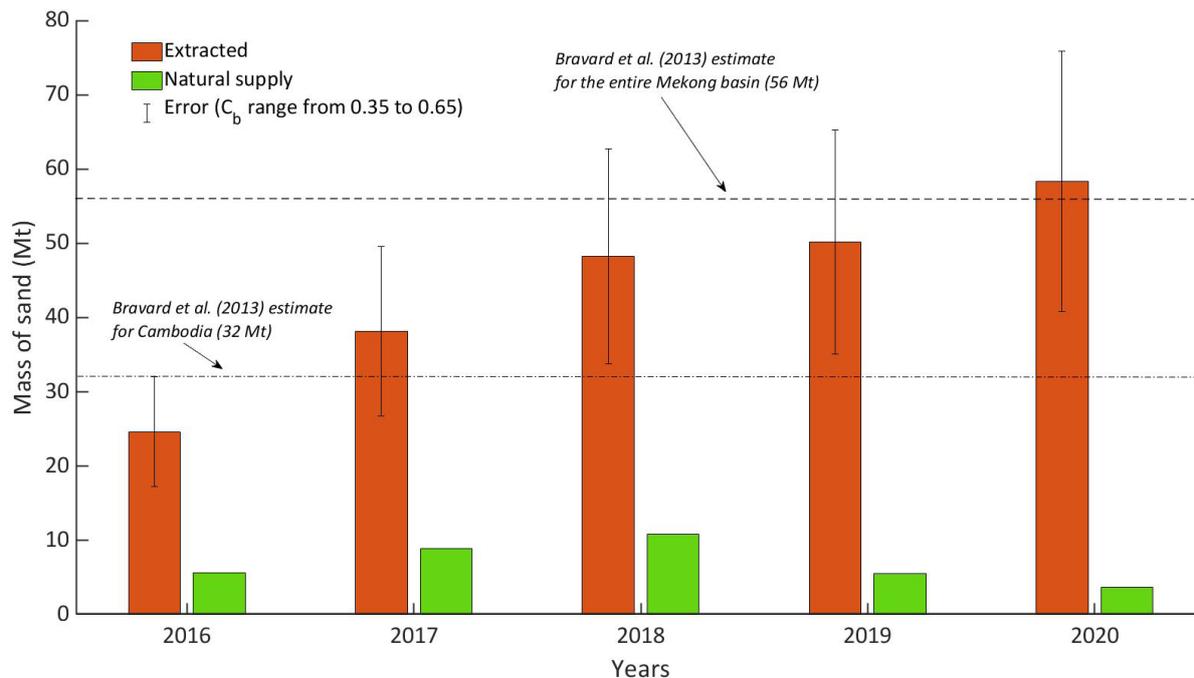


435

Figure 4: Volume of sand extracted each year for the period 2016 to 2020 (orange bars) for the study reach in Cambodia between Kampong Cham and the Vietnamese border. Error bars represent annual volumes calculated under varying levels of the compaction factor, C_b , from 0.35 to 0.65 (see section 2.3 for details). Green bars represent the annual volume of sand supply transported naturally by riverine processes at Kratie, Cambodia. The mass of sand extracted from Cambodia in 2013 as estimated by Bravard et al. (2013) is demarked by the dash-dot line at 32 Mt, similarly the estimated mass of sand extracted from the entire Mekong basin in 2013 is demarked by the dashed line (56 Mt).

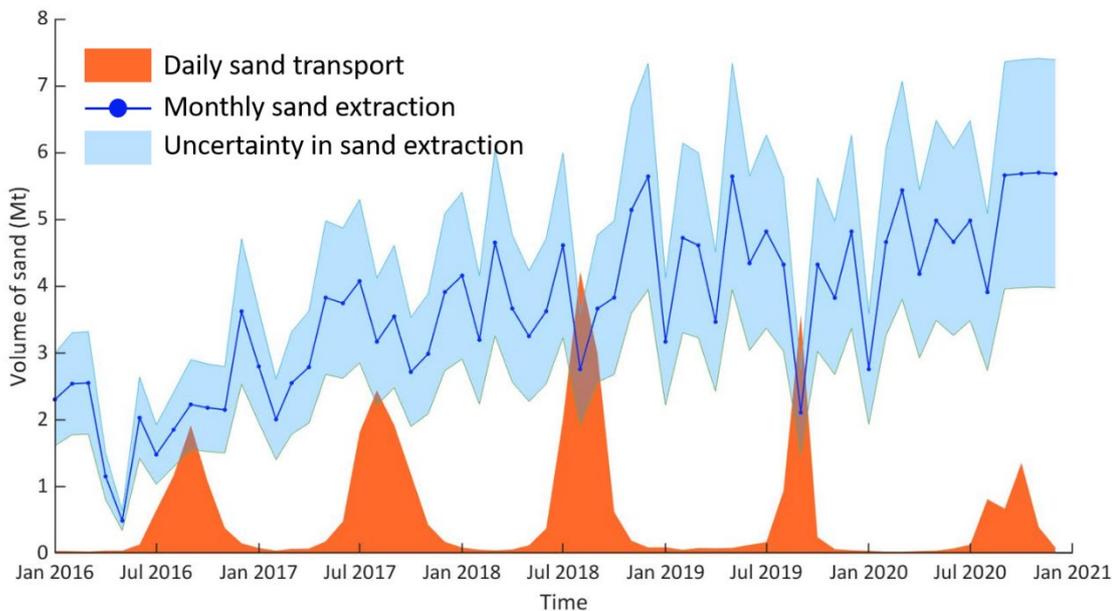


440

Figure 5: Monthly volumes of sand extraction (Mt) estimated from the number of vessels visible in the satellite imagery over the period 2016 to 2020 (blue) with error estimates defined by adjusting the compaction coefficient, C_b , between 0.35 and 0.65 (blue shaded area). Daily natural sand transport (Mt) at Kratie (see section 2.4 for details) for the same period is depicted by the shaded orange area.

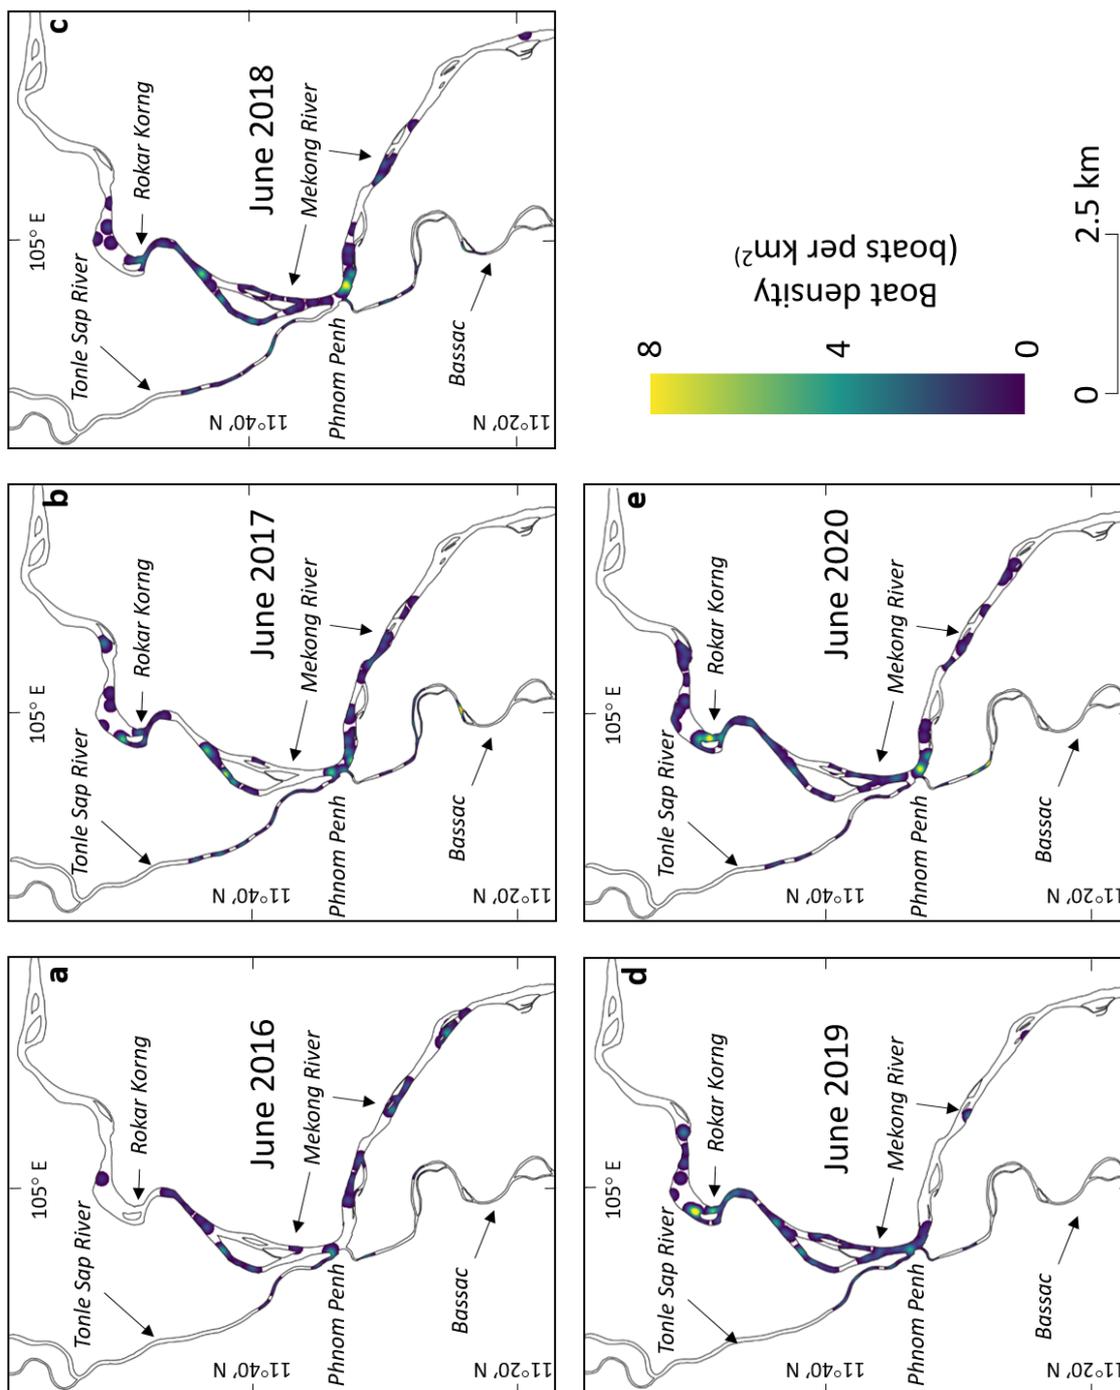

445

Figure 6: Annual heat maps for June for the period 2016 - 2020 of the Mekong River around Phnom Penh showing the locations of mining activity and the density of boats (boats per km²) showing changes in the spatial distribution of mining activity over the five year period.

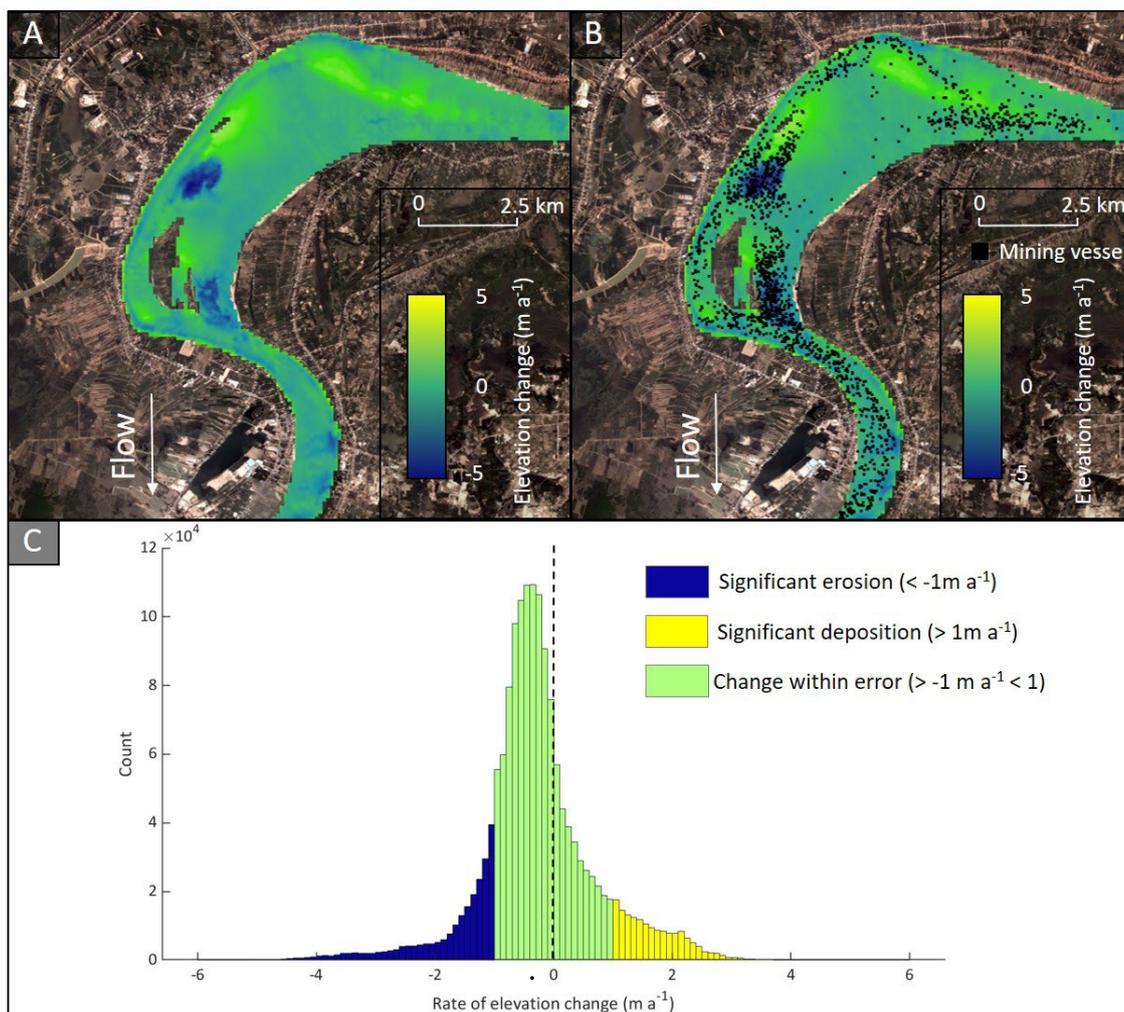

450 Figure 7: A) Rate of elevation change between 2013 and 2019 of the Mekong River near Rokar Korng highlighting areas of erosion
(blue) and deposition (yellow). B) Overlain on the map depicted in A are the locations of all observed mining vessels during the
period 2016 to 2020 demonstrating that the zones of greatest erosion observed in A correspond to areas of high mining activity. C)
Histogram of elevation changes for this reach between 2013 and 2019. The median rate of bed elevation is -0.25 m yr^{-1} (mean elevation
change is -0.16 m yr^{-1}). The dashed line demarks zero net change in elevation. Image background in panels A and B are PlanetScope
455 monthly composite scenes from December 2020 (Planet Team, 2018).