



# Linear stability analysis of plane beds under flows with suspended load

Koji Ohata<sup>1</sup>, Hajime Naruse<sup>1</sup>, and Norihiro Izumi<sup>2</sup>

<sup>1</sup>Division of Earth and Planetary Sciences, Graduate School of Science, Kyoto University, Japan

<sup>2</sup>Division of Field Engineering for the Environment, Faculty of Engineering, Hokkaido University, Japan

**Correspondence:** Koji Ohata (ohata.koji.24z@gmail.com)

**Abstract.** Plane beds develop under flows in fluvial and marine environments; they are recorded as parallel lamination in sandstone beds, such as those found in turbidites. However, whereas turbidites typically exhibit parallel lamination, they rarely feature dune-scale cross lamination. Although the reason for the scarcity of dune-scale cross-lamination in turbidites is still debated, the formation of dunes may be dampened by suspended load. Here, we perform, for the first time, linear stability analysis to show that flows with suspended load facilitate the formation of plane beds. For a fine-grained bed, suspended load can promote the formation of plane beds and dampen the formation of dunes. These results of theoretical analysis were verified with observational data of plane beds under open-channel flows. Our theoretical analysis found that suspended load promotes the formation of plane beds, which suggests that the development of dunes under turbidity currents is suppressed by the presence of suspended load.

## 10 1 Introduction

The interactions between fluids and erodible surfaces generate small-scale topographic features called bedforms both on terrestrial surfaces (e.g., riverbeds, deserts, and deep-sea floors) and on extra-terrestrial surfaces (Bourke et al., 2010; Gao et al., 2015; Hage et al., 2018; Cisneros et al., 2020). Such bedforms are preserved in sedimentary rocks as sedimentary structures such as cross- and parallel lamination (Harms, 1979). The types of sedimentary structures observed vary among different types of rocks. Turbidites typically exhibit parallel lamination (Bouma, 1962), whereas they rarely feature dune-scale cross-lamination (Talling et al., 2012). However, the opposite is true for fluvial deposits; i.e., dune-scale cross laminae are often observed in riverine sandstone (Miall, 2010).

Although the reason for the paucity of dune-scale cross-lamination in turbidites is still debated (Lowe, 1988; Arnott, 2012; Schindler et al., 2015; Tilston et al., 2015), it could be attributed to the presence of suspended load. For example, in the case of open-channel flows, nearly flat bed waves and low-angle dunes have been observed in suspension-dominated rivers (Smith and McLean, 1977; Kostaschuk and Villard, 1996; Bradley et al., 2013; Ma et al., 2017). Additionally, flume experiments have suggested that dune height decreases with increasing suspended load flux (Bridge and Best, 1988; Naqshband et al., 2017). Therefore, the influence of suspended load on the suppression of dune development and the formation of plane beds is worth investigating.



25 The relationships between sediment transport modes and the formation of plane beds have received little attention in theoretical works that performed linear stability analyses. The reason could be because previous studies have succeeded in predicting the wavelength of dunes and antidunes without considering suspended load (Colombini, 2004; Di Cristo et al., 2006; Colombini and Stocchino, 2008; Vesipa et al., 2012; Bohorquez et al., 2019). However, this assumption is not appropriate for analyzing open-channel flows where the suspended load is not negligible, such as flows in rivers with a fine sediment bed (de Almeida et al., 2016; Sambrook Smith et al., 2016). Moreover, although some research has considered both bed- and suspended load (Engelund, 1970; Nakasato and Izumi, 2008; Bose and Dey, 2009), the hydraulic conditions of these analyses were limited, and the results were tested using only observational data of dunes and antidunes.

Therefore, in order to investigate the effect of sediment transport mode on the formation of plane beds, we performed a linear stability analysis of bedforms under open-channel flows carrying suspended load. The model introduced in Nakasato and Izumi (2008) was extended in this study to evaluate plane bed formation under various conditions of sediment diameter and flow depth. To evaluate the suspended load effect, linear stability analyses were performed on flows both with and without suspended load. Further, we tested our stability diagrams against observational data of plane beds. Our theoretical analysis reveals for the first time that suspended load promotes the formation of plane beds, which has implications for interpreting sedimentary structures in turbidites.

## 40 2 Methods

Linear stability analysis of fluvial bedforms can provide the wavelengths of perturbations (i.e., bed waves) that grow over time (Colombini, 2004; Bohorquez et al., 2019). We employ the two-dimensional Reynolds-averaged Navier-Stokes equations as the governing equations for flows and the quasi-steady assumption to neglect the unsteady terms in the flow equations. The eddy viscosity is evaluated using a mixing-length approach. In this study, bed-load discharge is estimated using the Meyer-Peter and Müller formula modified as described in Wong and Parker (2006). The entrainment rate of suspended load is estimated using the relationship proposed in de Leeuw et al. (2020). See the following section for details. To test the results of linear stability analyses against the observational data of plane beds, we plotted stability diagrams in the parametric space of hydraulic parameters.

### 2.1 Governing Parameters

50 The instability of a system is illustrated as a contour diagram of the perturbation growth rate  $\omega_i$  (Fig. 1). Generally, theoretical studies of bedforms based on linear stability analyses describe the transition of bedform phases in the parametric space of wavenumber  $k$  and Froude number  $Fr$ , which are given by:

$$k = \frac{2\pi\tilde{h}_0}{\tilde{\lambda}} \quad (1)$$

$$Fr = \frac{\tilde{U}_0}{\sqrt{\tilde{g}\tilde{h}_0}} \quad (2)$$



55 where  $\tilde{\lambda}$  denotes the perturbation wavelength,  $\tilde{U}_0$  is the depth-averaged flow velocity of the uniform flow,  $\tilde{g}$  is the gravitational acceleration ( $= 9.81 \text{ m}^2/\text{s}$ ), and  $\tilde{h}_0$  is the flow depth of the uniform flow. Hereafter, we denote dimensional variables using a tilde ( $\tilde{\cdot}$ ).

Stability diagrams described on the  $k$ -Fr plane have been commonly used to predict the development of dunes and antidunes (Kennedy, 1963). A few studies have used other combinations of dimensionless numbers such as the friction coefficient  $C$  versus Fr (Colombini and Stocchino, 2008) and the relative roughness  $\tilde{D}/\tilde{h}_0$  on the  $k$ -Fr plane (Bohorquez et al., 2019).

Although the classic  $k$ -Fr diagrams are widely accepted, we cannot use this approach to evaluate whether plane bed formation can be predicted reliably because plane beds have extremely small wavenumber or have an infinite wavelength (i.e., they are flat). Therefore, we illustrate stability diagrams as contour maps of dominant wavenumber  $k_d$  on the  $\tilde{D}/\tilde{h}_0$ -Fr plane with fixed  $\tilde{D}$  and the  $\text{Re}_p$ -Fr plane with fixed  $\tilde{h}_0$  to investigate the impact of suspended load on the formation of plane beds, where the dominant wavenumber  $k_d$  denotes the wavenumber that provides maximum growth rate.

The instability of a system is illustrated as a contour diagram of the perturbation growth rate  $\omega_i$  (Fig. 1). We can rewrite Eq. (A30) as:

$$\omega = \omega(k, \text{Fr}, \tilde{D}, \tilde{h}_0) \quad (3)$$

Thus, we can obtain the growth rate  $\omega_i$  as a function of  $k$  for a given combination of  $(\text{Fr}, \tilde{D}, \tilde{h}_0)$ . In this study, we assume that the system is stable if  $\omega_i$  is not positive for all  $k$  within the domain  $[k_{\min}, k_{\max}]$  for a given  $(\text{Fr}, \tilde{D}, \tilde{h}_0)$  combination. In contrast, the system is assumed to be unstable if  $\omega_i$  is positive for some  $k$  (Fig. 1). We describe stability diagrams as contour maps of  $k_d$  in the parametric space of  $(\text{Fr}, \tilde{D}/\tilde{h}_0)$  (Figs. 2 and 3) and  $(\text{Fr}, \text{Re}_p)$  (Figs. 4 and 5).

Therefore, we employed (1) two grades of fine particles ( $\tilde{D} = 0.12$  and  $0.25$  mm) and one grade of coarse particles ( $\tilde{D} = 1.2$  mm) and (2) two grades of shallow flow depth ( $\tilde{h}_0 = 0.15$  and  $0.30$  m) and one grade of deep flow depth ( $\tilde{h}_0 = 1.0$  m) to investigate the effect of suspension on the bed instability. The Froude number, particle diameter, and flow depth range from 0.01 to 2, 0.125 mm to 4 mm, and 1 cm to 5.0 m, respectively. The domain  $[k_{\min}, k_{\max}]$  was set as  $[0.01, 1.5]$ , corresponding to  $\lambda$  ranging from  $\sim 4.2h$  to  $\sim 628h$ .

## 2.2 Linear Stability Analysis

Here we present the formulation of the problem and the method used to solve the differential equations.

### 2.2.1 Flow equations

The governing equations for flows are the two-dimensional Reynolds-averaged Navier-Stokes equations. On erodible beds, the flow adjustments occur immediately relative to the bed adjustments (Fourrière et al., 2010). Therefore, we employ the quasi-steady assumption to neglect the unsteady terms in the flow equations (Colombini, 2004; Yokokawa et al., 2016).



Under the quasi-steady assumption, the dimensionless forms of the Reynolds-averaged Navier-Stokes equations and continuity equation for incompressible flow are described as:

$$u \frac{\partial u}{\partial x} + w \frac{\partial u}{\partial z} = -\frac{\partial p}{\partial x} + 1 + \frac{\partial T_{xx}}{\partial x} + \frac{\partial T_{xz}}{\partial z} \quad (4)$$

$$u \frac{\partial w}{\partial x} + w \frac{\partial w}{\partial z} = -\frac{\partial p}{\partial z} + S^{-1} + \frac{\partial T_{xz}}{\partial x} + \frac{\partial T_{zz}}{\partial z} \quad (5)$$

$$\frac{\partial u}{\partial x} + \frac{\partial w}{\partial z} = 0 \quad (6)$$

where  $u$  and  $w$  are the flow velocities in  $x$ - and  $z$ - direction, respectively;  $p$  denotes the pressure;  $S$  is the bed slope; and  $T_{ij}$  ( $i, j = x, z$ ) is the Reynolds stress tensor.

We employ a Boussinesq-type assumption to close the flow equations:

$$T_{xx} = 2\nu_T \frac{\partial u}{\partial x} \quad (7)$$

$$T_{zz} = 2\nu_T \frac{\partial w}{\partial z} \quad (8)$$

$$T_{xz} = \nu_T \left( \frac{\partial u}{\partial z} + \frac{\partial w}{\partial x} \right) \quad (9)$$

Then, the eddy viscosity  $\nu_T$  is evaluated using a mixing-length approach:

$$\nu_T = l^2 \left| \frac{\partial u}{\partial z} \right| \quad (10)$$

$$l = \kappa(z - Z) \sqrt{\frac{h + R - z}{h}} \quad (11)$$

where  $l$  is the mixing length,  $\kappa$  is the Kármán coefficient ( $= 0.4$ ),  $h$  is the flow depth,  $Z$  denotes the bed height, and  $R$  is the height of the reference level at which the flow velocity is assumed to vanish in a logarithmic profile (Fig. A1).

In the above equations, the system is nondimensionalized as follows:

$$(u, w) = (\tilde{u}, \tilde{w}) / \tilde{u}_{f0} \quad (12)$$

$$(x, z, h, Z, R, D) = (\tilde{x}, \tilde{z}, \tilde{h}, \tilde{Z}, \tilde{R}, \tilde{D}) / \tilde{h}_0 \quad (13)$$

$$(p, T_{ij}) = (\tilde{p}, \tilde{T}_{ij}) / \tilde{\rho} \tilde{h}_0 \quad (14)$$

$$\nu_T = \tilde{\nu}_T / (\tilde{u}_{f0} \tilde{h}_0) \quad (15)$$

where  $D$  is the non-dimensional diameter of a bed particle,  $\tilde{u}_{f0}$  denotes the shear velocity in the basic flat-bed state, and  $\tilde{\rho}$  is the water density ( $= 1000 \text{ kg/m}^3$ ). The shear velocity in the basic flat-bed state  $\tilde{u}_{f0}$  is obtained as:

$$\tilde{u}_{f0} = \sqrt{\tilde{g} \tilde{h}_0 S} \quad (16)$$

As the flow is continuous, the system can be rewritten using the stream function  $\psi$  defined as:

$$(u, w) = \left( \frac{\partial \psi}{\partial z}, -\frac{\partial \psi}{\partial x} \right) \quad (17)$$



110 Then, Eqs. (4) and (5) are rearranged to:

$$\frac{\partial\psi}{\partial z} \frac{\partial^2\psi}{\partial x\partial z} - \frac{\partial\psi}{\partial x} \frac{\partial^2\psi}{\partial z^2} = -\frac{\partial p}{\partial x} + 1 + \frac{\partial}{\partial x} \left( 2\nu_T \frac{\partial^2\psi}{\partial x\partial z} \right) + \frac{\partial}{\partial z} \left[ \nu_T \left( \frac{\partial^2\psi}{\partial z^2} - \frac{\partial^2\psi}{\partial x^2} \right) \right] \quad (18)$$

$$\frac{\partial\psi}{\partial x} \frac{\partial^2\psi}{\partial x\partial z} - \frac{\partial\psi}{\partial z} \frac{\partial^2\psi}{\partial x^2} = -\frac{\partial p}{\partial z} + S^{-1} - \frac{\partial}{\partial z} \left( 2\nu_T \frac{\partial^2\psi}{\partial x\partial z} \right) + \frac{\partial}{\partial x} \left[ \nu_T \left( \frac{\partial^2\psi}{\partial z^2} - \frac{\partial^2\psi}{\partial x^2} \right) \right] \quad (19)$$

115 Eliminating  $p$  from Eqs. (18) and (19), we obtain:

$$\frac{\partial\psi}{\partial z} \frac{\partial}{\partial x} \nabla^2\psi - \frac{\partial\psi}{\partial x} \frac{\partial}{\partial z} \nabla^2\psi - 4 \frac{\partial^2}{\partial x\partial z} \left( \nu_T \frac{\partial^2\psi}{\partial x\partial z} \right) + \left( \frac{\partial^2}{\partial x^2} - \frac{\partial^2}{\partial z^2} \right) \left[ \nu_T \left( \frac{\partial^2}{\partial z^2} - \frac{\partial^2}{\partial x^2} \right) \psi \right] = 0 \quad (20)$$

### 2.2.2 Advection-diffusion equations for suspended sediment

We also assume a quasi-steady state for the advection-diffusion equation for suspended sediment, which is formulated as:

$$120 \frac{\partial F_x}{\partial x} + \frac{\partial F_z}{\partial z} = 0 \quad (21)$$

Here,  $F_x$  and  $F_z$  are the normalized fluxes of suspended sediment in  $x$ - and  $z$ - directions, respectively, given by:

$$F_x = uc - \nu_T \frac{\partial c}{\partial x} \quad (22)$$

$$F_z = (w - w_s)c - \nu_T \frac{\partial c}{\partial z} \quad (23)$$

125 where  $c$  denotes the concentration of suspended sediment and  $w_s$  is the settling velocity of sediment. We assume that the diffusion coefficient of suspended sediment is equal to the eddy viscosity  $\nu_T$ . Based on Eqs. (22) and (23), Eq. (21) is reformulated as:

$$u \frac{\partial c}{\partial x} + (w - w_s) \frac{\partial c}{\partial z} = \frac{\partial}{\partial x} \left( \nu_T \frac{\partial c}{\partial x} \right) + \frac{\partial}{\partial z} \left( \nu_T \frac{\partial c}{\partial z} \right) \quad (24)$$

The settling velocity of sediment  $w_s$  is calculated using a relationship given in Ferguson and Church (2004):

$$w_s = \frac{\tilde{w}_s}{\sqrt{R_s \tilde{g} \tilde{D}}} \quad (25)$$

$$130 \tilde{w}_s = \frac{R_s \tilde{g} \tilde{D}^2}{C_1 \tilde{\nu} + 0.75 C_2 \sqrt{R_s \tilde{g} \tilde{D}^3}} \quad (26)$$

where the constants  $C_1$  and  $C_2$  are set to the values for natural sand:  $C_1 = 18$  and  $C_2 = 1.0$ .



The particle Reynolds number  $Re_p$  is defined as:

$$Re_p = \frac{\sqrt{R_s \tilde{g} \tilde{D}^3}}{\tilde{\nu}} \quad (27)$$

where  $R_s$  is the submerged specific density and  $\tilde{\nu}$  is the kinematic viscosity of the fluid ( $= 1.0 \times 10^{-6} \text{ m}^2/\text{s}$ ). The submerged  
 135 specific density  $R_s$  is defined as:

$$R_s = \frac{\tilde{\rho}_s - \tilde{\rho}}{\tilde{\rho}} \quad (28)$$

where  $\tilde{\rho}_s$  denotes the density of the bed particles ( $= 2650 \text{ kg}/\text{m}^3$ ).

### 2.2.3 Transformation of variables

We employ the following transformation of variables to apply the boundary condition at the bed and flow surfaces:

$$140 \quad \xi = x \quad (29)$$

$$\eta = \frac{z - R(x)}{h(x)} \quad (30)$$

The derivatives with respect to  $x$  and  $z$  are described as follows:

$$\frac{\partial}{\partial x} = \frac{\partial}{\partial \xi} - \frac{\eta \partial_x h + \partial_x R}{h} \frac{\partial}{\partial \eta} \quad (31)$$

$$\frac{\partial}{\partial z} = \frac{1}{h} \frac{\partial}{\partial \eta} \quad (32)$$

145 where  $\partial_x$  denotes the partial derivative with respect to  $x$ . Using the above transformation of variables approach, the height of the water surface and the reference level correspond to  $\eta = 1$  and  $\eta = 0$ , respectively.

Additionally, the dimensionless mixing length  $l$  (Eq. (11)) is rearranged as:

$$l = \kappa(h\eta + R - Z) \sqrt{\frac{1 - \eta}{1 + (R - Z)/h}} \quad (33)$$

Since  $(R - Z)/h \ll 1$ , then we can obtain:

$$150 \quad l = \kappa(h\eta + R - Z) \sqrt{1 - \eta} \quad (34)$$

### 2.2.4 Boundary condition

The boundary conditions include a vanishing flow component normal to the water surface, and vanishing stresses normal and tangential to the water surface as follows:

$$\left. \begin{aligned} \mathbf{u} \cdot \mathbf{e}_{ns} &= 0 \\ \mathbf{e}_{ns} \cdot \mathbf{T} \cdot \mathbf{e}_{ns} &= 0 \\ \mathbf{e}_{ts} \cdot \mathbf{T} \cdot \mathbf{e}_{ns} &= 0 \end{aligned} \right\} \text{ at } \eta = 1 \quad (35)$$



155 where  $\mathbf{u} = (u, w)$  is the velocity vector,  $\mathbf{e}$  denotes the unit vector, and  $\mathbf{T}$  is the stress tensor. The subscripts ns and ts denote directions normal and tangential to the water surface, respectively.

At the bed, the boundary conditions include the vanishing flow components normal and tangential to the bed.

$$\left. \begin{aligned} \mathbf{u} \cdot \mathbf{e}_{\text{nb}} &= 0 \\ \mathbf{u} \cdot \mathbf{e}_{\text{tb}} &= 0 \end{aligned} \right\} \text{ at } \eta = 0 \quad (36)$$

160 where the subscripts nb and tb denote directions normal and tangential to the bed, respectively. The vectors  $\mathbf{e}_{\text{ns}}$ ,  $\mathbf{e}_{\text{ts}}$ ,  $\mathbf{e}_{\text{nb}}$ , and  $\mathbf{e}_{\text{tb}}$ , and the tensor  $\mathbf{T}$  are defined as:

$$\mathbf{e}_{\text{ns}} = \frac{1}{\sqrt{1 + \partial_x(R+h)^2}} \left( -\partial_x(R+h), 1 \right) \quad (37)$$

$$\mathbf{e}_{\text{ts}} = \frac{1}{\sqrt{1 + \partial_x(R+h)^2}} \left( 1, \partial_x(R+h) \right) \quad (38)$$

$$\mathbf{e}_{\text{nb}} = \frac{1}{\sqrt{1 + \partial_x R^2}} \left( -\partial_x R, 1 \right) \quad (39)$$

$$\mathbf{e}_{\text{tb}} = \frac{1}{\sqrt{1 + \partial_x R^2}} \left( 1, \partial_x R \right) \quad (40)$$

$$165 \quad \mathbf{T} = \begin{pmatrix} -p + T_{xx} & T_{xz} \\ T_{xz} & -p + T_{zz} \end{pmatrix} \quad (41)$$

The boundary conditions for the suspended sediment flux at the flow surface and bed are as follows:

$$\mathbf{F} \cdot \mathbf{e}_{\text{ns}} = 0 \quad \text{at } \eta = 1 \quad (42)$$

$$\mathbf{F} \cdot \mathbf{e}_{\text{nb}} = \frac{\tilde{E}_s}{\tilde{u}_{f0}} \quad \text{at } \eta = 0 \quad (43)$$

170 where  $\mathbf{F} = (F_x, F_z)$  is the flux vector of suspended sediment and  $\tilde{E}_s$  is the entrainment rate of the sediment calculated as  $\tilde{E}_s = \tilde{w}_s E_s$ . In this study, the dimensionless coefficient  $E_s$  is estimated using the relationship proposed in de Leeuw et al. (2020):

$$E_s = C_3 \left( \frac{u_f}{w_s} \right)^{e_1} \text{Fr}^{e_2} \text{Re}_p^{e_3} \quad (44)$$

where  $C_3$  was set to  $5.73 \times 10^{-3}$  and coefficients  $e_1$ ,  $e_2$ , and  $e_3$  were set to 1.31, 1.59, and  $-0.86$ , respectively.

### 2.2.5 Basic state

175 The basic flow state for linear stability analysis is a uniform flow over a flat bed. Under this condition, the hydraulic parameters  $u$ ,  $w$ ,  $h$ ,  $Z$ ,  $R$ , and  $c$  are described as:

$$(u, w, h, Z, R, c) = (u_0(\eta), 0, 1, 0, R_0, c_0(\eta)) \quad (45)$$



where the subscript 0 denotes a parameter in the basic state. The governing equations of flows can be simplified as:

$$1 + \frac{\partial T_{xy0}}{\partial \eta} = 0 \quad (46)$$

$$180 \quad T_{xy0} = \nu_{T0} \frac{\partial u_0}{\partial \eta} \quad (47)$$

$$\nu_{T0} = l_0^2 \frac{\partial u_0}{\partial \eta} \quad (48)$$

$$l_0 = \kappa(\eta + R_0) \sqrt{1 - \eta} \quad (49)$$

with the boundary conditions:

$$u_0 = 0, T_{xy0} = 1 \quad \text{at} \quad \eta = 0 \quad (50)$$

185 With Eqs. (46)–(50), we can obtain the following logarithmic law for the flow velocity:

$$u_0(\eta) = \frac{1}{\kappa} \ln \left( \frac{\eta + R_0}{R_0} \right) \quad (51)$$

Then, the friction coefficient  $C_z$  is obtained by the direct integration of Eq. (51) from  $\eta = 0$  to  $\eta = 1$ :

$$C_z = \frac{\tilde{U}_0}{\tilde{u}_{f0}} = \frac{1}{\kappa} \left[ (1 + R_0) \ln \left( \frac{1 + R_0}{R_0} \right) - 1 \right] \quad (52)$$

Now, we consider the logarithmic law of the open-channel flows as:

$$190 \quad u = \frac{1}{\kappa} \ln \left( \frac{z}{z_0} \right) \quad (53)$$

with  $z_0 = D/12$  (Colombini, 2004). It should be noted here that the bed roughness can be modified by the sediment transport (Dietrich and Whiting, 1989). Additionally, we set the origin of  $z$ -axis at a distance of  $D/6$  below the top of the bed particles (Fig. A2). By setting the top of the bed particles as  $z = D/6$ , the reference level  $R_0$  is positioned below the top of bed particles. Therefore, the domain in which the mixing-length approach cannot be applied is restricted near the bed.

195 Under the above uniform flow condition over a flat bed, Eq. (24) can be rewritten as:

$$-w_s \frac{\partial c_0}{\partial \eta} = \frac{\partial}{\partial \eta} \left( \nu_{T0} \frac{\partial c_0}{\partial \eta} \right) \quad (54)$$

with the following boundary conditions:

$$w_s c_0 + \nu_{T0} \frac{\partial c_0}{\partial \eta} = 0 \quad \text{at} \quad \eta = 1 \quad (55)$$

$$c_0 = c_b \quad \text{at} \quad \eta = 0 \quad (56)$$

200 Here,  $c_b$  is the near-bed concentration of suspended sediment. Under the basic state, the entrainment and deposition rates of the suspended sediment are balanced. Thus,  $c_b$  is described as:

$$c_b = E_{s0} \quad (57)$$

$$E_{s0} = C_3 \left( \frac{u_{f0}}{w_s} \right)^{e_1} Fr^{e_2} Re_p^{e_3} \quad (58)$$





where  $C_3$  was set to  $5.73 \times 10^{-3}$  and coefficients  $e_1$ ,  $e_2$ , and  $e_3$  were set to 1.31, 1.59, and  $-0.86$ , respectively.

205 By integrating Eq. (54), we obtain the suspended sediment distribution in the basic state as follows:

$$c_0(\eta) = c_b \left[ \frac{R_0(1-\eta)}{\eta + R_0} \right]^{w_s/\kappa(1+R_0)} \quad (59)$$

### 2.2.6 Temporal development of bed configurations

The development of the bed configuration can be described by the Exner equation considering the suspended load as follows:

$$(1 - \lambda_p) \frac{\partial \tilde{B}}{\partial \tilde{t}} + \alpha_b \frac{\partial \tilde{q}_B}{\partial \tilde{x}} + \alpha_s \tilde{w}_s (E_s - c_{[\xi, \eta_b]}) = 0 \quad (60)$$

210 where  $\lambda_p$  denotes the sediment porosity,  $\tilde{B}$  denotes the height of the bed-load layer,  $\tilde{t}$  is time, and  $\tilde{q}_B$  denotes the bed-load discharge per unit width. In the case without suspension, the development of the bed configuration associated with suspended load is ignored by setting the coefficient  $\alpha_s$  in Eq. (60) to 0. In the case of the stability analysis with suspension, the coefficient  $\alpha_s$  take a value of 0 or 1 depending on the sediment transport regime (Eq. (71)).

Equation (60) is nondimensionalized as:

$$215 \frac{\partial B}{\partial t} + \alpha_b \frac{\partial q_B}{\partial \xi} + \alpha_s \frac{w_s}{D} (E_s - c_{[\xi, \eta_b]}) = 0 \quad (61)$$

with

$$\tilde{t} = \frac{(1 - \lambda_p) \tilde{h}_0^2}{\sqrt{R_s g \tilde{D}^3}} t \quad (62)$$

In this study, dimensionless bed-load discharge per unit width is estimated using the Meyer-Peter and Müller formula modified as described in Wong and Parker (2006); this equation is given as:

$$220 q_B = \frac{\tilde{q}_B}{\sqrt{R_s g \tilde{D}^3}} = C_4 (\theta_b - \theta_c)^{e_4} \quad (63)$$

where  $C_4$  and  $e_4$  were set to 3.97 and 1.5, respectively. Here,  $\theta_b$  is the Shields stress at the top of bed-load layer and  $\theta_c$  is the critical Shields stress for particle motion. These variables can be expressed as follows:

$$\theta_0 = \frac{S}{R_s D} \quad (64)$$

$$\theta_b = \theta_0 \tau_b \quad (65)$$

$$225 \theta_c = \theta_{ch} - \mu \left( S - \frac{\partial B}{\partial x} \right) \quad (66)$$

where  $\theta_0$  is the Shields stress of the base flow,  $\tau_b$  denotes the shear stress at the top of the bed-load layer,  $\theta_{ch}$  denotes the critical Shields stress under the flat-bed conditions, and  $\mu$  is a constant set to 0.1 (Fredsoe, 1974). The shear stress  $\tau_b$  is described as:

$$\tau_b = [\mathbf{e}_{tb} \cdot \mathbf{T} \cdot \mathbf{e}_{nb}]_{\eta=\eta_b} \quad (67)$$



where  $\eta_b$  is the dimensionless thickness of the bed-load layer and is obtained as:

$$230 \quad \eta_b = B_0 - R_0 = h_b + \frac{D}{12} \quad (68)$$

where  $B_0$  and  $R_0$  denote the height of the top of the bed-load layer and the reference level in the basic state, respectively. According to Colombini (2004), the thickness of the bed-load layer  $h_b$  is estimated as follows:

$$h_b = l_b D \quad (69)$$

$$l_b = 1 + 1.3 \left( \frac{\tau_r - \tau_c}{\tau_c} \right)^{0.55} \quad (70)$$

235 where  $l_b$  denotes the relative saltation height,  $\tau_r$  is the shear stress at the reference level, and  $\tau_c$  is the critical shear stress.

In this study, the sediment transport regimes are classified using the threshold conditions of sediment motion in Brownlie (1981) as follows:

$$\theta_{ch} = 0.22 Re_p^{-0.6} + 0.06 \exp(-17.77 Re_p)^{-0.6} \quad (71)$$

The coefficients  $\alpha_b$  and  $\alpha_s$  in Eq. (60) were set to 0 when  $\theta_0 < \theta_{ch}$  and set to 1 when  $\theta_{ch} \leq \theta_0$ .

## 240 2.2.7 Linear Analysis

We impose an infinitesimal perturbation on the basic state. Then, with the use of boundary conditions, we can solve the differential equations to get the growth rate of the perturbation. Please see the appendix for details of linear analysis.

## 2.3 Compilation of published data

245 The stability diagrams were assessed using an observational dataset pertaining to open-channel flows compiled from the literature, as summarized in Tables A1–A6. We compiled from the literature a total of 269 sets of data for Figures 2 and 3 and 276 sets of data for Figures 4 and 5. The flow depth, the flow velocity, and particle diameter ranges from 0.02 to 19.5 m, 0.198 to 1.99 m/s, and 0.096 to 1.6 mm, respectively.

250 We used the data of plane beds in which the sediment transport mode could be identified, i.e., plane bed without suspension, with suspension, and with sheet flows. We identified whether sediment particles were transported as suspended load or not based on the suspended sediment concentration. Plane bed without sediment movement were not included in this analysis. For comparison with the theoretical analysis results, we used the data of dunes and antidunes with wavenumbers with the range  $0 < k \leq 1.5$  for comparison.

255 For Figures 2 and 3, the data of which sediment diameter range from  $0.74\tilde{D}$  to  $1.36\tilde{D}$  were chosen to plot on stability diagram, which corresponds to the range  $\log_{10} Re_p \pm 0.2$ . The data of which flow depth range from  $0.71\tilde{h}_0$  to  $1.41\tilde{h}_0$  were chosen to plot Figures 4 and 5. To calculate the particle Reynolds number, the kinematic viscosity  $\nu$  was assumed as follows (van den Berg and van Gelder, 1993):

$$\nu = \left[ 1.14 - 0.031(T - 15) + 0.00068(T - 15)^2 \right] 10^{-6} \quad (72)$$

where  $T$  represents the water temperature in degrees Celsius. A value of 20°C was assumed for data when  $T$  was not reported.



### 3 Results

#### 260 3.1 $\tilde{D}/\tilde{h}_0$ -Fr diagram

The contour maps of  $k_d$  on  $\tilde{D}/\tilde{h}_0$ -Fr plane show that the stable region, which denotes that hydraulic conditions where the plane bed appear, for fine sediments is larger in the diagram with suspension than in that without suspension (Fig. 2). A stable region appears at  $0.6 < Fr < 1.2$  and for  $h < 1.2$  m in the case of the stability analysis without suspension (Fig. 2a, c), and the dominant wavenumber increases with increasing flow depth. In the case of the stability analysis with suspension, Froude number and flow depth of the stable region ranges from 0.05 to 1.0 and from 0.01 to 5, respectively (Fig. 2b, d), while at 265  $Fr > 1$ , the dominant wavenumber can fall below 0.3 (Fig. 2b, d).

Comparing the results where  $\tilde{D} = 0.12$  mm and the observational data, in the case without suspension, all the plane bed data are within unstable region; most values plot in the region where  $k_d > 1$  (Fig. 2a). In contrast, all the plane bed data plot in the stable region in the case with suspension (Fig. 2b). When  $\tilde{D} = 0.25$  mm, the plane bed data without suspension plot below the 270 threshold of sediment motion (Fig. 2c, d). Moreover, although some observational data points of plane beds with suspension plot within the stable region in both diagrams, more data agree with the stable region in the case with suspension than in that without suspension (Fig. 2c, d). As expected, most dune and antidune data plot in the unstable region, whereas several data points of dunes and antidunes plot in the stable region in both cases with and without suspension (Fig. 2).

The stability diagrams considering flows with and without suspension for coarse sediment beds ( $\tilde{D} = 1.20$  mm) differ in the 275 region where  $Fr < 1$  (Fig. 3). Contrary to the case of fine sand, the unstable region is wider in the diagram with suspension than in that without suspension. The data of plane beds without suspended load plot just above the threshold of sediment motion (Fig. 3). The observational data of plane beds under sheet flows fall inside the unstable region where  $0.3 < k_d < 0.5$  and  $Fr > 1.6$  (Fig. 3).

#### 3.2 $Re_p$ -Fr diagram

280 The contour maps of  $k_d$  on  $Re_p$ -Fr plane show that the stable region is larger at  $Re_p < 20$  in the diagram with suspension than in that without suspension (Figs. 4 and 5). Comparing with the observational data, most plane bed data plot in the stable region in the case of the stability analysis with suspension (Figs. 4b, d and 5b), although some observational data points of plane beds with suspension plot within the unstable region. Figures 4 and 5 also show that most dune and antidune data plot in the unstable region.

### 285 4 Discussion

#### 4.1 Effect of suspension on fine sediment bed

The role of suspended load in the formation of plane beds and suppressing dune-scale instabilities is quantitatively illustrated as the broadening of the stable regions (Figs. 2, 4 and 5). The stability diagrams for fine sediment beds show a good agreement with



the observational data of plane beds under flows with suspension (Figs. 2b, d, 4b, d and 5b). The transition from dunes to plane  
290 beds has been explained by the spatial lag  $\delta$  between the bed topography and the local sediment transport rate (Naqshband et al.,  
2014; van Duin et al., 2017). If the bed topography and sediment transport rate are entirely in-phase ( $\delta = 0$ ), dunes migrate  
downstream without growth or decay. The dune height increases and decreases when the maximum sediment transport rate  
occurs upstream ( $\delta < 0$ ) and downstream ( $\delta > 0$ ) of the dune crest, respectively. Kennedy (1963) introduced the spatial lag in  
his flow model to account for the bedform growth and decay, and subsequent research has investigated the effect of spatial lag  
295 on the bedform development (McLean, 1990; van Duin et al., 2017). Recently, Naqshband et al. (2017) quantitatively observed  
the positive spatial lag under suspended load dominated flows in their flume experiments. Our analyses confirm that suspended  
load dampens the development of bed waves, thereby facilitating the formation of plane beds, and thus cannot be neglected in  
theoretical analyses for realistic predictions of bedforms.

We found that dunes are deformed under flows with suspended load, although further work is needed to investigate the  
300 amplitudes of dunes under such conditions. Field surveys have indicated the existence of low-angle dunes in suspended-  
load dominated rivers (Smith and McLean, 1977; Kostaschuk and Villard, 1996; Hendershot et al., 2016); moreover, flume  
experiments have indicated that dune height decreases with increasing suspended load flux (Naqshband et al., 2017; Bradley  
and Venditti, 2019). Theoretical analyses in Fredsøe (1981) have also predicted a decrease of dune steepness under unsteady  
flows with suspension where the flow discharges were being increased. In future works, nonlinear analyses should be done to  
305 obtain the amplitudes of dunes under flows with suspended load.

Ultimately, our linear analyses provide a possible explanation for the absence of dunes in turbidites: suspended load sup-  
presses dune formation and facilitates plane-bed formation. Previous research has suggested that the formation of dunes is  
suppressed due to the insufficient time for dune development (Walker, 1965), the hysteresis effect under waning flow condi-  
tions (Endo and Masuda, 1997), the turbulence suppression by high suspended-sediment concentrations (Lowe, 1988), the lack  
310 of a sharp near-bed density gradient (Arnott, 2012), and the effect of clay-sized sediment on bed rheology (Schindler et al.,  
2015). Although these interpretations could explain the absence of dune-scale cross-lamination in turbidites, we show that dune  
formation is suppressed without considering the above conditions. Therefore, the above conditions are not required to suppress  
dune formation (Figs. 2b, d, 4b, d and 5b). Instead, we propose that the development of dune-scale bed waves under turbidity  
currents is restricted by the presence of suspended load.

#### 315 4.2 Effect of suspension on coarse sediment bed

In the diagram with  $\tilde{D} = 1.20$  mm, the data with sheet flows plotted much above the upper limit of Fr for the stable region  
(Fig. 3). Sheet flows consist of a shear layer of bed-load that moves under high shear stress (Shields number is larger than 0.5)  
(Gao, 2008). A few past experimental studies have observed that plane bed develops beneath sheet flows on coarse sediment  
beds in open-channel flows (Williams, 1970; Hernandez-Moreira et al., 2020). The difference in hydraulic properties between  
320 standard bed-load and sheet flows could result in the disagreement between the stability diagrams and observational data. For  
example, the vertical velocity profile of an open-channel flow takes a logarithmic form (Keulegan, 1938), whereas that of sheet  
flows takes a power form (Sumer et al., 1996) or can be obtained by solving the differential equations (Egashira, 1997). In



addition, pressures of static interparticle contacts and inelastic particle collisions are not negligible in sheet flows (Egashira, 1997). Considering these differences in hydraulic conditions, the stability fields of perturbations are affected by sheet flows.  
325 Further, linear analyses considering sheet flows can be extended to analyses of debris flows and turbidity currents that have collisional layers (Sohn, 1997; Lanzoni et al., 2017). These topics can be further explored in future works.

## 5 Conclusions

We investigated the influence of suspended load on the formation of plane beds under open-channel flows. The stability diagrams show that the stable region for finer sediments is wider in the diagram with suspension than that without suspension.  
330 Further, the published data of plane beds with suspension coincide well with the stability diagrams where the suspension was considered. Our theoretical analysis found that suspended load promotes the formation of plane beds and suppresses the formation of dunes on the fine-grained bed. These results suggest that dune-scale cross lamination is absent in turbidites because the development of dunes in turbidity currents is restricted by the presence of suspended load. In addition, our analysis displays that the data pertaining to sheet flows deviate from the stable region. Additional theoretical work is required in order to examine  
335 whether the plane bed under sheet flow can be interpreted as a stable condition or not.

*Code and data availability.* The datasets and codes used for this study can be found at [url to be updated at acceptance]. Unpublished data used for the analysis were cited from the dataset of Brownlie (2018).

## Appendix A: Linear analysis

In Sect. 2.2.1–2.2.6, we formulated the hydrodynamics, the sediment transport model, and the basic state. Here, we solve the  
340 equations obtained in the above sections.

We impose an infinitesimal perturbation on the basic state. All the variables are modified using a small amplitude  $A$  and a complex angular frequency of the perturbation  $\omega$  as follows:

$$(\psi, p, h, Z, R, B, c) = (\psi_0, p_0, 1, 0, R_0, B_0, c_0) + A(\psi_1, p_1, H_1, Z_1, R_1, B_1, c_1) \exp[i(k\xi - \omega t)] \quad (\text{A1})$$

The subscript 1 denotes a variable at  $\mathcal{O}(A)$ . By substituting Eq. (A1) into the governing equations and boundary conditions,  
345 we can obtain the following equations at  $\mathcal{O}(A)$ :

$$\mathcal{L}^\psi(\eta) \psi_1(\eta) + \mathcal{L}^h(\eta) H_1 + \mathcal{L}^R(\eta) R_1 = 0 \quad (\text{A2})$$

$$ikp_1(\eta) + \mathcal{P}^\psi(\eta) \psi_1(\eta) + \mathcal{P}^h(\eta) H_1 + \mathcal{P}^R(\eta) R_1 = 0 \quad (\text{A3})$$



Here,  $\mathcal{L}^\phi$  and  $\mathcal{P}^\phi$  ( $\phi = \psi, h, R$ ) are linear operators. The specific forms of  $\mathcal{L}^\phi$  and  $\mathcal{P}^\phi$  are skipped herein. With the use of the boundary conditions (Eqs. (35) and (36)), we get:

$$350 \quad \psi_1(1) = 0 \quad (\text{A4})$$

$$p_1(1) = 0 \quad (\text{A5})$$

$$\psi_1(0) = 0 \quad (\text{A6})$$

$$\left. \frac{\partial \psi_1}{\partial \eta} \right|_{\eta=0} = 0 \quad (\text{A7})$$

Additionally, Eqs. (A3) and (A5) give:

$$355 \quad \mathcal{P}^\psi(1) \psi_1(1) + \mathcal{P}^h(1) H_1 + \mathcal{P}^R(1) R_1 = 0 \quad (\text{A8})$$

We employ a spectral collocation method using Chebyshev polynomials to solve the above differential equations. We expand  $\psi_1$  using the Chebyshev polynomials as follows:

$$\psi_1 = \sum_{n=0}^N a_n T_n(\zeta) \quad (\text{A9})$$

where  $a_n$  is the coefficient for the  $n$ -th order Chebyshev polynomial  $T_n$  and  $\zeta$  is the independent variable of the Chebyshev polynomials defined in the domain  $[-1, 1]$ . In this study, we transform  $\zeta$  using the following equation to improve the calculation accuracy:

$$\zeta = 2 \left\{ \frac{\ln[(\eta + R_0)/R_0]}{\ln[(1 + R_0)/R_0]} \right\} - 1 \quad (\text{A10})$$

The above functions are substituted into Eq. (A2); then, we evaluate the equation at the Gauss-Labatte points, which are defined as:

$$365 \quad \zeta_j = \cos\left(\frac{j\pi}{N+2}\right), \quad j = 1, 2, \dots, N+1 \quad (\text{A11})$$

By combining the governing equations, boundary conditions, and closure assumptions, we obtain the following system of linear algebraic equations:

$$\mathbf{L}\mathbf{a} = \mathbf{M}R_1 \quad (\text{A12})$$



with

$$370 \quad \mathbf{L} = \begin{pmatrix} T_0(-1) & \cdots & T_N(-1) & 0 \\ \check{T}_0(-1) & \cdots & \check{T}_N(-1) & 0 \\ T_0(1) & \cdots & T_N(1) & 0 \\ \check{\mathcal{P}}^\psi T_0(1) & \cdots & \check{\mathcal{P}}^\psi T_N(1) & \check{\mathcal{P}}^h \\ \check{\mathcal{L}}^\psi T_0(\zeta_2) & \cdots & \check{\mathcal{L}}^\psi T_N(\zeta_2) & \check{\mathcal{L}}^h \\ \vdots & \ddots & \vdots & \vdots \\ \check{\mathcal{L}}^\psi T_0(\zeta_{N-2}) & \cdots & \check{\mathcal{L}}^\psi T_N(\zeta_{N-2}) & \check{\mathcal{L}}^h \end{pmatrix} \quad (\text{A13})$$

$$\mathbf{a} = (a_0, a_1, \dots, a_N, D_1) \quad (\text{A14})$$

$$\mathbf{M} = (0, 0, 0, \check{\mathcal{P}}^R, \check{\mathcal{L}}^h, \dots, \check{\mathcal{L}}^h) \quad (\text{A15})$$

where a check mark ( $\check{\phantom{x}}$ ) denotes a linear operator associated with variable transformation from  $\eta$  to  $\zeta$ . We obtain the following solution from Eq. (A12):

$$375 \quad \mathbf{a} = \mathbf{L}^{-1} \mathbf{M} R_1 \quad (\text{A16})$$

Additionally, Eqs. (A9) and (A16) give:

$$\psi_1 = \psi_1^*(\eta) R_1 \quad (\text{A17})$$

$$H_1 = H_1^* R_1 \quad (\text{A18})$$

380 Similarly, we solve the eigenvalue problems for the sediment transport equations. By substituting Eq. (A1) into Eq. (24), we obtain the following equations at the order of  $\mathcal{O}(A)$ :

$$\mathcal{C}^c c_1(\eta) + \mathcal{C}^\psi(\eta) \psi_1(\eta) + \mathcal{C}^H H_1 + \mathcal{C}^R R_1 = 0 \quad (\text{A19})$$

Based on Eqs. (A17) and (A18), we obtain:

$$\mathcal{C}^c c_1(\eta) + (\mathcal{C}^\psi(\eta) \psi_1^*(\eta) + \mathcal{C}^H H_1^* + \mathcal{C}^R) R_1 = 0 \quad (\text{A20})$$

The boundary conditions give:

$$385 \quad \mathcal{S}^c c_1(1) + (\mathcal{S}^\psi(1) \psi_1^*(1) + \mathcal{S}^H H_1^* + \mathcal{S}^R) R_1 = 0 \quad (\text{A21})$$

$$\mathcal{B}^c c_1(0) + (\mathcal{B}^\psi(0) \psi_1^*(0) + \mathcal{B}^H H_1^* + \mathcal{B}^R) R_1 = 0 \quad (\text{A22})$$

Here,  $\mathcal{C}^\phi$ ,  $\mathcal{S}^\phi$  and  $\mathcal{B}^\phi$  ( $\phi = \psi, h, R, c$ ) are the linear operators.

We expand  $c_1$  using Chebyshev polynomials as follows:

$$c_1 = \sum_{n=0}^N b_n T_n(\zeta) \quad (\text{A23})$$



390 The system is evaluated at the Gauss-Labatte points, then we obtain:

$$\mathbf{K}\mathbf{b} = \mathbf{N}R_1 \quad (\text{A24})$$

with

$$\mathbf{K} = \begin{pmatrix} \check{\mathbf{B}}^c T_0(-1) & \cdots & \check{\mathbf{B}}^c T_N(-1) \\ \check{\mathbf{S}}^c T_0(1) & \cdots & \check{\mathbf{S}}^c T_N(-1) \\ \check{\mathbf{C}}^c T_0(\zeta_1) & \cdots & \check{\mathbf{C}}^c T_N(\zeta_1) \\ \vdots & \ddots & \vdots \\ \check{\mathbf{C}}^c T_0(\zeta_{N-1}) & \cdots & \check{\mathbf{C}}^c T_N(\zeta_{N-1}) \end{pmatrix} \quad (\text{A25})$$

$$\mathbf{b} = (b_0, b_1, \dots, b_N) \quad (\text{A26})$$

$$395 \quad \mathbf{N} = - \begin{pmatrix} \check{\mathbf{B}}^\psi \psi_1^*(-1) + \check{\mathbf{B}}^h H_1^* + \check{\mathbf{B}}^R \\ \check{\mathbf{S}}^\psi \psi_1^*(1) + \check{\mathbf{S}}^h H_1^* + \check{\mathbf{S}}^R \\ \check{\mathbf{C}}^\psi \psi_1^*(\zeta_1) + \check{\mathbf{C}}^h H_1^* + \check{\mathbf{C}}^R \\ \vdots \\ \check{\mathbf{C}}^\psi \psi_1^*(\zeta_{N-1}) + \check{\mathbf{C}}^h H_1^* + \check{\mathbf{C}}^R \end{pmatrix} \quad (\text{A27})$$

The coefficient  $b_n$  is derived as:

$$\mathbf{b} = \mathbf{K}^{-1} \mathbf{N}R_1 \quad (\text{A28})$$

Therefore, the following equation is obtained:

$$c_1(\eta) = c_1^*(\eta)R_1 \quad (\text{A29})$$

400 By substituting Eqs. (A17), (A18), and (A29) into Exner's equation (Eq. (61)), the complex angular frequency  $\omega$  is obtained in the following form:

$$\omega = \omega(k, \text{Fr}, C_z, \text{Re}_p) = \omega_r + i\omega_i \quad (\text{A30})$$

where  $\omega_i$  corresponds to the growth rate of the perturbation.

Here, using  $\text{Re}_p = \text{Re}_p(D) = \text{Re}_p(\tilde{D}, \tilde{h}_0)$  (Eq. (27)) and  $C_z = C_z(R_0) = C_z(\tilde{D}, \tilde{h}_0)$  (Eq. (52)), we can rewrite Eq. (A30)  
 405 as:

$$\omega = \omega(k, \text{Fr}, \tilde{D}, \tilde{h}_0) \quad (\text{A31})$$

Thus, we can obtain the growth rate  $\omega_i$  as a function of  $k$  for a given combination of  $(\text{Fr}, \tilde{D}, \tilde{h}_0)$ .





*Author contributions.* KO and NI performed the linear stability analysis. HN and NI contributed to the interpretation of the results. KO wrote the manuscript and prepared the figures, and then HN and NI provided feedback on the manuscript and figures.

410 *Competing interests.* The authors declare no competing interests.

*Acknowledgements.* This work was supported by the Japan Society for the Promotion of Science (JSPS) Grant-in-Aid (KAKENHI) Grant Number 18J22211. We would like to express our gratitude to Robert Dorrell for his comments. We are thankful to anonymous referees for their insightful comments on earlier versions of the manuscript.



## References

- 415 Abdel-Fattah, S., Amin, A., and Van Rijn, L. C.: Sand Transport in Nile River, Egypt, *Journal of Hydraulic Engineering*, 130, 488–500, [https://doi.org/10.1061/\(ASCE\)0733-9429\(2004\)130:6\(488\)](https://doi.org/10.1061/(ASCE)0733-9429(2004)130:6(488)), 2004.
- Arnott, R. W. C.: Turbidites, and the Case of the Missing Dunes, *Journal of Sedimentary Research*, 82, 379–384, <https://doi.org/10.2110/jsr.2012.29>, 2012.
- Baird, D. C.: Field adjustments of bed form phase diagrams, in: 2nd Joint Federal Interagency Conference, pp. 1137–1145, Las Vegas, NV, 420 2010.
- Blom, A., Ribberink, J. S., and de Vriend, H. J.: Vertical sorting in bed forms: Flume experiments with a natural and a trimodal sediment mixture, *Water Resources Research*, 39, <https://doi.org/10.1029/2001WR001088>, 1025, 2003.
- Bohorquez, P., Cañada-Pereira, P., Jimenez-Ruiz, P. J., and del Moral-Erencia, J. D.: The fascination of a shallow-water theory for the formation of megaflood-scale dunes and antidunes, *Earth-Science Reviews*, 193, 91–108, <https://doi.org/10.1016/j.earscirev.2019.03.021>, 425 2019.
- Bose, S. K. and Dey, S.: Reynolds averaged theory of turbulent shear flows over undulating beds and formation of sand waves, *Physical Review E*, 80, 036 304, <https://doi.org/10.1103/PhysRevE.80.036304>, 2009.
- Bouma, A. H.: *Sedimentology of some flysch deposits: A graphic approach to facies interpretation*, Elsevier Scientific Publishing Company, Amsterdam, 1962.
- 430 Bourke, M. C., Lancaster, N., Fenton, L. K., Parteli, E. J. R., Zimelman, J. R., and Radebaugh, J.: Extraterrestrial dunes: An introduction to the special issue on planetary dune systems, *Geomorphology*, 121, 1–14, <https://doi.org/10.1016/j.geomorph.2010.04.007>, 2010.
- Bradley, R., Venditti, J. G., Kostaschuk, R. A., Church, M., Hendershot, M., and Allison, M. A.: Flow and sediment suspension events over low-angle dunes: Fraser Estuary, Canada, *Journal of Geophysical Research: Earth Surface*, 118, 1693–1709, <https://doi.org/10.1002/jgrf.20118>, 2013.
- 435 Bradley, R. W. and Venditti, J. G.: Transport scaling of dune dimensions in shallow flows, *Journal of Geophysical Research: Earth Surface*, 124, 526–547, <https://doi.org/10.1029/2018JF004832>, 2019.
- Bridge, J. S. and Best, J. L.: Flow, sediment transport and bedform dynamics over the transition from dunes to upper-stage plane beds: implications for the formation of planar laminae, *Sedimentology*, 35, 753–763, <https://doi.org/10.1111/j.1365-3091.1988.tb01249.x>, 1988.
- Brownlie, W. R.: Prediction of flow depth and sediment discharge in open channels, Tech. Rep. KH-R43A, W. M. Keck Laboratory of 440 Hydraulics and Water Resources, California Institute of Technology, Pasadena, California, <https://doi.org/10.7907/Z9KP803R>, 1981.
- Brownlie, W. R.: Digitized dataset from "Compilation of alluvial channel data: laboratory and field" (Version 1.0), <https://doi.org/10.22002/d1.943>, caltechDATA, 2018.
- Cisneros, J., Best, J., van Dijk, T., de Almeida, R. P., Amsler, M., Boldt, J., Freitas, B., Galeazzi, C., Huizinga, R., Ianniruberto, M., Ma, H., Nittrouer, J. A., Oberg, K., Orfeo, O., Parsons, D., Szupiany, R., Wang, P., and Zhang, Y.: Dunes in the world's big rivers are characterized 445 by low-angle lee-side slopes and a complex shape, *Nature Geoscience*, 13, 156–162, <https://doi.org/10.1038/s41561-019-0511-7>, 2020.
- Colombini, M.: Revisiting the linear theory of sand dune formation, *Journal of Fluid Mechanics*, 502, 1–16, <https://doi.org/10.1017/S0022112003007201>, 2004.
- Colombini, M. and Stocchino, A.: Finite-amplitude river dunes, *Journal of Fluid Mechanics*, 611, 283–306, <https://doi.org/10.1017/S0022112008002814>, 2008.



- 450 Culbertson, J. K., Scott, C. H., and Bennett, J. P.: Summary of alluvial-channel data from Rio Grande conveyance channel, New Mexico, 1965-69, Tech. Rep. 562-J, Professional Paper, Washington, DC, 1972.
- de Almeida, R. P., Galeazzi, C. P., Freitas, B. T., Janikian, L., Ianniruberto, M., and Marconato, A.: Large barchanoid dunes in the Amazon River and the rock record: Implications for interpreting large river systems, *Earth and Planetary Science Letters*, 454, 92–102, <https://doi.org/10.1016/j.epsl.2016.08.029>, 2016.
- 455 de Leeuw, J., Lamb, M. P., Parker, G., Moodie, A. J., Hought, D., Venditti, J. G., and Nittrouer, J. A.: Entrainment and suspension of sand and gravel, *Earth Surface Dynamics*, 8, 485–504, <https://doi.org/10.5194/esurf-8-485-2020>, 2020.
- Di Cristo, C., Iervolino, M., and Vacca, A.: Linear stability analysis of a 1-D model with dynamical description of bed-load transport, *Journal of Hydraulic Research*, 44, 480–487, <https://doi.org/10.1080/00221686.2006.9521699>, 2006.
- Dietrich, W. E. and Whiting, P.: Boundary shear stress and sediment transport in river meanders of sand and gravel, chap. 1, pp. 1–50, 460 American Geophysical Union (AGU), <https://doi.org/10.1029/WM012p0001>, 1989.
- Egashira, S.: Mechanics of sediment transport and sediment laden flows: 1. Mechanics of debris flows, *Japanese journal of multiphase flow*, 11, 151–156, <https://doi.org/10.3811/jjmf.11.151>, 1997.
- Endo, N. and Masuda, F.: Small ripples in dunes regime and interpretation about dunes-missing in turbidite, *The Journal of the Geological Society of Japan*, 103, 741–746, <https://doi.org/10.5575/geosoc.103.741>, 1997.
- 465 Engelund, F.: Instability of erodible beds, *Journal of Fluid Mechanics*, 42, 225–244, <https://doi.org/10.1017/S0022112070001210>, 1970.
- Ferguson, R. and Church, M.: A simple universal equation for grain settling velocity, *Journal of Sedimentary Research*, 74, 933–937, <https://doi.org/10.1306/051204740933>, 2004.
- Foley, M. G.: Scour and fill in ephemeral streams, Tech. Rep. KH-R:KH-R-33, W. M. Keck Laboratory of Hydraulics and Water Resources, California Institute of Technology, Pasadena, California, 1975.
- 470 Fourrière, A., Claudin, P., and Andreotti, B.: Bedforms in a turbulent stream: formation of ripples by primary linear instability and of dunes by nonlinear pattern coarsening, *Journal of Fluid Mechanics*, 649, 287–328, <https://doi.org/10.1017/S0022112009993466>, 2010.
- Fredsøe, J.: On the development of dunes in erodible channels, *Journal of Fluid Mechanics*, 64, 1–16, <https://doi.org/10.1017/S0022112074001960>, 1974.
- Fredsøe, J.: Unsteady flow in straight alluvial streams. Part 2. Transition from dunes to plane bed, *Journal of Fluid Mechanics*, 102, 431–453, 475 <https://doi.org/10.1017/S0022112081002723>, 1981.
- Fukuoka, S., Okutsu, K., and Yamasaka, M.: Dynamic and kinematic features of sand waves in upper regime [in Japanese], in: *Proceedings of the Japan Society of Civil Engineers*, vol. 323, pp. 77–89, Japan Society of Civil Engineers, [https://doi.org/10.2208/jscej1969.1982.323\\_77](https://doi.org/10.2208/jscej1969.1982.323_77), 1982.
- Gabel, S. L.: Geometry and kinematics of dunes during steady and unsteady flows in the Calamus River, Nebraska, USA, *Sedimentology*, 480 40, 237–269, <https://doi.org/10.1111/j.1365-3091.1993.tb01763.x>, 1993.
- Gao, P.: Transition between two bed-load transport regimes: saltation and sheet flow, *Journal of Hydraulic Engineering*, 134, 340–349, [https://doi.org/10.1061/\(ASCE\)0733-9429\(2008\)134:3\(340\)](https://doi.org/10.1061/(ASCE)0733-9429(2008)134:3(340)), 2008.
- Gao, X., Nartreau, C., and Rozier, O.: Development and steady states of transverse dunes: A numerical analysis of dune pattern coarsening and giant dunes, *Journal of Geophysical Research: Earth Surface*, 120, 2200–2219, <https://doi.org/10.1002/2015JF003549>, 2015.
- 485 Gee, D. M.: Bed form response to nonsteady flows, *Journal of the Hydraulics Division*, 101, 437–449, 1975.
- Guala, M., Singh, A., BadHeartBull, N., and Fofoula-Georgiou, E.: Spectral description of migrating bed forms and sediment transport, *Journal of Geophysical Research: Earth Surface*, 119, 123–137, <https://doi.org/10.1002/2013JF002759>, 2014.




- Guy, H. P., Simons, D. B., and Richardson, E. V.: Summary of alluvial channel data from flume experiments, 1956–61, Tech. Rep. 462-I, Professional Paper, Washington, DC, 1966.
- 490 Hage, S., Cartigny, M. J. B., Clare, M. A., Sumner, E. J., Vendettuoli, D., Hughes Clarke, J. E., Hubbard, S. M., Talling, P. J., Lintern, D. G., Stacey, C. D., Englert, R. G., Vardy, M. E., Hunt, J. E., Yokokawa, M., Parsons, D. R., Hizzett, J. L., Azpiroz-Zabala, M., and Vellinga, A. J.: How to recognize crescentic bedforms formed by supercritical turbidity currents in the geologic record: Insights from active submarine channels, *Geology*, 46, 563–566, <https://doi.org/10.1130/G40095.1>, 2018.
- Harms, J. C.: Primary Sedimentary Structures, *Annual Review of Earth and Planetary Sciences*, 7, 227–248,  
495 <https://doi.org/10.1146/annurev.ea.07.050179.001303>, 1979.
- Hendershot, M. L., Venditti, J. G., Bradley, R. W., Kostaschuk, R. A., Church, M., and Allison, M. A.: Response of low-angle dunes to variable flow, *Sedimentology*, 63, 743–760, <https://doi.org/10.1111/sed.12236>, 2016.
- Hernandez-Moreira, R., Jafarinik, S., Sanders, S., Kendall, C. G. S. C., Parker, G., and Viparelli, E.: Emplacement of massive deposits by sheet flow, *Sedimentology*, 67, 1951–1972, <https://doi.org/10.1111/sed.12689>, 2020.
- 500 Iseya, F.: An experimental study of dune development and its effect on sediment suspension, *Environmental Research Center papers*, 5, 1–56, 1984.
- Julien, P. Y.: Study of bedform geometry in large rivers, Tech. Rep. Q1386, Delft Hydraulics, Emmeloord, Netherlands, 1992.
- Kennedy, J. F.: Stationary waves and antidunes in alluvial channels, Tech. Rep. KH-R-2, W. M. Keck Laboratory of Hydraulics and Water Resources, California Institute of Technology, Pasadena, CA, <https://doi.org/10.7907/Z9QR4V22>, 1961.
- 505 Kennedy, J. F.: The mechanics of dunes and antidunes in erodible-bed channels, *Journal of Fluid Mechanics*, 16, 521–544, <https://doi.org/10.1017/S0022112063000975>, 1963.
- Keulegan, G. H.: Laws of turbulent flow in open channels, *Journal National Bureau of Standards*, Research Paper 1151, 21, 707–741, 1938.
- Kostaschuk, R. and Villard, P.: Flow and sediment transport over large subaqueous dunes: Fraser River, Canada, *Sedimentology*, 43, 849–863, <https://doi.org/10.1111/j.1365-3091.1996.tb01506.x>, 1996.
- 510 Kuhnle, R. A. and Wren, D. G.: Size of suspended sediment over dunes, *Journal of Geophysical Research: Earth Surface*, 114, <https://doi.org/10.1029/2008JF001200>, f02020, 2009.
- Lanzoni, S., Gregoretto, C., and Stancanelli, L. M.: Coarse-grained debris flow dynamics on erodible beds, *Journal of Geophysical Research: Earth Surface*, 122, 592–614, <https://doi.org/10.1002/2016JF004046>, 2017.
- Leclair, S. F. and Bridge, J. S.: Quantitative interpretation of sedimentary structures formed by river dunes, *Journal of Sedimentary Research*,  
515 71, 713–716, <https://doi.org/10.1306/2DC40962-0E47-11D7-8643000102C1865D>, 2001.
- Lowe, D. R.: Suspended-load fallout rate as an independent variable in the analysis of current structures, *Sedimentology*, 35, 765–776, <https://doi.org/10.1111/j.1365-3091.1988.tb01250.x>, 1988.
- Ma, H., Nittrouer, J. A., Naito, K., Fu, X., Zhang, Y., Moodie, A. J., Wang, Y., Wu, B., and Parker, G.: The exceptional sediment load of fine-grained dispersal systems: Example of the Yellow River, China, *Science Advances*, 3, <https://doi.org/10.1126/sciadv.1603114>, 2017.
- 520 McLean, S. R.: The stability of ripples and dunes, *Earth-Science Reviews*, 29, 131–144, [https://doi.org/10.1016/0012-8252\(0\)90032-Q](https://doi.org/10.1016/0012-8252(0)90032-Q), 1990.
- Mezaki, S.: Bed forms in the Yoro river at Azu, Chiba prefecture [in Japanese], *Geographical Review of Japan*, 46, 516–532, <https://doi.org/10.4157/grj.46.516>, 1973.
- Miall, A.: Alluvial deposits, in: *Facies models 4*, edited by James, N. P. and Dalrymple, R. W., pp. 105–137, Geological Association of Canada, Canada, 2010.




- 525 Nakasato, Y. and Izumi, N.: Linear stability analysis of small-scale fluvial bed waves with active suspended sediment load [in Japanese], *Journal of applied mechanics*, 11, 727–734, <https://doi.org/10.2208/journalam.11.727>, 2008.
- Naqshband, S., Ribberink, J. S., Hurther, D., and Hulscher, S. J. M. H.: Bed load and suspended load contributions to migrating sand dunes in equilibrium, *Journal of Geophysical Research: Earth Surface*, 119, 1043–1063, <https://doi.org/10.1002/2013JF003043>, 2013JF003043, 2014.
- 530 Naqshband, S., Hoitink, A. J. F., McElroy, B., Hurther, D., and Hulscher, S. J. M. H.: A sharp view on river dune transition to upper stage plane bed, *Geophysical Research Letters*, 44, 11 437–11 444, <https://doi.org/10.1002/2017GL075906>, 2017.
- Neill, C. R.: Bed forms in the Lower Red Deer River, Alberta, *Journal of Hydrology*, 7, 58–85, [https://doi.org/10.1016/0022-1694\(68\)90195-9](https://doi.org/10.1016/0022-1694(68)90195-9), 1969.
- Sambrook Smith, G. H., Best, J. L., Leroy, J. Z., and Orfeo, O.: The alluvial architecture of a suspended sediment dominated meandering river: the Río Bermejo, Argentina, *Sedimentology*, 63, 1187–1208, <https://doi.org/10.1111/sed.12256>, 2016.
- 535 Schindler, R. J., Parsons, D. R., Ye, L., Hope, J. A., Baas, J. H., Peakall, J., Manning, A. J., Aspden, R. J., Malarkey, J., Simmons, S., Paterson, D. M., Lichtman, I. D., Davies, A. G., Thorne, P. D., and Bass, S. J.: Sticky stuff: Redefining bedform prediction in modern and ancient environments, *Geology*, 43, 399–402, <https://doi.org/10.1130/G36262.1>, 2015.
- Shen, H. W., Harrison, A. S., and Mellema, W. J.: Temperature and Missouri river stages near Omaha, *Journal of the Hydraulics Division*, 540 104, 1–20, 1978.
- Shinohara, K. and Tsubaki, T.: On the Characteristics of Sand Waves Formed Upon Beds of the Open Channels and Rivers, Report of Research Institute for Applied Mechanics, VII, Kyushu University, Kyusyu, Japan, 1959.
- Simons, D. B.: Theory and design of stable channels in alluvial material, Ph.D. thesis, Colorado State University, Fort Collins, Colorado, 1957.
- 545 Smith, J. D. and McLean, S. R.: Spatially averaged flow over a wavy surface, *Journal of Geophysical Research*, 82, 1735–1746, <https://doi.org/10.1029/JC082i012p01735>, 1977.
- Sohn, Y. K.: On traction-carpet sedimentation, *Journal of Sedimentary Research*, 67, 502–509, <https://doi.org/10.1306/D42685AE-2B26-11D7-8648000102C1865D>, 1997.
- Sukhodolov, A. N., Fedele, J. J., and Rhoads, B. L.: Structure of flow over alluvial bedforms: an experiment on linking field and laboratory methods, *Earth Surface Processes and Landforms*, 31, 1292–1310, <https://doi.org/10.1002/esp.1330>, 2006.
- 550 Sumer, B. M., Kozakiewicz, A., Fredsøe, J., and Deigaard, R.: Velocity and concentration profiles in sheet-flow layer of movable bed, *Journal of Hydraulic Engineering*, 122, 549–558, [https://doi.org/10.1061/\(ASCE\)0733-9429\(1996\)122:10\(549\)](https://doi.org/10.1061/(ASCE)0733-9429(1996)122:10(549)), 1996.
- Talling, P. J., Masson, D. G., Sumner, E. J., and Malgesini, G.: Subaqueous sediment density flows: Depositional processes and deposit types, *Sedimentology*, 59, 1937–2003, <https://doi.org/10.1111/j.1365-3091.2012.01353.x>, 2012.
- 555 Tanaka, Y.: An experimental study on anti-dunes, *Disaster Prevention Research Institute Annuals*, 13, 271–284, 1970.
- Taylor, B. D.: Temperature effects in alluvial streams, Tech. Rep. KH-R-27, W. M. Keck Laboratory of Hydraulics and Water Resources, California Institute of Technology, Pasadena, CA, <https://doi.org/10.7907/Z93776PN>, 1971.
- Tilston, M., Arnott, R., Rennie, C., and Long, B.: The influence of grain size on the velocity and sediment concentration profiles and depositional record of turbidity currents, *Geology*, 43, 839–842, <https://doi.org/10.1130/G37069.1>, 2015.
- 560 van den Berg, J. H. and van Gelder, A.: A new bedform stability diagram, with emphasis on the transition of ripples to plane bed in flows over fine sand and silt, in: *Alluvial sedimentation*, edited by Marzo, M. and Puigdefabregas, C., vol. 17, pp. 11–21, Blackwell Scientific Publications, Special Publications, International Association of Sedimentologists, 1993.



- van Duin, O. J. M., Hulscher, S. J. M. H., Ribberink, J. S., and Dohmen-Janssen, C. M.: Modeling of spatial lag in bed-load transport processes and its effect on dune morphology, *Journal of Hydraulic Engineering*, 143, 04016084, [https://doi.org/10.1061/\(ASCE\)HY.1943-7900.0001254](https://doi.org/10.1061/(ASCE)HY.1943-7900.0001254), 2017.
- 565
- Venditti, J. G., Church, M., and Bennett, S. J.: On the transition between 2D and 3D dunes, *Sedimentology*, 52, 1343–1359, <https://doi.org/10.1111/j.1365-3091.2005.00748.x>, 2005.
- Vesipa, R., Camporeale, C., and Ridolfi, L.: A shallow-water theory of river bedforms in supercritical conditions, *Physics of Fluids*, 24, 94104, <https://doi.org/10.1063/1.4753943>, 2012.
- 570
- Walker, R. G.: The origin and significance of the internal sedimentary structures of turbidites, *Proceedings of the Yorkshire Geological Society*, 35, 1–32, <https://doi.org/10.1144/pygs.35.1.1>, 1965.
- Wijbenga, J. H. A. and Klaassen, G. J.: Changes in Bedform Dimensions under Unsteady Flow Conditions in a Straight Flume, in: *Modern and Ancient Fluvial Systems*, edited by Collinson, J. D. and Lewin, J., pp. 35–48, Blackwell Publishing Ltd., <https://doi.org/10.1002/9781444303773.ch3>, 1983.
- 575
- Wilbers, A.: The development and hydraulic roughness of subaqueous dunes, Ph.D. thesis, Utrecht University, Utrecht, Netherlands, 2004.
- Williams, G. P.: Flume width and water depth effects in sediment transport experiments, United States Government Printing Office, Washington, DC, U. S. Geological Survey Professional Paper 562-H, 1970.
- Wong, M. and Parker, G.: Reanalysis and Correction of Bed-Load Relation of Meyer-Peter and Müller Using Their Own Database, *Journal of Hydraulic Engineering*, 132, 1159–1168, [https://doi.org/10.1061/\(ASCE\)0733-9429\(2006\)132:11\(1159\)](https://doi.org/10.1061/(ASCE)0733-9429(2006)132:11(1159)), 2006.
- 580
- Wren, D. G., Kuhnle, R. A., and Wilson, C. G.: Measurements of the relationship between turbulence and sediment in suspension over mobile sand dunes in a laboratory flume, *Journal of Geophysical Research: Earth Surface*, 112, <https://doi.org/10.1029/2006JF000683>, f03009, 2007.
- Yokokawa, M., Izumi, N., Naito, K., Parker, G., Yamada, T., and Greve, R.: Cyclic steps on ice, *Journal of Geophysical Research: Earth Surface*, 121, 1023–1048, <https://doi.org/10.1002/2015JF003736>, 2016.

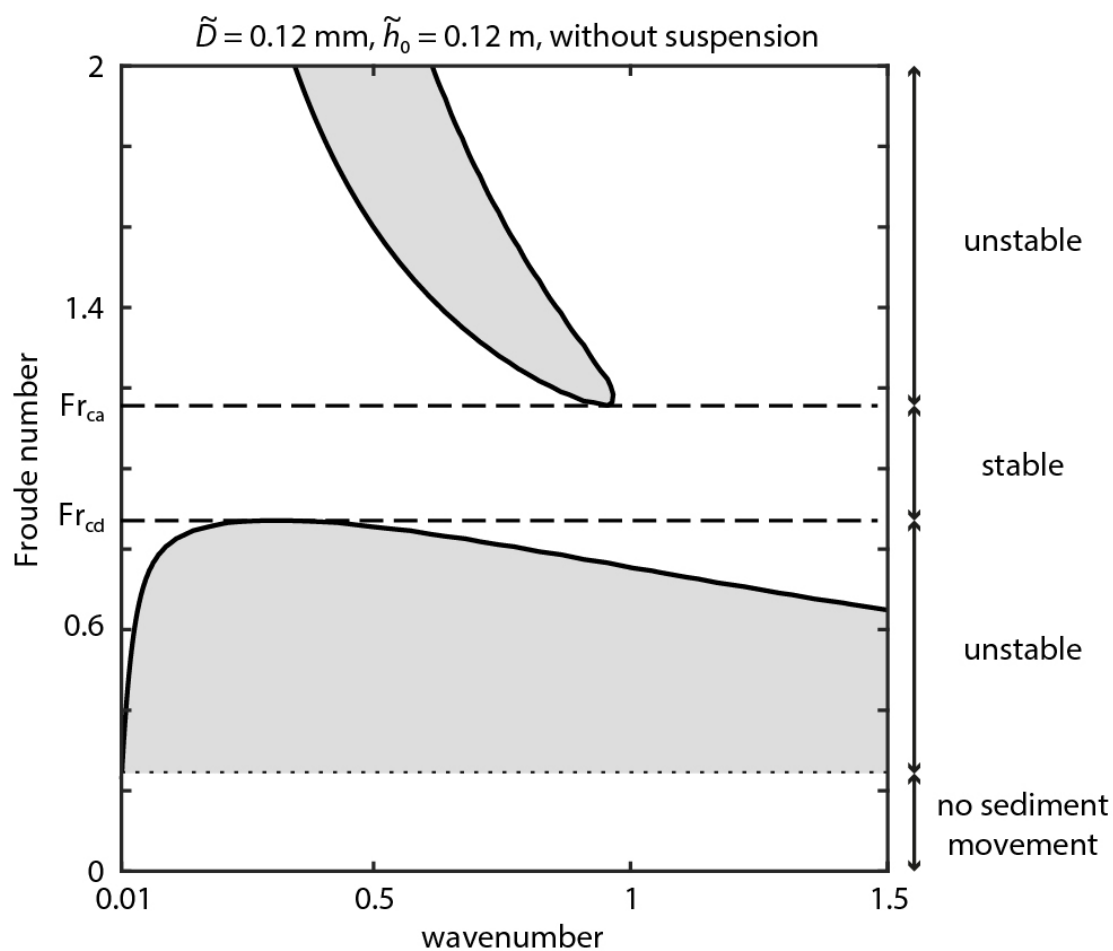


**Figure 1.** Contour map of perturbation growth rate  $\omega_i$  without suspension. Sediment diameter and flow depth were set to  $\tilde{D} = 0.12 \text{ mm}$  and  $\tilde{h}_0 = 0.1201 \text{ m}$ , respectively. The dotted line denotes the threshold of sediment motion. The dashed lines denote the critical Froude numbers  $Fr_{cd}$  and  $Fr_{ca}$  for instabilities. The region where the growth rate is positive is highlighted in grey.

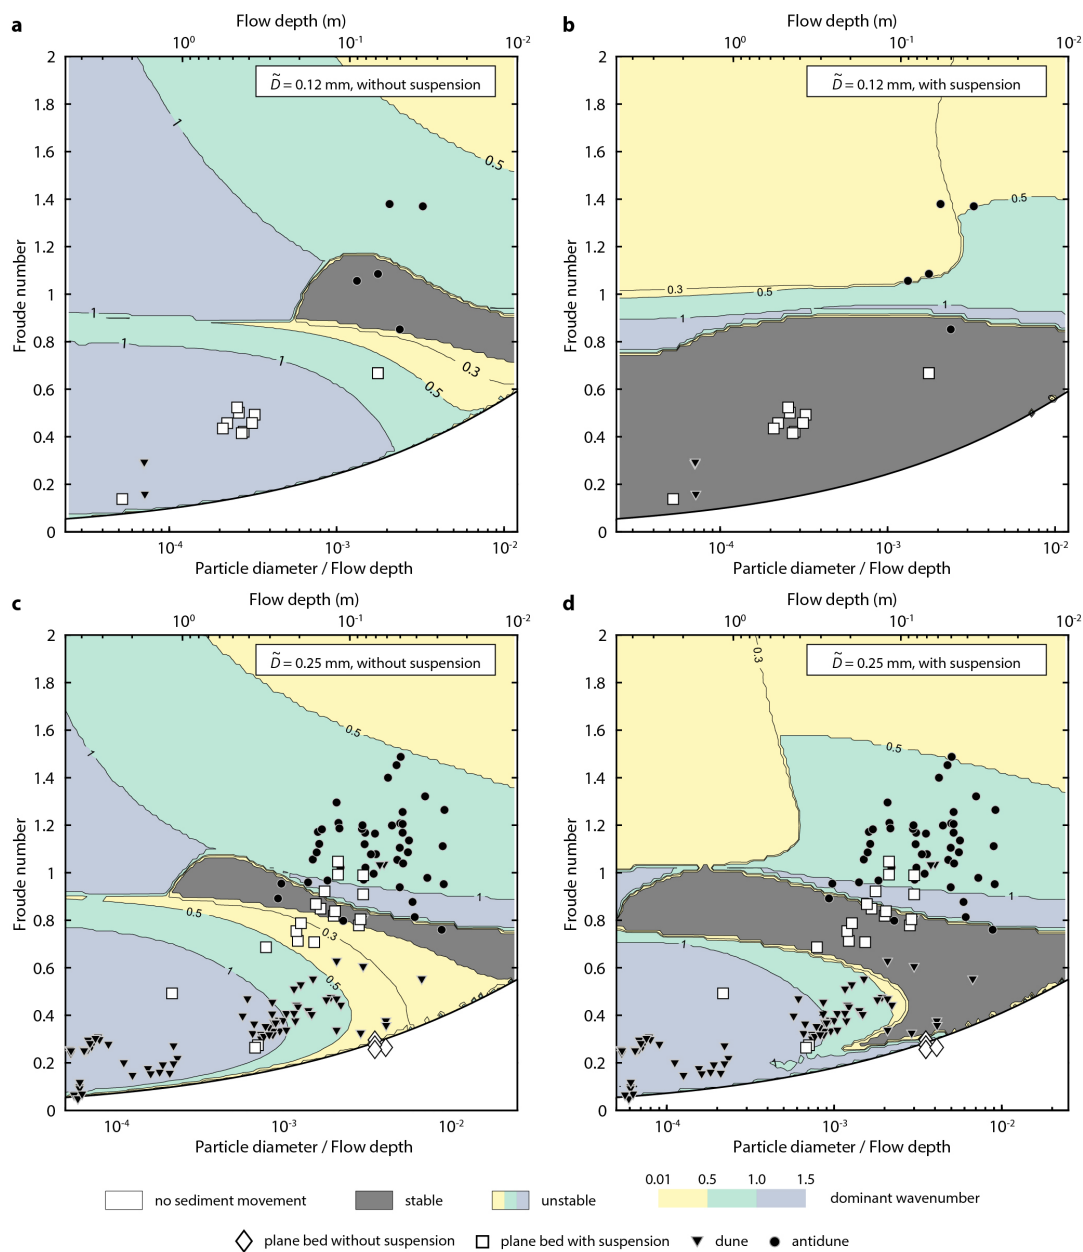


**Figure 2.** Contour maps of the dominant wavenumbers of perturbations with a fixed sediment diameter  $\tilde{D}$ . Symbols are observational data. a,  $\tilde{D} = 0.12$  mm without suspension. b,  $\tilde{D} = 0.12$  mm with suspension. c,  $\tilde{D} = 0.25$  mm without suspension. d,  $\tilde{D} = 0.25$  mm with suspension. a and b, The range of  $\tilde{D}$  of observational data is from 0.0883 mm to 0.163 mm. c and d, The range of  $\tilde{D}$  of observational data is from 0.184 mm to 0.34 mm.




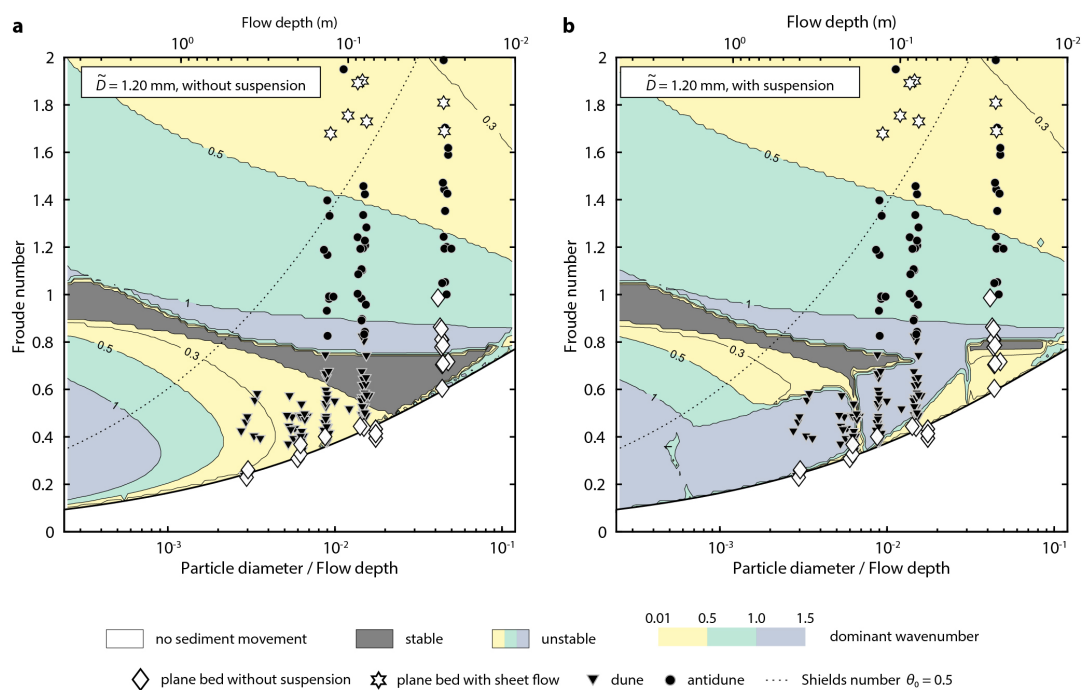


**Figure 3.** Contour maps of dominant wavenumbers of perturbations. Symbols are observational data. The sediment diameter  $\tilde{D}$  was set to 1.20 mm. a, Without suspension. b, With suspension. The range of  $\tilde{D}$  of observational data is from 0.883 mm to 1.63 mm.

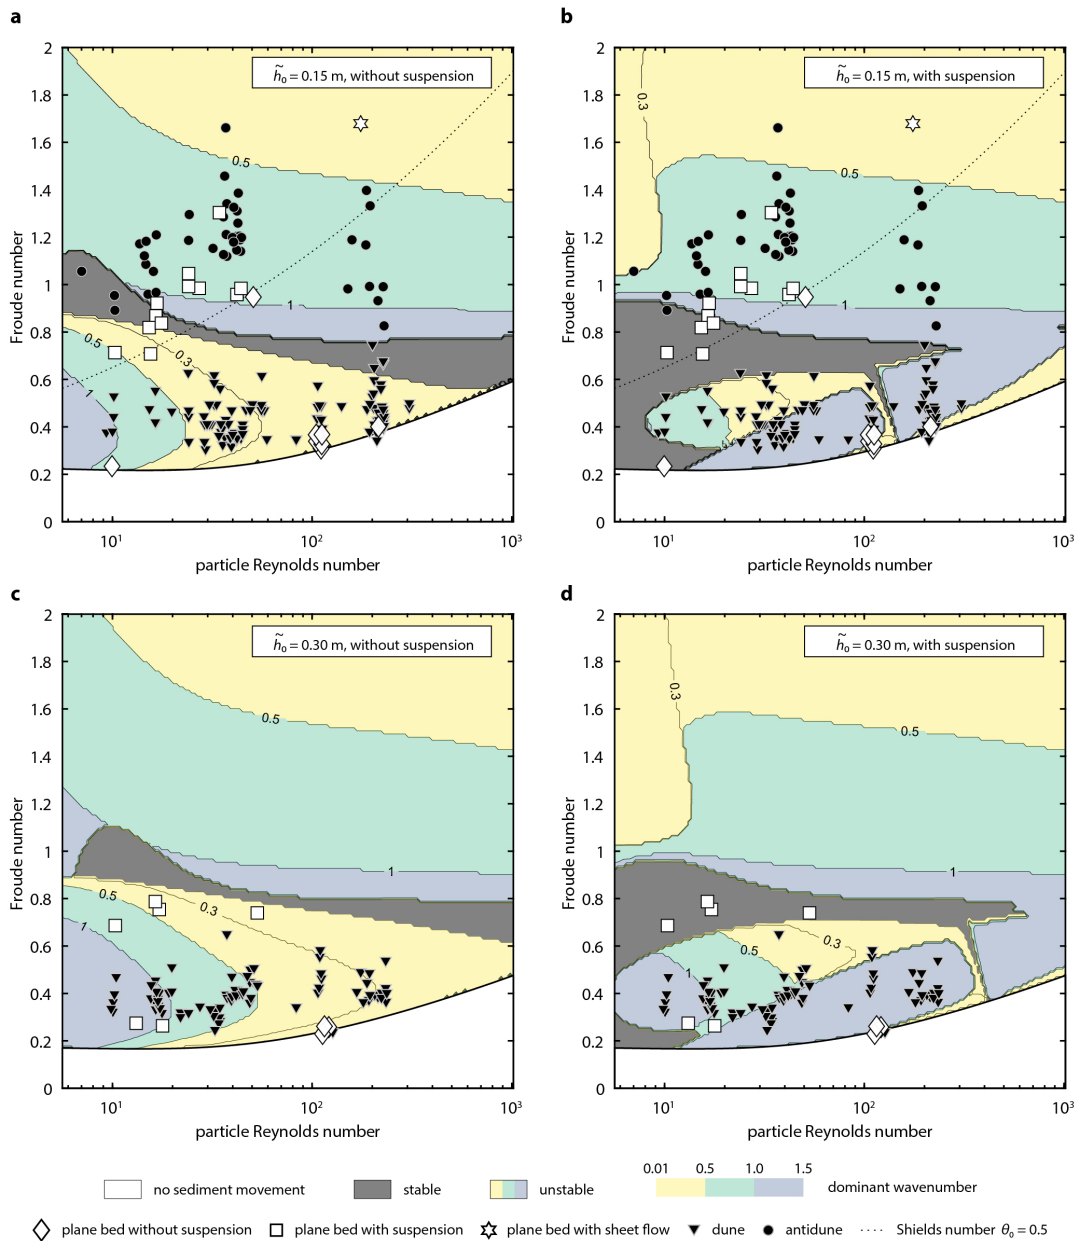


**Figure 4.** Contour maps of the dominant wavenumbers of perturbations with a fixed flow depth  $\tilde{H}$ . Symbols are observational data. a,  $\tilde{H} = 0.15$  m without suspension. b,  $\tilde{H} = 0.15$  m with suspension. c,  $\tilde{H} = 0.30$  m without suspension. d,  $\tilde{H} = 0.30$  m with suspension. a and b, The range of  $\tilde{H}$  of observational data is from 0.11 m to 0.21 m. c and d, The range of  $\tilde{H}$  of observational data is from 0.21 m to 0.42 m.

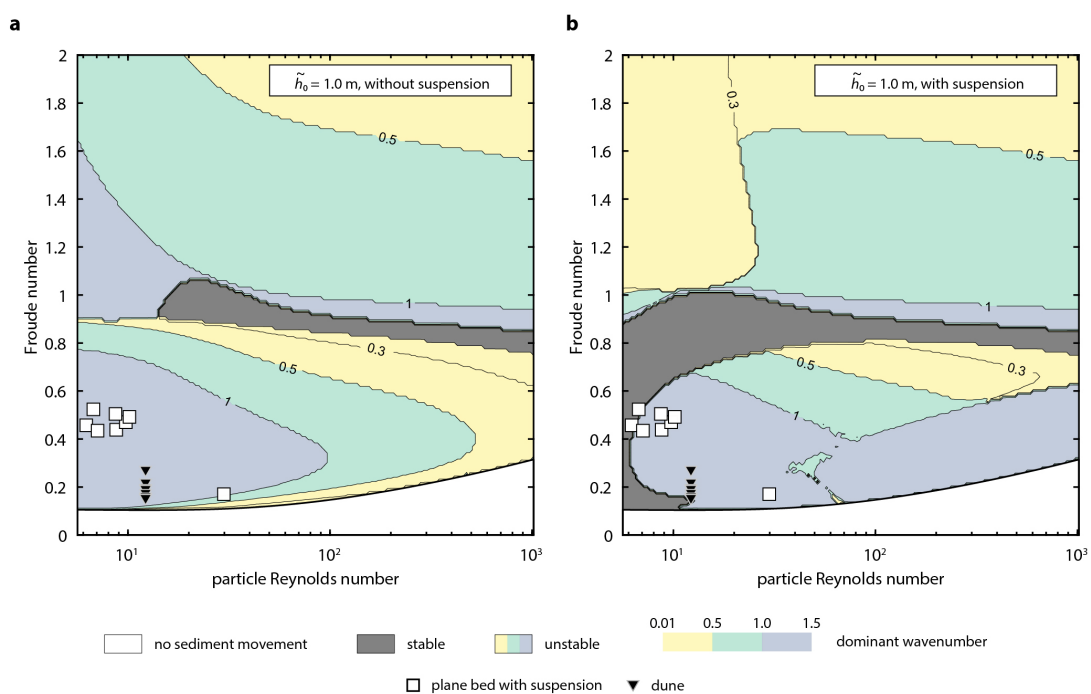

**Figure 5.** Contour maps of the dominant wavenumbers of perturbations with a fixed flow depth  $\tilde{H}$ . Symbols are observational data. a,  $\tilde{H} = 1.0$  m without suspension. b,  $\tilde{H} = 1.0$  m with suspension. The range of  $\tilde{H}$  of observational data is from 0.7 m to 1.41 m.

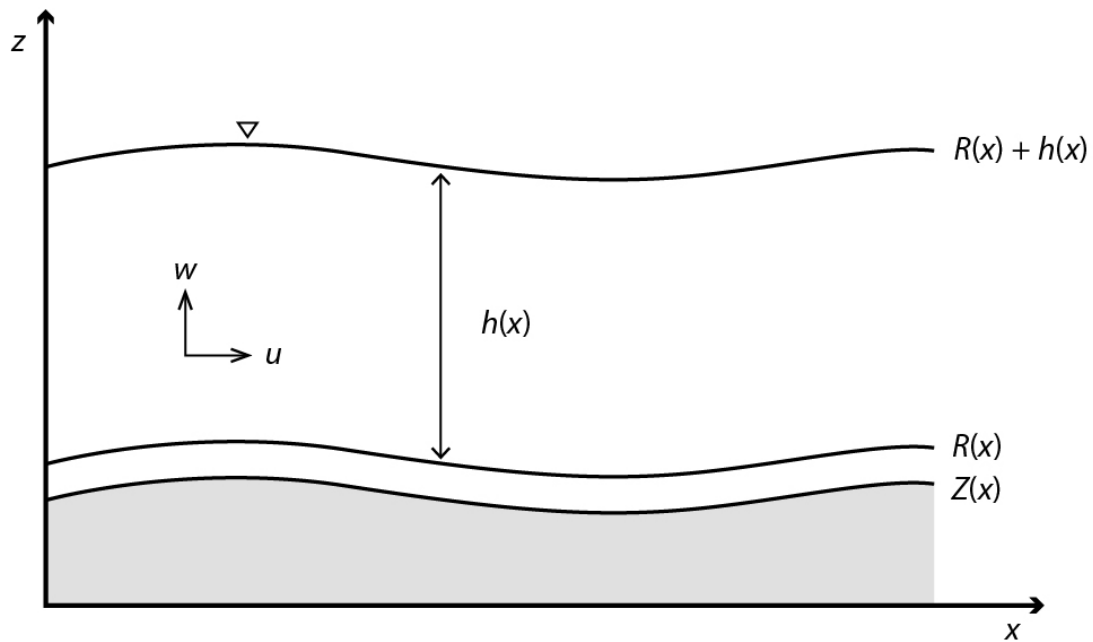

**Figure A1.** Conceptual diagram of the flow. The dimensionless parameters  $u$  and  $w$  are the flow velocities in  $x$ - and  $z$ - directions, respectively,  $h$  is the flow depth,  $Z$  denotes the bed height, and  $R$  is the height of the reference level at which the flow velocity is assumed to vanish in a logarithmic law.

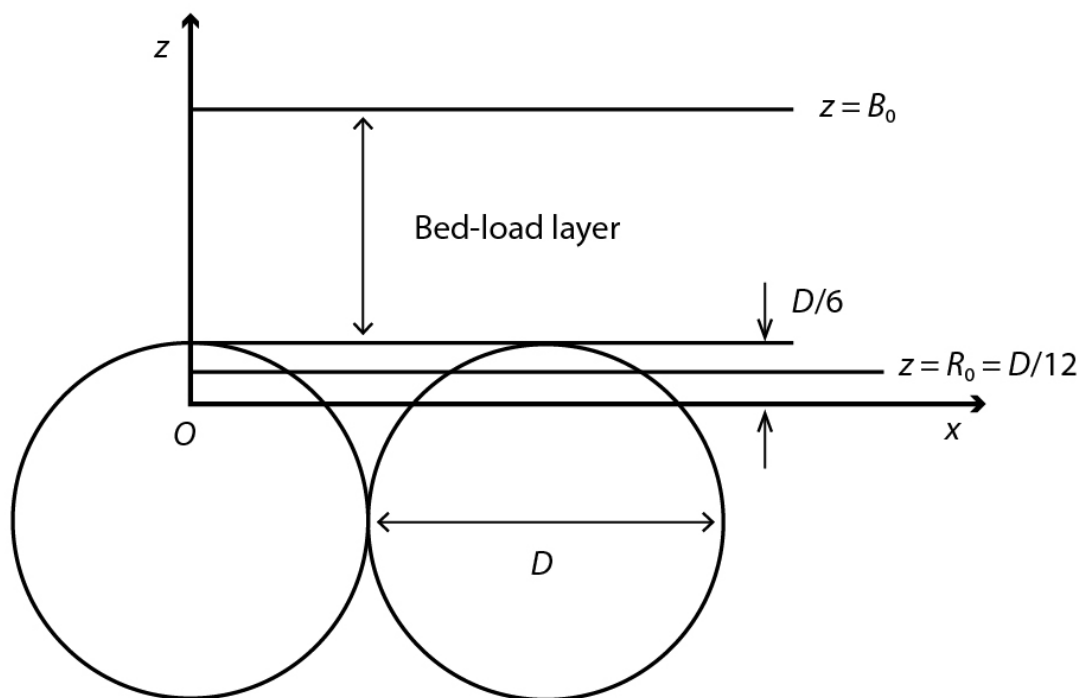

**Figure A2.** Conceptual diagram of the sediment bed. The origin of  $z$ -direction is denoted by  $O$ . The parameter  $D$  is the dimensionless diameter of a bed particle,  $B_0$  is the height of the top of the bed-load layer in the basic state, and  $R_0$  is the height of reference level in the basic state.



**Table A1.** Summary of data used for the stability diagram with  $\tilde{D} = 0.12$  mm.

Reference	# of points	flow depth $\tilde{h}$ [m]	flow velocity $\tilde{U}$ [m/s]	particle diameter $\tilde{D}$ [mm]	Froude number Fr	Source
<b>Plane bed with suspension</b>						
Taylor (1971)	2	0.0783	0.585	0.138	0.668	Flume
Simons (1957)	1	1.83	0.585	0.096	0.138	Field
Culbertson et al. (1972)	8	0.494–0.957	1.06–1.42	0.16–0.2	0.415–0.524	Field
<b>Dunes</b>						
Baird (2010)	1	2.24	0.744	0.16	0.159	Field
Shen et al. (1978)	2	2.94–3.07	1.55–1.61	0.208–0.218	0.288–0.294	Field
<b>Antidunes</b>						
Tanaka (1970)	5	0.0443–0.11	0.658–1.14	0.145	0.852–1.38	Flume



**Table A2.** Summary of data used for the stability diagram with  $\tilde{D} = 0.25$  mm.

Reference	# of points	flow depth $\tilde{h}$ [m]	flow velocity $\tilde{U}$ [m/s]	particle diameter $\tilde{D}$ [mm]	Froude number Fr	Source
<b>Plane bed without suspension</b>						
Taylor (1971)	7	0.0606–0.061	0.198–0.229	0.215–0.248	0.256–0.296	Flume
<b>Plane bed with suspension</b>						
Bridge and Best (1988)	2	0.1	0.9–0.98	0.3	0.909–0.990	Flume
Guy et al. (1966)	10	0.155–0.241	0.881–1.29	0.19–0.33	0.686–1.05	Flume
Taylor (1971)	4	0.0788–0.114	0.692–0.878	0.228	0.778–0.838	Flume
Culbertson et al. (1972)	3	0.284–0.969	0.457–1.52	0.2–0.24	0.264–0.492	Field
<b>Dunes</b>						
Bridge and Best (1988)	2	0.1	0.6–0.8	0.3	0.606–0.808	Flume
Gee (1975)	6	0.0454–0.105	0.305–0.920	0.305	0.325–1.04	Flume
Guy et al. (1966)	31	0.140–0.344	0.421–0.820	0.19–0.33	0.318–0.628	Flume
Naqshband et al. (2014)	2	0.25	0.64–0.8	0.29	0.409–0.511	Flume
Abdel-Fattah et al. (2004), Wilbers (2004)	6	4.03–5.72	0.31–0.75	0.239–0.322	0.0493–0.118	Field
Baird (2010)	2	1.67–2.33	0.597–1.33	0.21	0.148–0.278	Field
Gabel (1993)	4	0.4–0.43	0.61–0.65	0.31–0.33	0.301–0.320	Field
Julien (1992)	28	6.6–19.5	1.3–1.55	0.2–0.33	0.094–0.186	Field
Mezaki (1973)	8	0.9–1.35	0.49–0.83	0.21	0.154–0.272	Field
Neill (1969)	1	3.05	1.10	0.34	0.201	Field
Shen et al. (1978)	16	2.78–4.94	1.37–1.73	0.193–0.266	0.240–0.309	Field
<b>Antidunes</b>						
Foley (1975)	3	0.0305–0.0473	0.546–0.692	0.28	0.813–1.26	Flume
Fukuoka et al. (1982)	15	0.0209–0.0569	0.349–0.93	0.19	0.760–1.45	Flume
Guy et al. (1966)	13	0.0914–0.204	1.06–1.62	0.19–0.33	0.892–1.30	Flume
Kennedy (1961)	15	0.0448–0.106	0.637–1.05	0.233	0.798–1.49	Flume



**Table A3.** Summary of data used for the stability diagram with  $\bar{D} = 1.20$  mm.

Reference	# of points	flow depth $\bar{h}$ [m]	flow velocity $\bar{U}$ [m/s]	particle diameter $\bar{D}$ [mm]	Froude number Fr	Source
<b>Plane bed without suspension</b>						
Guy et al. (1966)	6	0.149–0.314	0.381–0.454	0.93	0.229–0.368	Flume
Taylor (1971)	6	0.061	0.305–0.335	1.07	0.394–0.433	Flume
Williams (1970)	14	0.0283–0.155	0.332–0.558	1.35	0.401–0.986	Flume
<b>Plane bed with sheet flow</b>						
Hernandez-Moreira et al. (2020)	2	0.091–0.1	1.58–1.66	0.85–1.09	1.59–1.75	Flume
Williams (1970)	6	0.0299–0.143	0.914–1.99	1.35	1.68–1.90	Flume
<b>Dunes</b>						
Blom et al. (2003)	1	0.245	0.69	1.3	0.445	Flume
Gee (1975)	4	0.0622–0.146	0.449–0.584	1	0.488–0.575	Flume
Guy et al. (1966)	14	0.140–0.338	0.488–0.951	0.93	0.370–0.583	Flume
Williams (1970)	71	0.0872–0.223	0.448–0.917	1.35	0.343–0.825	Flume
Shinohara and Tsubaki (1959)	2	0.202–0.372	0.7–0.752	1.33	0.394–0.497	Field
Sukhodolov et al. (2006)	1	0.35	0.44	1	0.238	Field
<b>Antidunes</b>						
Fukuoka et al. (1982)	1	0.0355	0.852	1.6	1.44	Flume
Tanaka (1970)	1	0.0807	1.74	0.91	1.95	Flume
Williams (1970)	43	0.0271–0.157	0.466–1.69	1.35	0.826–2	Flume





**Table A4.** Summary of data used for the stability diagram with  $\tilde{h} = 0.15$  m.

Reference	# of points	flow depth $\tilde{h}$ [m]	flow velocity $\tilde{U}$ [m/s]	particle diameter $\tilde{D}$ [mm]	Froude number	Source
<b>Plane bed without suspension</b>						
Guy et al. (1966)	7	0.131–0.195	0.265–1.31	0.19–0.93	0.234–0.947	Flume
Williams (1970)	1	0.155	0.494	1.35	0.401	Flume
<b>Plane bed with suspension</b>						
Guy et al. (1966)	11	0.155–0.204	0.991–1.61	0.19–0.47	0.708–1.30	Flume
Taylor (1971)	2	0.112–0.114	0.866–0.878	0.228	0.819–0.838	Flume
<b>Plane bed with sheet flow</b>						
Williams (1970)	1	0.143	1.99	0.135	1.68	Flume
<b>Dunes</b>						
Gee (1975)	1	0.146	0.583	1	0.488	Flume
Guala et al. (2014)	2	0.193–0.209	0.661–0.717	1.8	0.48–0.5	Flume
Guy et al. (1966)	43	0.125–0.210	0.396–0.783	0.19–0.93	0.306–0.628	Flume
Leclair and Bridge (2001)	15	0.15–0.21	0.5–0.84	0.43–0.81	0.348–0.618	Flume
Venditti et al. (2005)	3	0.152–0.153	0.454–0.501	0.5	0.371–0.41	Flume
Wijbenga and Klaassen (1983)	3	0.2–0.21	0.485–0.49	0.78	0.346–0.35	Flume
Wren et al. (2007)	8	0.192–0.208	0.66–0.68	0.53	0.469–0.495	Flume
Shinohara and Tsubaki (1959)	1	0.202	0.7	1.33	0.497	Field
<b>Antidunes</b>						
Guy et al. (1966)	32	0.113–0.204	1.18–1.88	0.19–0.47	0.891–1.66	Flume
Tanaka (1970)	1	0.11	1.1	0.145	1.06	Flume
Guala et al. (2014)	9	0.138–0.157	1.00–1.69	1.35	0.826–1.40	Flume



**Table A5.** Summary of data used for the stability diagram with  $\tilde{h} = 0.30$  m.

Reference	# of points	flow depth $\tilde{h}$ [m]	flow velocity $\tilde{U}$ [m/s]	particle diameter $\tilde{D}$ [mm]	Froude number Fr	Source
<b>Plane bed without suspension</b>						
Guy et al. (1966)	3	0.308–0.314	0.402–0.454	0.93	0.229–0.261	Flume
<b>Plane bed with suspension</b>						
Guy et al. (1966)	4	0.213–0.241	1.05–1.16	0.19–0.54	0.686–0.787	Flume
Culbertson et al. (1972)	2	0.283–0.354	0.457–0.491	0.2–0.24	0.263–0.274	Field
<b>Dunes</b>						
Blom et al. (2003)	1	0.245	0.69	1.3	0.445	Flume
Guy et al. (1966)	50	0.216–0.405	0.472–1.01	0.19–0.93	0.246–0.65	Flume
Iseya (1984)	3	0.231–0.395	0.584–0.933	0.57	0.388–0.474	Flume
Kuhnle and Wren (2009)	2	0.219–0.224	0.59–0.6	0.5–0.503	0.398–0.409	Flume
Naqshband et al. (2014)	2	0.25	0.64–0.8	0.29	0.409–0.511	Flume
Wijbenga and Klaassen (1983)	2	0.301	0.588	0.78	0.342	Flume
Williams (1970)	13	0.213–0.223	0.53–0.78	1.35	0.364–0.539	Flume
Gabel (1993)	5	0.34–0.42	0.61–0.65	0.31–0.39	0.301–0.345	Field
Shinohara and Tsubaki (1959)	1	0.372	0.752	1.33	0.394	Field
Sukhodolov et al. (2006)	1	0.35	0.44	1	0.237	Field



**Table A6.** Summary of data used for the stability diagram with  $\tilde{h} = 1.0$  m.

Reference	# of points	flow depth $\tilde{h}$ [m]	flow velocity $\tilde{U}$ [m/s]	particle diameter $\tilde{D}$ [mm]	Froude number $Fr$	Source
<b>Plane bed with suspension</b>						
Simons (1957)	1	1.32	0.612	0.349	0.17	Field
Culbertson et al. (1972)	7	0.747–1.11	1.19–1.66	0.19–0.21	0.435–0.524	Field
<b>Dunes</b>						
Mezaki (1973)	8	0.9–1.35	0.49–0.83	0.21	0.154–0.272	Field