

Short communication: Potential of Sentinel 1 InSAR and offset tracking in monitoring post-cyclonic landslides activities in Reunion Island.

Marcello de Michele¹, Daniel Raucoules¹, Claire Rault², Bertrand Aunay² and Michael Foumelis^{1,3}

¹BRGM, Geophysical Imagery and Remote Sensing Unit, Orleans, 45000, France.

²BRGM, Direction de Actions Territoriales, Saint Denis, La Réunion, 97400, France.

³Aristotle University of Thessaloniki, Department of Physical and Environmental Geography, 541 24 Thessaloniki, Greece.

Correspondence to: Marcello de Michele (m.demichele@brgm.fr)

Abstract

This study examined the results of an interferometric Synthetic Aperture Radar (InSAR) and SAR Offset Tracking (OT) study on Cirque de Salazie (CdS), Reunion Island, France, within the context of the RENOVRIISK project, a multidisciplinary programme to study the cyclonic risks in the South-West Indian Ocean. Despite numerous landslides on this territory, CdS is one of the denser populated areas in Reunion Island. One of the aims of the project was to assess whether Sentinel 1 SAR methods could be used to measure landslide motion and/or accelerations due to post cyclonic activity on CdS. We concentrated on the post 2017 cyclonic activity. We used the Copernicus Sentinel 1 data, acquired between 30/10/2017 and 06/11 2018. Sentinel 1 is a C-band SAR, and its signal can be severely affected by the presence of changing vegetation between two SAR acquisitions, particularly in CdS, where the vegetation canopy is well developed. This is why C-band radars such as the ones onboard Radarsat or Envisat, characterized by low acquisition frequency (24 and 36 days, respectively), could not be routinely used on CdS to measure landslide motion with InSAR in the past. In this study, we used InSAR and OT techniques applied to Sentinel 1 SAR. We find that C-band SAR onboard Sentinel 1 can be used to monitor landslide motion in densely vegetated areas, thanks to its high acquisition frequency (12 days). OT stacking reveals a useful complement to InSAR, especially in mapping fast moving areas. In particular, we can highlight ground motion in the Hell-Bourg, Ile à Vidot, Grand Ilet, Camp Pierrot, and Belier landslides.

1. Introduction and study area


Landslide and erosion processes are causes of major concern to population and infrastructures on Reunion Island. These processes are led by the tropical climate of the island. The hydrological regime of the rivers is distinct owing to the coexistence of several major parameters that predispose it to extreme vulnerability. Holding almost all the world records for rainfall between 12 h (1170 mm) and 15 days (6083 mm), the island has a marked relief with a peak at 3,069 m, with exceptional cliffs that reach 1500 m in height.

35 CdS is the rainiest of the large erosional depressions on Reunion Island (Pohl et al., 2016) with an average annual
36 cumulative rainfall of approximately 3,100 mm since 1963; a minimum of 698 mm was recorded in 1990, and a
37 maximum of 5,893 mm was recorded in 1980.

38 This depression is surrounded by steep rock cliffs and filled with epiclastic material. Intense river erosion incises
39 deep valleys and has produced several isolated plateaus across the cirque.

40 The morphology, geology, and climate make CdS prone to erosion and ground movements. At least 19% of its
41 slope has been affected by landslides (Rault et al., 2022). The active landslides range from a large slow-moving
42 landslide of hundred million cubic meters to rapid and catastrophic slope failure with a volume exceeding one
43 million cubic meters.

44 Eleven slow moving landslides are identified in CdS (Figure 1). Their displacement rates range from a few cm/yr
45 to 1.15 m/yr and can accelerate after intense rainfall events, particularly because of cyclonic activity (e.g Belle et
46 al., 2014). These landslides are commonly observed on plateaus. They cover areas that vary from tens of thousands
47 of square m to several square km. Hell-Bourg (HB) and Grand-Ilet (GI) are the largest inhabited slow-moving
48 landslides in the cirque with volumes of $225 \times 10^6 \text{ m}^3$ and $215 \times 10^6 \text{ m}^3$, respectively (e.g. Rault et al, 2022).

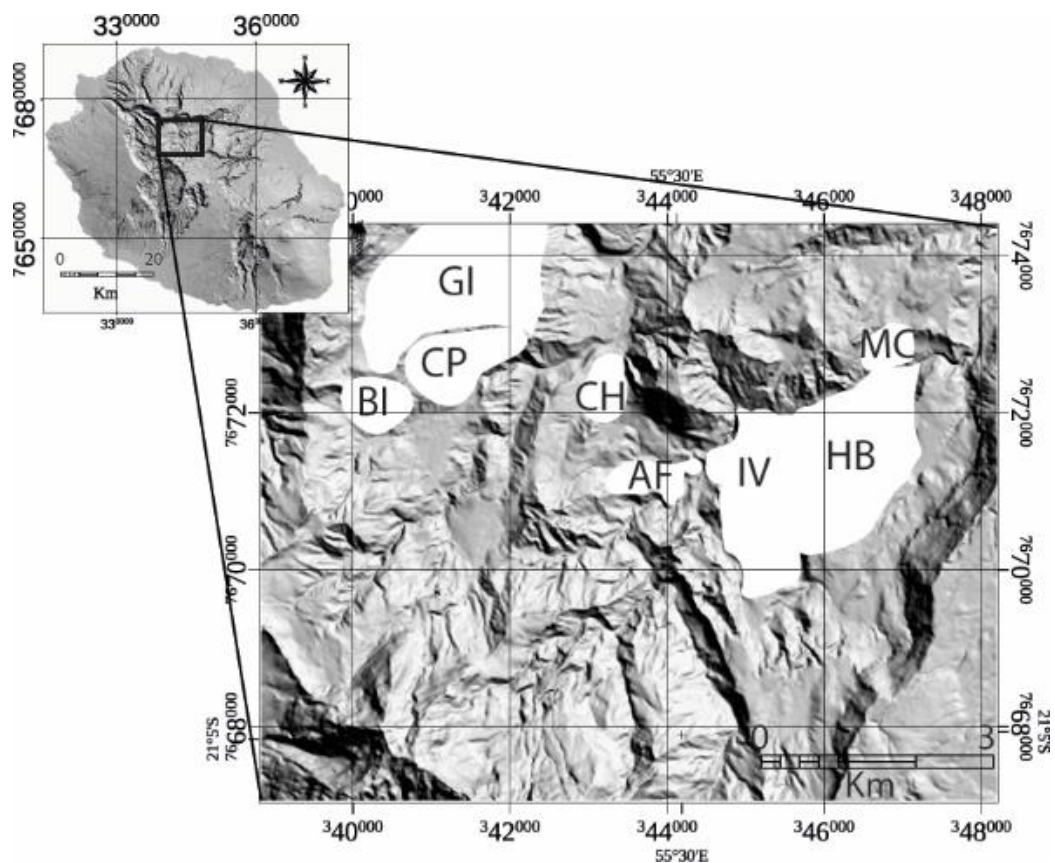

49
50 **Figure 1. Map of the study area. Slow moving landslides in the area, from existing catalogues, are highlighted in white.**
51 **MC : Mare à citron, HB: Hell-Bourg, IV: Ilet à Vidot, AF: Affouche, CH: Chemin Henry, BI: Belier, CP: Camp**
52 **Pierrot, and GI: Grand-Ilet. Modified form Rault et al. (2022).**

53

54 Slow-moving landslides can trigger secondary landslides along their steep scarps that eventually border rivers,
55 leading to increased solid loads. Therefore, slow-moving landslides are not only responsible for significant damage
56 to houses and infrastructure but are also involved in the formation of torrential flows and river dams (Liébault et
57 al. 2010, Tulet et al., 2021). Thus, understanding their kinematics/dynamics is essential for hazard and risk
58 mitigation at the scale of Reunion Island.

59 SAR methods demonstrated useful in highlighting landslides kinematics from space (e.g. Aslan et al., 2020 –and
60 references therein). While C band SAR can be used to comprehensively measure ground displacement, the study
61 area is particularly challenging for C band SAR since it is densely vegetated. In this study, we test whether InSAR
62 and OT techniques can be used to measure landslide kinematics in densely vegetated areas. Both techniques require
63 temporal signal coherence and therefore are usually not adapted densely in vegetated areas. Particularly, C-band
64 SAR signal can be severely affected by the presence of changing vegetation between two SAR acquisitions,
65 particularly in CdS, where the vegetation canopy is well developed. This is why C-band radars such as the ones
66 onboard Radarsat or Envisat, characterized by low acquisition frequency (24 and 36 days, respectively), could not
67 be routinely used on CdS to measure landslide motion with InSAR in the past. This limitation can be palliated
68 under certain circumstances, for instance improving repetition frequency between two or more satellite
69 acquisitions. In this study, we exploit the improved repetition frequency of Sentinel-1 SAR to test InSAR and OT
70 techniques in CdS after a cyclonic event in 2018. If successful, this study can serve as a demonstrator.

71

72 **1.1 Past studies regarding ground motion from space in CdS**

73 Few studies have used spaceborne remote sensing techniques to report on ground instabilities in CdS. Delacourt
74 *et al.* (2009) used a combination of optical (Spot 5 and aerial imagery) and synthetic aperture radar (SAR) data
75 (JERS-1 and Radarsat data) to measure ground motion on the Hell Bourg landslide. They applied the two
76 techniques to assess their performance and quantify ground motion associated with this landslide. They found an
77 average displacement of approximately 0.5 m/yr from 1997–2002. Le Bivic *et al.* (2017) used two pairs of ortho-
78 rectified SPOT-5 images at 2.5 m resolution on the Hell Bourg landslide. The first pair of images spanned the
79 period between 2002 and 2005. The second pair of images spanned the period 2006–2008. They reported that
80 during 2002–2005, the OT method yielded ground motion within the signal noise; they deduced that landslide
81 activity was low. From 2006–2008, they measured a maximum displacement of 8.5 ± 2 m (possibly due to the
82 storm Gamede).

83 Raucoules *et al.* (2016) used high resolution X-band SAR data from the TerraSAR-X satellite from 2010–2011.
84 They combined ascending and descending OT maps to extract the three dimensional displacement field of the HB
85 and GI landslides. They reported that ground displacement reached 1 ± 0.25 m/y vertically and 0.65 ± 0.25 m/y
86 horizontally. They also used InSAR combined with X-band data from the Cosmo-SKYMED satellite to measure
87 centimetric displacements on the borders of the HB and GI landslides. The X-band InSAR signal was incoherent
88 elsewhere.

89 Raucoules *et al.* (2018a,b; 2020) used space-borne high-resolution L-band SAR (ALOS-2/PALSAR2 data in
90 StripMap SM1 mode) both with interferometric synthetic aperture radar (InSAR) and OT. They derived two
91 components of the displacement field for the HB landslide. The displacement reached approximately 1 m/y from

92 2014–2016. They reported that L-band SAR performed significantly better than the C-band SAR available at the
93 time of the study.

94

95 **1.2 Aim of this study**

96 Landslides displacement rates in CdS can accelerate after intense rainfall events, particularly during cyclonic
97 activity. Their kinematic might change during such extreme events; new landslides might appear. Global
98 Navigation Satellite System (GNSS) in the study area yields precise time series at the measurement stations. SAR
99 methods are potentially able to spatialize the ground motion information and might reveal ground motion in
100 unexpected areas. The aim of this study is to assess whether Sentinel 1 SAR methods – both InSAR and OT- could
101 be used to measure landslide motion and accelerations caused by post cyclonic activity in a densely vegetated area
102 such as CdS. This study complements the one by Raucoules *et al.* (2018a,b ; 2020), who used L-band InSAR and
103 OT to measure ground motion in CdS. The measurement of ground motion with C band SAR in densely vegetated
104 areas is challenging because the radar waves interact with the vegetation canopy and may yield an incoherent
105 InSAR signal if temporal changes occur between the two SAR scenes. Therefore, InSAR signal coherence largely
106 depends on the revisit time of the satellite. The shorter the revisit time is, the higher the InSAR signal coherence,
107 and the faster the ground motion has to be in order to be measured by InSAR. The history of C-band SAR data
108 over la Réunion island is non-linear. The European Space Agency (ESA) Earth Remote Sensing Satellite (ERS-
109 1 and ERS-2) SAR platforms did not cover La Réunion Island owing to orbit incompatibilities. The Canadian Space
110 Agency Radarsat 1-2 has flown over la Réunion, but they acquired data every 24 days (Delacourt *et al.*, 2009),
111 which makes the InSAR signal incoherent in densely vegetated areas such as the CdS. Similarly, the ESA Advance
112 SAR (ASAR) sensor onboard the ENVISAT satellite acquired data every 35 days. Therefore, the SAR
113 interferometric signal was incoherent for this C-band radar with a quasi-monthly repeat cycle. The Copernicus
114 Sentinel 1 satellite can resolve these problems. Sentinel 1 hosts a C-band SAR (wavelength = 5.5 cm) whose
115 interferometric signal is usually incoherent over densely vegetated areas; however, the high repetition frequency
116 of Sentinel 1 (12 days in La Réunion, 6 days in mainland Europe until 2021) makes the InSAR signal potentially
117 suitable for measuring land displacements in densely vegetated areas (e.g. Aslan *et al.*, 2020). It could be
118 complementary or alternative to L-band SAR interferometry (Delacourt *et al.*, 2009; Raucoules *et al.* 2020) and
119 *in-situ* techniques in La Réunion.

120

121 **1.3 InSAR and Offset Tracking techniques**

122 In this study, we designed the experiment as follows. We applied two SAR methods, InSAR and OT. These two
123 methods could be complementary because InSAR can measure slow moving landslides, typically a small fraction
124 of the employed wavelength, while OT could measure large ground motions, higher than the pixel size of the SAR
125 scene. In contrast, OT may be limited in the measurement of small ground motions, depending on the pixel size,
126 because the nominal lower bound precision is $1/10^{\text{th}}$ of the pixel size of the image employed on a single
127 correlogram.

128 InSAR methods rely on the measurement of the changes in SAR phases among multiple SAR scenes using
129 interferometric processing (e.g. Massonnet and Feigl, 1998). It is a widely used methodology to measure ground

130 displacements from space, in many disciplines related to tectonics (e.g. Elliot et al., 2020), volcanology (e.g.
131 Doubre et al., 2017) and gravitational failures (e.g. Aslan et al., 2020). Here, we used the stacking procedure
132 implemented in the Gamma processing chain (GAMMA, 2015). The stacking procedure combines multiple SAR
133 scenes and yields ground displacement rate in the form of ground velocity map. It is used to estimate the linear
134 rate of differential phase starting from a set of unwrapped differential interferograms. The individual interferogram
135 phases are weighted by the time interval in estimating the phase rate. The underlying assumption is that
136 atmospheric statistics are stationary for the set of interferograms. Stacking can be applied to unwrapped
137 interferometric phases as well as to a set of OT correlograms.

138 OT is a sub-pixel image correlation technique. This technique matches two or more images at each point on a grid,
139 analyzing the degrees of local correlation at each step. Differences in the local instantaneous frequency of the
140 images result in sub-pixel spatial differences in ground patterns. Measurements must be performed with subpixel
141 accuracy because the amplitude of the ground displacement is often lower than the resolution of the images,
142 depending on the sensor used.

143 Sub-pixel image correlation technique for measuring ground surface displacements can be applied to optical (e.g.
144 Michel et al., 1999; de Michele and Briole, 2007) and SAR amplitude images (e.g. Michel and Rignot, 1999; de
145 Michele et al., 2010a, 2010b). The main differences between optical and SAR images are caused by the oblique
146 SAR acquisition geometry. Therefore, instead of having east-west and north-south offsets as in optical OT, SAR
147 OT has with slant range and azimuth offsets. Slant range is the line of sight (LOS) direction, or look angle of the
148 satellite. The azimuth is the flying direction of the satellite (nominally 98° for Sentinel 1; nearly north-south).
149 Moreover, azimuth offsets are «topography free», and slant range offsets are calculated in the LOS and, therefore,
150 contain a contribution from vertical offsets, depending on the viewing angle. Thus, OT yields two components of
151 the deformation field for one SAR scene. For details on this methodology, please refer to Michel & Rignot (1999)
152 and Michel et al., (1999), who used it with shuttle imaging radar (SIR-C) ERS radar amplitude images, and
153 Raucoules et al. (2013), who applied the OT method to multi temporal SAR images at La Vallette landslide. The
154 OT technique provides a measurement of the ground displacement from the analysis of the geometrical
155 deformation between the two SAR amplitude images. Usually SAR images with a small baseline are chosen to
156 reduce the stereoscopic effect and geometric decorrelation. For Sentinel 1, the orbit tubes are steered within 100
157 m maximum. Therefore, the topographic contribution to the OT in the LOS direction is negligible. In this study,
158 we estimated the range and azimuth offset fields using cross correlation optimization of the input intensity images.
159 This algorithm was implemented in the GAMMA software with the name of “offsets tracking” (e.g. Strozzi et al.,
160 2002). GAMMA is a standard SAR processing software, which results have been validated among other available
161 SAR processing chains (e.g. Raucoules et al., 2009).

162

163 **2. Data and processing steps**

164 At the time of this study experimental design, the Sentinel-1 mission comprised a constellation of two polar-
165 orbiting satellites, operating day and night, hosting a C-band synthetic aperture radar, enabling them to acquire
166 imagery regardless of the weather. We used 26 Sentinel 1 data in descending, stripmap mode, acquired every 12
167 days from October 30, 2017, to November 06, 2018. Sentinel 1 data are provided by the European Space Agency,

168 within the Copernicus Program of the European Union. Technically, we downloaded them as Single Look
169 Complex (SLC) data from the Copernicus Scientific Data Hub (<https://scihub.copernicus.eu>). We did not use the
170 ascending mode, as it is less sensitive to ground motion in CdS given the SAR shadow and the unfavorable relative
171 geometry between the SAR orbit and ground motion (e.g. Raucoules et al., 2020).

172 First, we co-registered the SAR data. Then, we created differential interferograms with data pairs spanning 12 days
173 intervals. The topographic contribution to the interferometric phase was modelled using a DEM from the Shuttle
174 Radar Topography Mission (SRTM). We unwrapped the differential interferograms with the minimum cost flow
175 algorithm (Constantini, 1998). Depending on the water vapor content in the air, there may be an interferometric
176 phase delay due to the SAR signal crossing multiple tropospheric layers. To a first approximation, this delay is
177 proportional to the topographic slope. Therefore, we corrected the tropospheric contribution to the interferometric
178 phase by linear regression with the DEM. At this point, we performed the stacking procedure, producing a velocity
179 map. The stacking procedure starts from a set of unwrapped interferometric phases along with the time interval in
180 days of the SLC-2 relative to the reference SLC-1. The individual unwrapped interferograms are weighted by the
181 time interval in estimating the rate. The underlying assumption is that atmospheric statistics are stationary for the
182 set of N interferograms. The formula for the estimated phase rate, in radians per year, is given by (Le Mouelic et
183 al., 2005; GAMMA, 2015):

$$184 \quad \text{phase rate} = \frac{\sum_{j=1}^N \Delta t_j \varphi_j}{\sum_{j=1}^N \Delta t_j^2} \quad (1)$$

185 Where N is the number of interferograms, φ_j is one given interferogram, t is the time interval inherent with each
186 interferogram (SLC-2 relative to the reference SLC-1). If the matching is not found (low signal coherence), that
187 particular interferogram value is not used in the stacking procedure. So that the same scatterers are identified on
188 many images, but not all the images are used. It follows that the more the images, the more the stacking
189 redundancy, the more the precision of the results. The phase rates are converted into velocity values, in meters per
190 year. Afterwards, we orthorectified the velocity map. The results are shown in Figure 2.

191 For the OT procedure, we began from the co-registered SAR data. Instead of the phases, we used the amplitude of
192 the SAR signal and extracted multi look complex images (MLI) for each acquisition date. Multi look processing
193 degrades the image resolution but reduces the image speckle. Because OT sensitivity to ground motion depends
194 on the pixel resolution, we required a tradeoff between image noise and multi looking. For this study, our choice
195 was multi looking with a factor of 3 in azimuth and 2 in range directions. This led to pixel sizes of 8.2 m in the
196 azimuth direction and 7.9 m in the range directions. We used a correlation window of 128X128 pixels and searched
197 for 1024 measures in range and azimuth respectively. The OT technique is nominally less affected by temporal
198 signal decorrelation than the InSAR technique. Therefore, we used all possible image couples, leading to the
199 creation of 351 correlograms in both range and azimuth directions. Then, we applied the stacking procedure
200 described above, to create one velocity map in the range direction and one in the azimuth direction. Instead of the
201 unwrapped InSAR phases in equation (1), we used the pixel offset values found in the OT correlograms (in meters).
202 As for the InSAR phases, if the matching is not found, that particular correlogram value is not used in the stacking
203 procedure. So that the same ground patterns are identified on many images, but not all the images are used. Finally,
204 we orthorectified the results. The orthorectification implies spatial resampling via interpolation –in order to keep
205 the regular sampling on the final map.

206

207

208 **3. Results**

209 We recognized and mapped three landslide areas in Salazie, active during the study period. Hell Bourg, Ilet à Vidot
210 and an area that was considered stabilized or dormant, possibly corresponding to Crete de Salaze.

211 Hell Bourg and Ilet a Vidot are two major inhabited compound landslides of Salazie. These landslides move
212 continuously and typically accelerate following heavy rainfall. They occupy approximately 10% of the CdS surface
213 area. They all stand on volcanoclastic material interpreted as volcanic debris-avalanche deposits or as debris-
214 flow/mud-flow deposits by Rault et al. (2022). Hell Bourg is a compound landslide covering a surface of
215 approximately 2.8 km². Ilet a Vidot is an active plateau located northwest of Hell Bourg and covers an area of 2.3
216 km².


217 In the next paragraph we describe both InSAR and OT results in more details.

218

219 **3.1 InSAR**

220 The stacking InSAR results are shown in Figure 2. They are presented as a mean velocity map, where ground
221 motion is measured in the LOS of the satellite. InSAR is only sensitive to ground motion occurring in the LOS
222 direction. Motion away from the satellite is represented in blue. Motion towards the satellite is represented in red.
223 Complex combinations of those two directions of motion may lead to zero apparent motion on the InSAR velocity
224 map. From Figure 2, we observe manifold improvements with respect to velocity maps produced from former C-
225 band InSAR missions (Delacourt *et al.*, 2009). First, we noticed that the InSAR signal was coherent over the study
226 area, which was not expected given the densely vegetated tropical area (Figure 2, right). Second, we can see a
227 clear pattern of ground motion in the Hell-Bourg area, approximately in the interval of values ± 0.5 m/yr and
228 spatially consistent with ground observations. Figure 2 also shows ground motion on the Ilet à Vidot (IV) landslide.
229 The InSAR signal direction on both HB and IV landslides is quite complex. This suggests the existence of complex
230 internal landslides kinematics such as stretching of the main landslide body in HB and dismantling of IV plateau
231 on both sides by landslides moving either eastward or westward, as expected for a compound slide and identified
232 in the field by Rault et al. (2022). It also suggests a rotational component of ground motion. In this study, the
233 InSAR signal was surprisingly coherent with a certain level of noise. We calculated the noise as ± 2 cm/yr on the
234 InSAR velocity map. To minimize coherence loss, we used interferograms with 12 days times span only, excluding
235 larger time-span interferograms. Owing to these limitations, we were unable to capture very slow ground motions
236 (< 2 cm/yr).

237

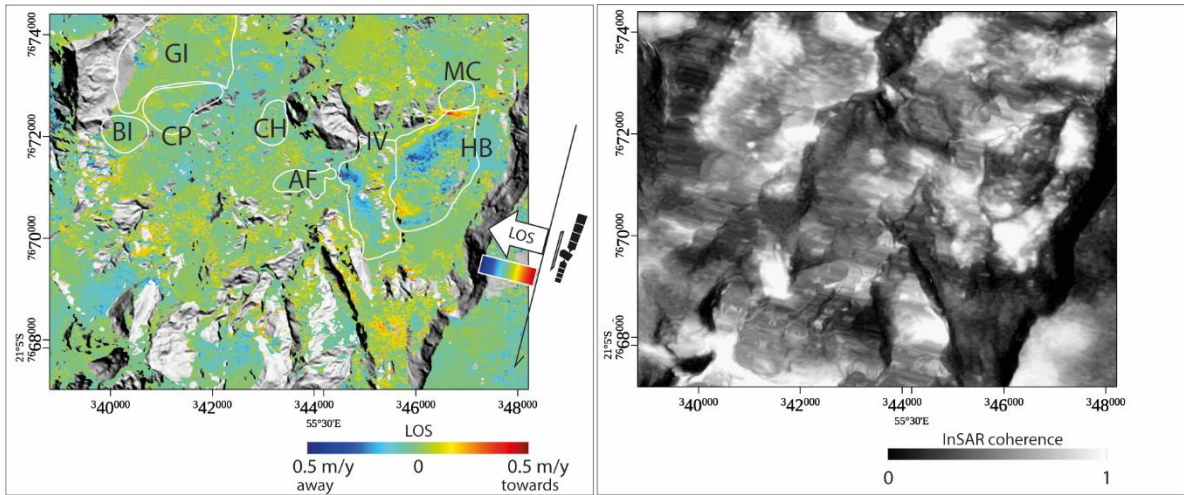

238


239 **Figure 2.** Left: InSAR velocity map in the LOS of the satellite, using the descending mode. A ground displacement
 240 pattern is clearly visible in the Hell-Bourg area. Right: InSAR signal coherence. Coherence values lower than 0.3 are
 241 masked in the left panel.

242

243 **3.2 Offset tracking Azimuth and Range**

244 We show the OT results in Figure 3. Because OT is a subpixel correlation technique, its precision depends on the
 245 image pixel size. Nominally, the correlator implemented into the GAMMA processing chain is as precise as 1/10th
 246 of the pixel size (e.g. Raucoules *et al.*, 2019). Therefore, because the MLI pixel sizes were 8.2 m in the azimuth
 247 direction and 7.9 m in the range directions, we can expect precisions of the orders of 0.8 m in a single correlograms.
 248 Thus, we cannot use OT to measure ground motions smaller than 0.8 m on a single correlogram. The precision
 249 increases by applying the stacking procedure. Moreover, the stacking procedure can compensate the component
 250 of the pixel offsets that may be caused by non-zero baselines between Sentinel 1 orbits, which is proportional to
 251 topography. Furthermore, OT does not have higher limits for ground motion detection. This latter characteristic is
 252 particularly helpful in CdS, where metric ground motion is expected, particularly within the HB area.

253

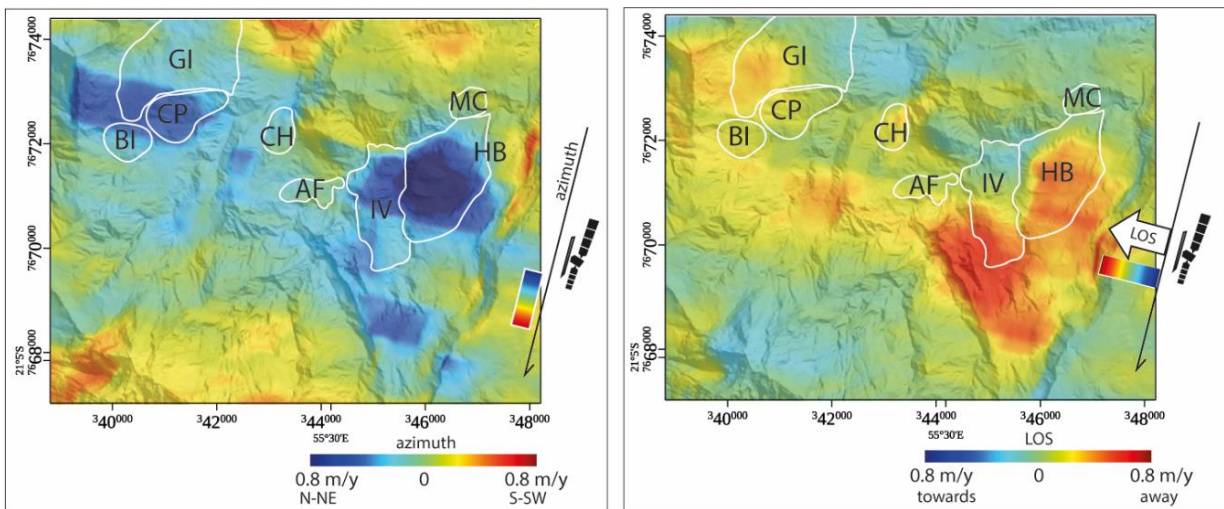

254

255 **Figure 3.** Azimuth (left) and LOS (right) OT velocity maps.


256 The first observation from Figure 3 is that the OT stacking procedure applied to Sentinel 1 MLIs provides
 257 meaningful results, both in the azimuth and slant range directions. From Figure 3, we find that the fastest ground
 258 motion in the azimuth direction is localized on the Hell Bourg landslide, N-NW section of the IV landslide, and
 259 Camp Pierrot (CP) landslide. Ground motion in Hell Bourg can reach 1 m/yr in the azimuth direction. The OT
 260 signal in the azimuth direction is also visible on a central section of the CP and IV landslides, as fast as 0.7 m/yr.
 261 In the slant range direction, the OT ground motion signal is localized in the HB landslide, reaching 0.8 m/yr, away
 262 from the satellite. Figure 3 highlights motion on the S-SE sections of the GI and IV landslides. We also observe
 263 an unexpected pattern of ground motion S-SE of HB and south of IV, that was consistent with the geomorphology
 264 of the area but situated in a non-instrumented, uninhabited area on the ground. This signal is intriguing and must
 265 be validated against *in situ* observations. It might correspond to an area that was considered stabilized or dormant,
 266 called Crete de Salaze.

267 To further investigate this latter signal, we considered the horizontal component of LOS motion only, combined
 268 with the azimuth velocities, to extract OT horizontal ground velocities regardless of the motion direction. The
 269 hypothesis holds in CdS because the horizontal motion (in HB for instance) is almost 7 times larger than the
 270 vertical velocity. Therefore, we applied :

$$271 \quad |v_h| = \sqrt{OT_{az}^2 + (OT_{LOS}/\sin i)^2}, \quad (2)$$

272 to extract the horizontal velocity map, $|v_h|$, where i is the satellite viewing angle (37° in this case study), OT_{AZ} is
 273 the azimuth OT and OT_{LOS} is the range OT (Figure 4). Figure 4 shows that the OT detectable ground motion is
 274 concentrated in the HB, IV, and south of IV landslides. There is also a weaker but noticeable ground motion signal
 275 at the GI and CP landslides. Moreover, there is a marked signal S-SE of IV. This area, considered stabilized or
 276 dormant, must be investigated further, the OT signal may be due to a post cyclonic burst of ground motion.

277

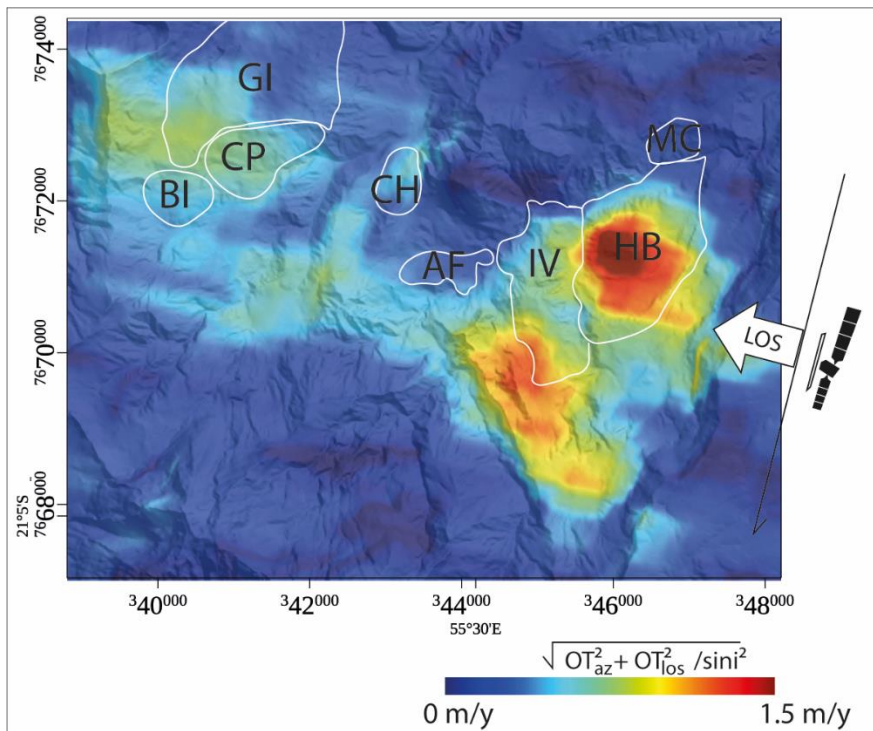


278

279 **Figure 4. Amplitude of the OT horizontal ground velocities independent of direction. We consider only the horizontal**
 280 **component of LOS : $\sqrt{OT_{az}^2 + OT_{los}^2 / \sin^2 i}$. i is the LOS viewing angle (37°). The hypothesis is that the horizontal**
 281 **motion in CdS (in HB for instance) is almost 7 times larger than the vertical velocity.**

282

283 4. Comparison with global navigation satellite system (GNSS) data

284 To gain some insight into the accuracy of SAR velocities maps, we performed a cross-comparison with GNSS
 285 campaigns available at CdS. In this exercise, we compared SAR velocities with GNSS velocities acquired over
 286 the time span May 2018 - February 2020. The GNSS velocities were calculated using 93 geodetic markers across
 287 the cirque (Figure 5). They were obtained from the position of the markers measured with a differential GNSS
 288 during two campaigns of measurements: May 2018 and January 2020.

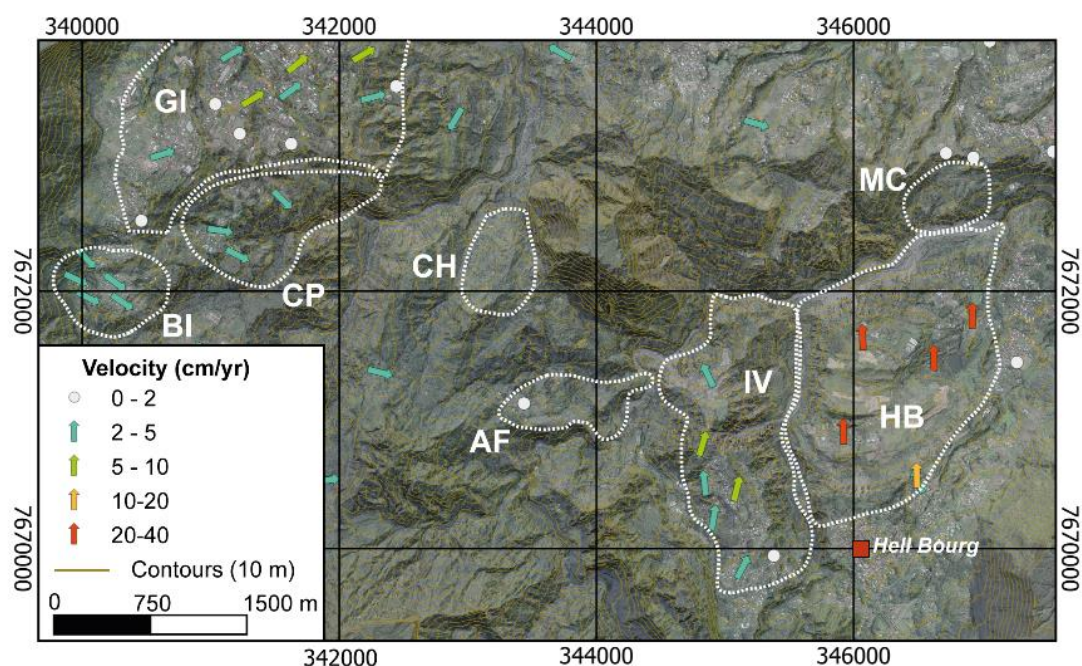

289

290 **Figure 5. Locations and horizontal velocities of GNSS campaigns. Velocities refers to campaigns in May 2008 and**
 291 **January 2020.**


292

293 GNSS measurement accuracy varies from one site to another depending on environmental factors (e.g., vegetation,
 294 proximity to buildings, cirque cliffs, and steep ramparts). For each campaign of measurement, the position of a
 295 benchmark was measured four successive times. The final position of the benchmark is the average of these four
 296 measurements. Measurements with deviations of more than 5 cm in altimetry and 3 cm in planimetry were removed
 297 from the dataset. The positioning accuracies are of the order of 2 cm in planimetry and less than 5 cm in altimetry
 298 (Mazué et al., 2013).

299 To compare GNSS and SAR velocities (both InSAR and OT), we must project the GNSS x, y, and z values into
 300 LOS (= OT range) and OT azimuth direction, by considering that Sentinel 1 had a heading of -167.66° South with
 301 a look angle of 36.93° . We then obtained $GNSS_{sar}$ values in LOS, range and azimuth direction. Then, we discretized

302 the GNSS_{sar} values into a number of intervals of 0.03 m width. For each interval, we calculated the median and
303 identified the geographic location of each point in the interval. At those points, we extracted median GNSS_{sar} and
304 SAR values. Then, we plotted GNSS_{sar} versus SAR for each interval. The results are scatterplots showing GNSS
305 (LOS) vs InSAR (Figure 6) and GNSS (range; azimuth) vs SAR OT (range, azimuth) in Figure 7.


306 From Figure 6, we see that the comparison between InSAR velocities and GNSS_{sar} velocities is satisfactory.
307 However, there was a general underestimation of motion for the InSAR technique (i.e., InSAR=0.8xGNSS). This
308 may be due to an uncompensated residual ramp in the InSAR velocity map.

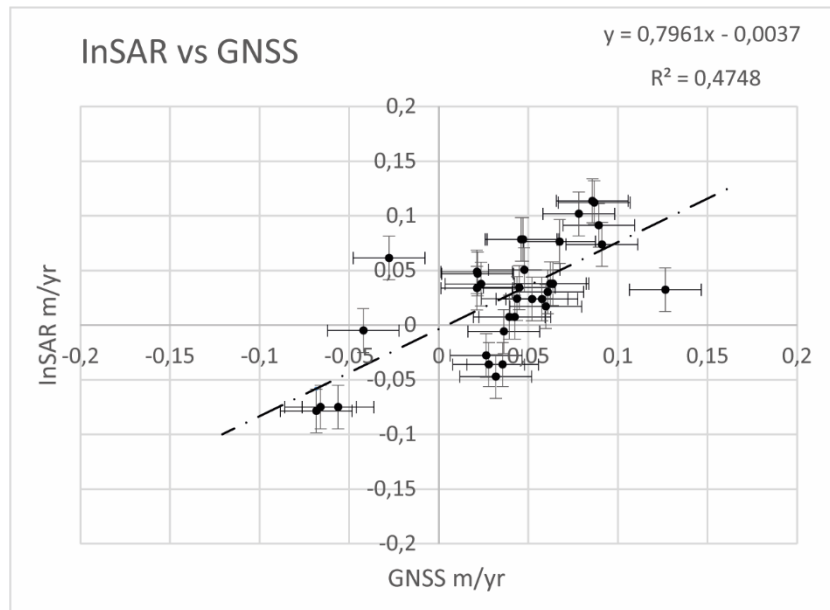

309
310 **Figure 6. InSAR VS GNSS (LOS) data (m/yr). InSAR is not sensitive to velocities higher than 2 cm/yr. Therefore, we**
311 **mask all values that are related to GNSS values higher than |2| cm per year.**

312
313 In Figure 7, we show the comparison between GNSS_{sar} and OT velocities in range and azimuth directions. We see
314 that the comparison between SAR and GNSS_{sar} velocities is good. There is a general underestimation of motion
315 by the OT technique in the azimuth direction (i.e., OT_{azimuth}=0.5xGNSS_{sar}). This may be due to an
316 uncompensated residual ramp in the OTs velocity maps.

317

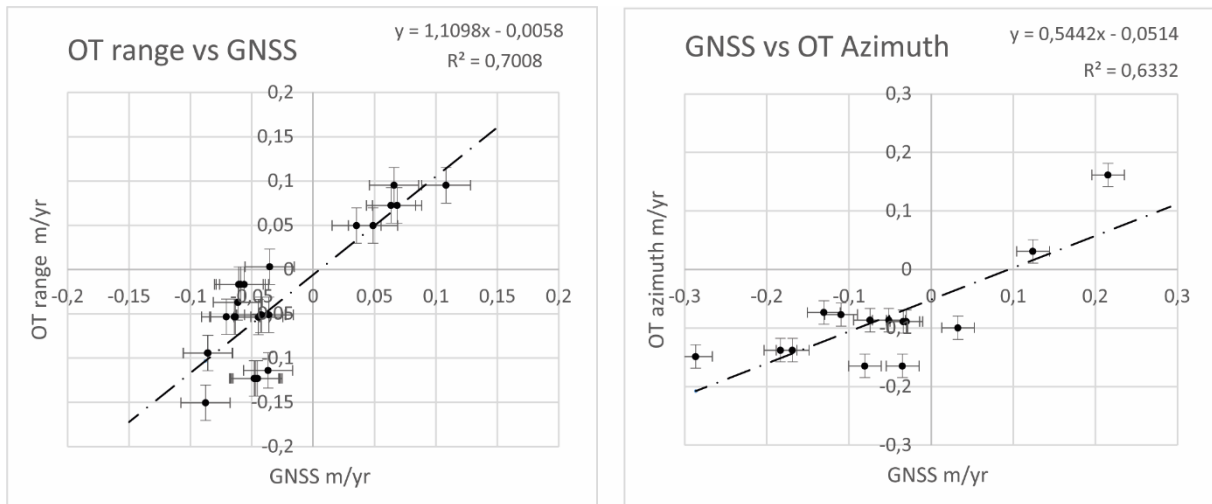

318

319

320 **Figure 7. Left. GNSS_{sar} vs OT in the range direction (m/yr). Right: GNSS_{sar} vs OT in the azimuth direction (m/yr).**
 321 **Masked GNSS values between ±3 cm per year**

322

323 5. Discussion, conclusions, and perspectives

324 In this study, we applied Sentinel 1 SAR analysis, both InSAR and OT, to the measurement of ground motion on
 325 Cirque de Salazie, Reunion Island, France. Thanks to the high repetition frequency of Sentinel 1, the C-band
 326 InSAR signal was coherent in this region, in contrast with past C-band studies on the study area. This result allows
 327 us to produce interpretable velocity maps, both with InSAR and OT techniques. The InSAR velocity map provided
 328 spatially detailed ground velocities in the LOS of the satellite, with precision reaching a fraction of the SAR
 329 wavelength. The comparison between InSAR and GNSS velocities is satisfactory. The Sentinel 1 MLIs OT
 330 technique provided useful measurements. Nevertheless, the comparison between OT and GNSS velocities
 331 highlighted several biases that require a more detailed investigation. The biases may be due to a residual orbital
 332 ramp in the OT velocities but also the fact that OT precision is a function of the MLI pixel size. Because the InSAR
 333 and OT techniques provided “relative” measurements, the biases with respect to GNSS suggested that absolute
 334 calibration of SAR maps is needed to compare SAR and GNSS results.

335 Within the InSAR and OT detection limits and the period of SAR measurements (October 2017–November 2018)
 336 this study displayed the ground motion and internal kinematics on HB landslide, the N-NW section of IV landslide,
 337 and CP landslide. Moreover, we point out an unexpected pattern of ground motion S-SE of HB and South of IV,
 338 consistent with the geomorphology of the area but situated in a non-instrumented, uninhabited area on the ground.
 339 We suggest that it might correspond to an area that was considered stabilized or dormant, called Crete de Salaze.
 340 Motion in this area might have been reactivated as a consequence of heavy rainfall and thus represents a post
 341 cyclonic burst of ground motion.

342 Three GNSS sites on the South-Western part of IV landslides indicates ground motion in this sector of CdS.
 343 Therefore, this noticeable signal requires further consideration and investigation.

344 We need precise time series of this ground motion, localized on those three specific areas, to discriminate whether
345 we can highlight rheological changes due to the post-cyclonic activity.

346 There are rooms for methodological improvement:

347 Even though the Sentinel 1 ascending mode is less adapted in CdS due to shadow and layover effects depending
348 on the look angle, it may be possible to exploit the few coherent pixels to extract the vertical and east-west
349 components of ground displacement, by a combination of Sentinel 1 InSAR in ascending and descending modes.
350 The exploitation of both InSAR and OT from Sentinel 1 and other SAR missions (e. g. ALOS 2, TerraSAR X)
351 would improve data coverage, spatially and temporally. OT with Sentinel 1 data revealed precious to measure
352 large ground motion in CdS. In this study, we calculated OT on MLIs 3-2; we could run an experiment to determine
353 whether OT from MLIs 2-1 or even MLIs 1-1 could lead to more accurate results.

354 In conclusion, Sentinel 1 InSAR and OT present high potential for routine monitoring on CdS, as a complement
355 to *in situ* techniques (i e., Rault et al., 2022). This study presented a solid premise for the future exploitation of the
356 European Ground Motion Service (EGMS) of the European Union Copernicus program, based on Sentinel 1
357 InSAR, in CdS.

358

359 **References**

- 360 Aslan, G., Foumelis, M., Raucoules, D., De Michele, M., Bernardie, S., and Cakir, Z.: Landslide Mapping and
361 Monitoring Using Persistent Scatterer Interferometry (PSI) Technique in the French Alps. *Remote Sens.*, 12, 1305,
362 <https://doi.org/10.3390/rs12081305>, 2020.
- 363 Belle, P., Aunay B., Bernardie, S., Grandjean, G., Ladouche, B., Mazué, R., and Join, J-L.: The application of an
364 innovative inverse model for understanding and predicting landslide movements (Salazie cirque landslides,
365 Reunion Island). *Landslides*, 11, 343–355, 2014.
- 366 Costantini, M.: A novel phase unwrapping method based on network programming. *IEEE Trans. Geosci. Remote*
367 *Sens.*, 36, 3, 813–821, 1998.
- 368 Delacourt, C., Raucoules, D., Le Mouélic, S., Carnec, C., Feurer, D., Allemand, P., and Cruchet, M.: Observation
369 of a Large Landslide on La Reunion Island Using Differential Sar Interferometry (JERS and Radarsat) and
370 Correlation of Optical (Spot5 and Aerial) Images. *Sensors*, 9(1), 616-630, 2009.
- 371 de Michele, M., and Briole, P.: Deformation between 1989 and 1997 at Piton de la Fournaise volcano retrieved
372 from correlation of panchromatic airborne images. *Geophys. J. Int.*, 169(1), 357–364, [doi:10.1111/j.1365-](https://doi.org/10.1111/j.1365-246X.2006.03307.x)
373 [246X.2006.03307.x.](https://doi.org/10.1111/j.1365-246X.2006.03307.x), 2007.
- 374 de Michele, M., Raucoules, D., Lasserre, C., Pathier, E., Klinger, Y., Van Der Woerd, J., de Sigoyer, J., and Xu,
375 X.: The M_w 7.9, 12 May 2008 Sichuan earthquake rupture measured by sub-pixel correlation of ALOS PALSAR
376 amplitude images. *Earth Planet Space*, 62, 875–879, <https://doi.org/10.5047/eps.2009.05.002>, 2010.
- 377 de Michele, M., Raucoules, D., de Sigoyer, J., Pubellier, M., and Chamot-Rooke, N.: Three-dimensional surface
378 displacement of the 2008 May 12 Sichuan earthquake (China) derived from Synthetic Aperture Radar: evidence
379 for rupture on a blind thrust. *Geophysical Journal International*, 183, 3, 1097–1103, [https://doi.org/10.1111/j.1365-](https://doi.org/10.1111/j.1365-246X.2010.04807.x)
380 [246X.2010.04807.x](https://doi.org/10.1111/j.1365-246X.2010.04807.x), 2010.
- 381 Doubre, C., Déprez, A., Masson, F., Socquet, A., Lewi, E., Grandin, R., and Abayazid, A. : Current deformation
382 in Central Afar and triple junction kinematics deduced from GPS and InSAR measurements. *Geophysical Journal*
383 *International*, 208(2), 936-953. [doi: 10.1093/gji/ggw434](https://doi.org/10.1093/gji/ggw434), 2017.
- 384
- 385 Elliott, J.R., de Michele, M. and Gupta, H.K : Earth Observation for Crustal Tectonics and Earthquake Hazards.
386 *Surv Geophys* 41, 1355–1389, <https://doi.org/10.1007/s10712-020-09608-2>, 2020.
- 387 GAMMA: Differential Interferometry and Geocoding Software –user manual, GAMMA Remote Sensing AG,
388 Gumligen, Switzerland, 54 pp, 2015.
- 389 Le Bivic, R., Allemand, P., Quiquerez, A., and Delacourt, C. : Potential and Limitation of SPOT-5 Ortho-Image
390 Correlation to Investigate the Cinematics of Landslides: The Example of “Mare à Poule d’Eau” (Réunion, France).
391 *Remote Sensing*, 9(2), 106, <https://doi.org/10.3390/rs9020106>, 2017.
- 392

393 Le Mouélic, S., Raucoules, D., Carnec, C., King C. : A Least-squares adjustment of multi-temporal InSAR data –
394 Application to the ground deformation of Paris. *Photogrammetric Engineering and Remote Sensing*, 71(2), 197-
395 204, 2005.

396 Massonnet, D., and Feigl, K.: Radar interferometry and its application to changes in the Earth's surface. *Rev.*
397 *Geophys.*, 36, 4, 441, 1998.

398 Mazué, R., Aunay, B., and Belle, P. (2013). Suivi des réseaux géodésiques dans les cirques de La Réunion.
399 Rapport BRGM No. RP-61994-FR – p. 66. Available at <http://infoterre.brgm.fr/rapports/RP-61994-FR.pdf>

400 Michel, R., and Rignot, E.: Flow of Glaciar Moreno, Argentina, from repeat-pass Shuttle Imaging Radar images:
401 a comparison of the phase correlation method with radar interferometry. *J. Glaciol.* 45, 93-100, 1999.

402 Michel, R., Avouac, J. P., and Taboury, J.: Measuring ground displacements from SAR amplitude images:
403 Application to the Landers earthquake, *Geophys. Res. Lett.*, vol. 26, no. 7, pp. 875–878, Apr. 1999.

404

405 Pohl, B., Morel, B., Barthe, C., & Bousquet, O. : Regionalizing rainfall at very high resolution over La Réunion
406 Island: A case study for tropical Cyclone Ando. *Monthly Weather Review*, 144(11), 4081–4099.
407 <https://doi.org/10.1175/MWR-D-15-0404.1>, 2016.

408

409 Raucoules, D., Bourguine, B., de Michele, M., Le Cozannet, G., Closset, L., et al. : Validation and intercomparison
410 of Persistent Scatterers interferometry: PSIC4 project results. *Journal of Applied Geophysics*, 68 (3), 335-347,
411 2009.

412 Raucoules, D., de Michele, M., Malet, J-P., and Ulrich, P.: Time-variable 3D ground displacements from high-
413 resolution synthetic aperture radar (SAR). Application to La Valette landslide (South French Alps), *Remote*
414 *Sensing of Environment*, 139, 198-204, 2013.

415 Raucoules, D., de Michele, M., Mazué, R., and Aunay, B.: MvTerre-2 : Observation de mouvements de terrain
416 sur le cirque de Salazie à partir de mesures de télédétection radar satellitaire, Rapport BRGM RP- 61187-FR, 51
417 p. Available at <http://infoterre.brgm.fr/rapports/RP-61187-FR.pdf>, 2016.

418 Raucoules, D., Tomaro, F., Foumelis, M., Negulescu, C., de Michele, M., and Aunay, B. : Landslide Observation
419 from ALOS-2/PALSAR-2 Data (Image Correlation Techniques and Sar Interferometry). Application to Salazie
420 Circle Landslides (La Reunion Island). *IGARSS 2018 – 2018 IEEE International Geoscience and Remote Sensing*
421 *Symposium*, Jul 2018, Valencia, France. pp.506-509, 10.1109/IGARSS.2018.8517998, hal-02734613.

422 Raucoules, D., Le Cozannet, G., de Michele, M., and Capo, S.: Observing water-level variations from space-borne
423 high-resolution Synthetic Aperture Radar (SAR) image correlation, *Geocarto International*, 33(9), 977-987, 2018.

424 Raucoules D., de Michele, M., and Aunay, B.: Landslide displacement mapping based on ALOS-2/PALSAR-2
425 data using image correlation techniques and SAR interferometry: Application to Salazie Circle landslides (La
426 Réunion Island). *Geocarto International*, 35, 113-127, 2020.

- 427 Rault, C., Thiery, Y., Chaput, M., Reninger, P. A., Dewez, T. J. B., Michon, L., and Aunay, B.: Landslide Processes
428 Involved in Volcano Dismantling From Past to Present: The Remarkable Open-Air Laboratory of the Cirque de
429 Salazie (Reunion Island). *Journal of Geophysical Research: Earth Surface*, 127(5), e2021JF006257, 2022.
- 430 Strozzi, T., Luckman, A., Murray, T., Wegmuller, U., and Werner, C.L.: Glacier motion estimation using SAR
431 offset-tracking procedures, *IEEE Transactions on Geoscience and Remote Sensing*, 40, 11, 2384 - 2391, 2002.
- 432 Tulet, P., Aunay, B., Barruol, G., Barthe, C., Belon, R., Bielli, S., and Vérèmes, H.: ReNovRisk: a multidisciplinary
433 programme to study the cyclonic risks in the South-West Indian Ocean. *Natural Hazards*, 107(2), 1191-1223, 2021.