

# Short Communication: Numerically simulated time to steady state is not a reliable measure of landscape response time

Nicole M. Gasparini<sup>1</sup>, Adam M. Forte<sup>2</sup>, and Katherine R. Barnhart<sup>3,4,5</sup>

<sup>1</sup>Tulane University, Earth and Environmental Sciences Department, New Orleans, LA, USA

<sup>2</sup>Department of Geology & Geophysics, Louisiana State University, Baton Rouge, LA, USA

<sup>3</sup>University of Colorado at Boulder, Cooperative Institute for Research in Environmental Sciences, Boulder, CO, USA

<sup>4</sup>University of Colorado at Boulder, Department of Geological Sciences, Boulder, CO, USA

<sup>5</sup>Now at U.S. Geological Survey, Geologic Hazards Science Center, Golden, CO, USA

**Correspondence:** Nicole Gasparini (ngaspari@tulane.edu)

## Abstract.

Quantifying the timescales over which landscapes evolve is critical for understanding past and future environmental change. Computational landscape evolution models are one tool among many that have been used in this pursuit. We compare numerically modeled times to reach steady state for a landscape adjusting to an increase in rock uplift rate. We use three different numerical modeling libraries and explore the impact of time step, grid type, numerical method for solving the erosion equation, and metric for quantifying time to steady state. We find that modeled time to steady state is impacted by all of these variables. Time to steady state varies inconsistently with time-step length, both within a single model and among different models. In some cases, drainage rearrangement extends the time to reach steady state, but this is not consistent in all models or grid types. The two sets of experiments operating on Voronoi grids have the most consistent times to steady state when comparing across time step and metrics. On a raster grid, if we force the drainage network to remain stable, time to steady state varies much less with computational time step. In all cases we find that many measures of modeled time to steady state are longer than that predicted by an analytical equation for bedrock river response time. Our results show that the predicted time to steady state from a numerical model is, in many cases, more reflective of drainage rearrangement and numerical artefacts than the time for an uplift wave to propagate through a fixed drainage network.

## 1 Introduction

The concepts of steady-state landscapes and characteristic timescales for landscapes to transition from one steady state to another, i.e., response times, have been widely used as a framework for interpreting landforms and landscape evolution (e.g., Whipple, 2001; Whipple and Meade, 2004; Hilley et al., 2004; Stolar et al., 2006; Whipple and Meade, 2006; Roe et al., 2008; Forzoni et al., 2014; Goren, 2016; Armitage et al., 2018), and what signals may be preserved in the sedimentary record (e.g., Allen and Densmore, 2000; Castelltort and Van Den Driessche, 2003; Simpson and Castelltort, 2012; Romans et al., 2016; Li et al., 2018; Straub et al., 2020; Tofelde et al., 2021). If landscapes evolve to a predictable steady form that is a function of environmental drivers, presumably we could invert landscape form to infer these environmental drivers (e.g., Snyder et al.,

2000; Densmore, 2004; Kirby and Whipple, 2012; Whittaker, 2012; Hurst et al., 2019; Adams et al., 2020). Further, steady-state morphology is a well-established way to compare modeled landscapes (e.g., Tucker and Bras, 1998; Tucker and Whipple, 25 2002; Gasparini et al., 2004; Anders et al., 2008; Roering, 2008; Han et al., 2015; Shobe et al., 2018; Campforts et al., 2022).

While steady state can be used to imply a variety of different conditions, here we specifically consider topographic steady state (e.g., Willett and Brandon, 2002). To determine whether a landscape has reached topographic steady state, we need to know how to measure it (either in the field or in a simulation). There are many options for how to measure topographic steady state in a computational model, and accordingly, an initial question is which steady-state metric in a numerical model 30 is most reliable. If we measure steady state using erosion rates or sediment fluxes, over what time scales should these fluxes be measured? Further, can we expect variability in sediment flux under steady conditions? If steady state is measured using landscape metrics, such as total relief, which metrics are used? Similarly, how much variability in these metrics is acceptable while still maintaining a steady state?

Once a criterion for steady state is established, a computational model can be used to measure the time it takes for a landscape 35 to reach steady state following a perturbation. Given an understanding of steady-state timescales, many different inferences may be drawn with implications for the interpretation of specific landscapes on Earth or other planets. If a particular configuration of initial and boundary conditions results in landscapes that reach steady state relatively quickly (in comparison with variations in environmental forcings), then we can expect similarly configured real landscapes to reach steady state. However, if landscapes take so long to adjust that environmental changes happen more frequently, we might expect to rarely observe steady-state 40 landscapes. Similarly, if we can establish that response times of simulated landscapes to perturbations behave systematically and predictably as a function of the environmental drivers, then simulated response times could theoretically be used to establish characteristic time scales for processes (e.g., Whipple et al., 2017; Lyons et al., 2020). Further, if time scales of landscape evolution and/or natural forcings are known in study landscapes, models could be used to test competing landscape evolution scenarios, interpret processes controlling landscape evolution, and establish the impact of competing timescales on landscape 45 form (e.g., Densmore et al., 2007; Attal et al., 2008; Godard et al., 2013; Whittaker and Boulton, 2012; Mackey et al., 2014; Brocard et al., 2016). Establishing the reliability of time to steady state derived from landscape evolution models is thus important for interpreting outcomes from these models and connecting inferences drawn from them with datasets collected on Earth.

To our knowledge, no study has comprehensively evaluated whether topographic steady state extracted from a 2D LEM 50 is a reliable measure of landscape response time. To fill this gap, we quantify steady state with different landscape evolution models that use different numerical methods and grid types. In all of our model scenarios we evaluate four different metrics for quantifying steady state. We show that flow routing methodology has a large control on time to steady state in our modeling experiments, but that the impact of flow routing on drainage reorganization also varies with grid type. Similarly, computational time step and method for quantifying steady state also impact the time to steady state. In other words, we find time to steady 55 state from numerical models to be inconsistent, and, in some cases, of minimal use when interpreting real landscapes, especially when considering the outcome of a single or very small set of landscape simulations.

## 2 Motivation

Determining when a landscape evolution model has reached steady state seems like a simple task, yet landscape evolution modelers are not consistent in their practice. To identify some of the different criteria used to determine when steady state is reached, we surveyed 30 different publications that apply the concept of steady state using a numerical model (Howard, 1994; Fernandes and Dietrich, 1997; Tucker and Bras, 1998; Roering et al., 2001; Stark and Stark, 2001; Istanbuluoglu and Bras, 2005; Gasparini et al., 2007; Stolar et al., 2007; Anders et al., 2008; Attal et al., 2008; Davy and Lague, 2009; Armitage et al., 2011; Perron and Fagherazzi, 2012; Refice et al., 2012; Braun and Willett, 2013; Goren et al., 2014; Han et al., 2015; Croissant and Braun, 2014; Carretier et al., 2016; Shelef and Hilley, 2016; Zhang et al., 2016; Campforts et al., 2017; Kwang and Parker, 2017; Shobe et al., 2017; Whipple et al., 2017; Li et al., 2018; Theodoratos et al., 2018; O'Hara et al., 2019; Salles, 2019; Steer, 2021). These publications span three decades. The list has 30 unique first authors, although some first authors are later authors in other papers on the list. We recognize that this is not an exhaustive list, but we think these 30 papers generally illustrate what we have informally observed throughout our modeling careers.

It is not our intention to criticize any papers. Accordingly, we do not describe practices of a single study. We were as generous as we could be with our interpretation of what criteria were used to determine steady state. For example, if the criteria was not described in the text, but could be implied from a plot, we interpreted that study as having a criteria.

20 of these 30 papers stated that steady state is reached when rock uplift and erosion rates are equal, or equivalently the sediment flux rate is equal to the product of the average upstream rock uplift rate and the drainage area. In other words, steady state is reached when the change in elevation is zero. Of these 20 papers, three papers state that they used a defined threshold other than zero. Four of the 30 papers assumed steady state is reached when the mean elevation is unchanging, and none of these provided a threshold to determine when unchanging is reached. Two of the papers used unchanging sediment flux through time to indicate steady state, and they did not state a threshold. Four of the papers did not state the criteria used to determine that steady state is reached. None of these papers provided enough information to recreate the criteria. For example, papers that do not use an averaged criteria do not state where measurements are made: Does every point on the landscape have an erosion rate that matches the rock uplift rate? Or is the average erosion rate equal to the average rock uplift rate?

Based on these observations, we are motivated to test whether or not the metric and the threshold matter when calculating time to steady state.

## 3 Modeling environments

The three modeling environments used in this paper were chosen because the authors have experience using them. The choice of these models says nothing about the value of these modeling environments or the value and variety of other modeling environments. We do not assume that these models represent the behavior of all modeling environments. That said, these three modeling environments allow us to explore the sensitivity of time to steady state to multiple grid types and numerical methods.

### 3.1 TTLEM

TTLEM is part of the TopoToolbox Matlab library. Many readers may be familiar with the DEM (digital elevation model) analysis tools that are contained within TopoToolbox (e.g., Schwanghart and Scherler, 2014). TTLEM is an LEM that is distributed with these tools and uses the TopoToolbox library for many of the core functions within the LEM, e.g., flow routing (Campforts et al., 2017) (Available at <https://github.com/wschwaghart/topotoolbox>; accessed December 7, 2022).

TTLEM contains three numerical algorithms for solving the stream power equation on a raster grid. In this study we use TTLEM computer models that implement the FastScape implicit numerical algorithm, an explicit finite difference algorithm, and the total variation diminishing finite volume method (TVD\_FVM). The FastScape numerical algorithm was designed to be more stable than most finite difference methods (Braun and Willett, 2013). TVD\_FVM is designed to be highly accurate and limit numerical diffusion (Campforts and Govers, 2015).

### 3.2 Landlab

Landlab is Python library for modeling surface processes on regular and irregular grids (Hobley et al., 2017; Barnhart et al., 2020). In this study we implement computer models that use raster, hexagonal, and Voronoi grids. (Landlab also supports radial grids but these are not tested in this study.) Landlab is open source and available through GitHub (<https://github.com/landlab/landlab>; accessed October 14, 2022). This study used Landlab version 2.4.2.dev0. Landlab is in active development and is currently maintained through CSDMS (Tucker et al., 2022). The stream power process component used in all Landlab computer models in this study implements a version of the FastScape implicit finite difference numerical algorithm (Braun and Willett, 2013).

### 3.3 CHILD

The CHILD modelling environment was developed in the late 1990s (e.g., Tucker et al., 1999, 2001a, b). It operates on a triangular irregular network, forming a Voronoi diagram, here referred to as a Voronoi grid for consistency with the other grid types. CHILD uses an explicit finite difference solution of the stream power process equation.

CHILD is a C++ code that is open source and available through GitHub (<https://github.com/childmodel/child>; accessed 08 September 2022). Although CHIL is no longer actively in development, it was widely used in the past 20 years and continues to be used at the time of writing. Because of its familiarity to the authors, its application on a Voronoi grid, and its advanced stage of development, we used it in this study.

### 3.4 LEMs and comparison rational

Using the three modeling environments described above, we created seven different LEMs which we use to calculate time to steady state. These different LEMs are described in Table 1. These three modeling environments allow us to compare how grid type and the numerical method for solving the stream power equation impact time to steady state.

LEM	Modeling Environment	Grid Type	Numerical Method
TRI	TTLEM	raster	implicit (Fastscape)
TRE	TTLEM	raster	explicit
TRT	TTLEM	raster	TVD_FVM
LRI	Landlab	raster	implicit (Fastscape)
LHI	Landlab	hexagonal	implicit (Fastscape)
LVI	Landlab	Voronoi	implicit (Fastscape)
CVE	CHILD	Voronoi	explicit

**Table 1.** Table of different LEMs used in this study. We use the LEM abbreviated names in column 1 to refer to the different model scenarios. The first letter in the abbreviated name stands for the modeling environment: T for TTLEM; L for Landlab; and C for CHILD. The second letter stands for the grid type: R for raster; H for hexagonal; and V for Voronoi. The third letter stands for the numerical method used to solve the stream power equation: I for implicit; E for explicit; and T for TVD\_FVM.

#### 4 Stream power equation

All of the model environments we consider use the stream power equation to represent the evolution of fluvial profiles. We only consider fluvial erosion in our LEMs. Erosion is sustained throughout all simulations by uniform, steady rock uplift. The equation controlling the change in topographic elevation at each node is,

$$\frac{dz}{dt} = U - K A^m S^n \quad (1)$$

where  $z$  is node elevation;  $t$  is time, and  $dt$  is the computational time step;  $U$  is the rock uplift rate;  $K$  is the erodibility parameter;  $A$  is the drainage area at a node;  $S$  is the topographic slope (negative of the spatial derivative in elevation, assuming directionality is in the downslope direction) at a node; and  $m$  and  $n$  are positive exponents. Note that the second set of terms on the right-hand-side of equation 1 is the widely used stream power equation (SPE) that describes detachment limited fluvial incision,

$$E = K A^m S^n \quad (2)$$

where  $E$  is fluvial incision. Derivations, dynamics, and limitations of the SPE have been described in detail in numerous publications and we refer interested readers to such sources (e.g., Howard, 1994; Whipple and Tucker, 1999; Lague, 2014).

#### 5 Experimental set-up

Each of our numerical experiments quantified the time it takes for a low rock uplift rate, steady-state landscape to fully adjust to an increase in rock uplift rate using a specific LEM scenario (Table 1), initial condition, and a range of computational time step lengths. We did not formally quantify that the initial low uplift landscapes were at steady state. Instead we generated initial

conditions with simulations that ran for 100 million years. As will be apparent from our results, this is more than enough time  
135 for our landscapes to reach steady state regardless of chosen metric or threshold for identifying steady state. In some cases  
we stopped the initial runs before 100 million years because the landscape became perfectly static. This experimental design,  
in which an initially steady landscape is perturbed by changing the uplift rate, is similar to previous modeling studies (e.g.,  
Rosenbloom and Anderson, 1994; Whipple and Tucker, 1999, 2002; Gasparini et al., 2007; Attal et al., 2011), which is why  
we chose it.

140 As described below, we kept as much constant among the simulations with different LEMs as possible. However, we did not  
do anything to change the models from "off the shelf". In other words, we used the modeling environments without changing  
any of the internal code that implements the numerical algorithms. Where appropriate, we did change parameters within the  
different modelling environments to try to assure that their behavior was as comparable as possible. For example, all the raster  
models use D8 flow routing (Tarboton, 1997), and this was an option that we chose when using the LRI model to make it  
145 more similar to the TRI model. In contrast, there are multiple ways to calculate a topographic gradient at a grid cell in a  
computational model. Choosing the algorithm used to make this calculation is not exposed to the user for these models, and  
accordingly we can not ensure that each model calculates topographic gradient in the same way.

The simulations that created the initial steady state landscape were started from a surface with elevation values randomly  
chosen between 0.0 and 1.0 meters. The random elevation initial surface was used because it creates more realistic looking  
150 drainage networks. The raster grids had 200 by 200 nodes, and the spacing between nodes in the x and y direction was 100  
meters. All the simulations using a raster grid in different models used the same exact initial topographic surface (LRI, TRI,  
TRT, and TRE). The numerical experiments that use a Voronoi grid are created from a Delaunay triangulation of staggered  
rows of nodes spaced 100 m apart in the x direction. The initial condition was a similar noisy surface as used with the raster  
grids, and the same exact initial surface was used in the CVE and LVI simulations. Regardless of the type of grid, all the grids  
155 were  $\approx 20$  km by  $\approx 20$  km with  $\approx 100$  m resolution.

The boundary conditions used in all simulations were the same. All of the nodes on the perimeter of grid were open bound-  
aries where water can exit, but not enter, the grid. The elevation of the perimeter boundary nodes was fixed at zero meters  
and did not change during the simulations. In other words, the perimeter nodes were not uplifted but the rest of the grid was  
uplifted.  $U$  and  $K$  were spatially uniform and set at  $10^{-4}$  m/yr and  $5 \times 10^{-6}$  yr $^{-1}$ , respectively, in all the initial simulations.  $m$   
160 and  $n$  were also spatially uniform and set at 0.5 and 1, respectively.

We explored how the time step value,  $dt$  in equation 1, impacts the time to steady state. Each model should be stable, and  
produce the correct analytical solution, when the time step satisfies the Courant–Friedrichs–Lewy condition:

$$C_{max} > v \frac{dt}{dx} \quad (3)$$

where  $C_{max}$  is the Courant number,  $\approx 1.0$  in stable conditions;  $v$  is the speed which an erosional wave will move through the  
165 network, and  $dx$  is the spacing between nodes. When using the stream power process equation with  $n = 1$ ,  $v$  is approximated  
as

$$v \approx KA^m. \quad (4)$$

To calculate the maximum time step for a stable Courant condition ( $dt$ , equation 3), we needed to know the largest drainage area in the modeled network to estimate the fastest wave speed (equation 4). We estimated the size of the largest drainage to be one-fourth of the total area of the grid, or  $49 \text{ km}^2$ . This value was intended as an overestimation, ensuring that we calculated a stable time step with Eqs. 3 and 4. For the values chosen for  $K$  and  $m$ ,  $C_{max} = 1$ , and our estimated value for the maximum drainage area, we calculated a stable  $dt$  of 2857 years. We then chose  $dt = 2,500$  yrs as the base-case model time step because it should result in stable simulations. We explored how time to steady state changed by changing  $dt$ . We ran four simulations with each model, reducing  $dt$  to 250 yrs and increasing  $dt$  to 25,000 and 100,000 yrs, or approximately 10 and 40 times greater than the stable condition, respectively.

The decision to use time steps longer than the estimated stable time step is motivated by the results shown by Braun and Willett (2013). They state that their numerical algorithm, which is the implicit numerical method used in TRI and all Landlab models, is accurate even when the time step is more than 100 times the stable condition. The stability of the algorithm is also discussed in (Braun and Deal, 2023). However, simulations from models employing either the explicit finite difference or TVD\_FVM algorithms did not produce accurate, or even sensible results, with time steps longer than the predicated stable value. Hence results with all time steps are only shown from models using the implicit solution.

We use the steady initial conditions (elevation unchanging everywhere through time) produced from each model simulation and time step combination as the initial condition for the corresponding transient simulations. We increase rock uplift rate uniformly across the grid by a factor of five, to  $U = 5 \times 10^{-4} \text{ m/yr}$ . As the landscape evolves in response to the new, higher uplift rate, we track the steady-state metrics to quantify differences in time to steady state.

In all of our initial simulations we re-calculated flow directionality at every time step. However, after running the simulations we observed that in some cases the drainage network rearranged, and we wanted to explore how this affects time to steady state. Thus, we performed two more numerical experiments using TTLEM with the three different numerical methods (TRI, TRE, TRT). First we re-ran all of the TTLEM numerical models but did not reroute flow at every time step during the transient simulations. In other words, we forced the network to remain static during the adjustment to a higher uplift rate. This is an available option within the TTLEM modeling environment that is controlled in the input file. Second, we generated new steady-state initial conditions and used them for another set of uplift increase experiments. For these simulations, we started with a different initial white noise grid to create the low uplift steady state topography. Because the initial white noise determines the network details, these landscapes have a different network despite being run with the same model, parameters, and boundary conditions.

## 6 Time to steady state

Here we describe the metrics we use to empirically quantify time to steady state. We also describe the analytical equation previously presented by Whipple and Tucker (1999) and Whipple (2001) that we use to predict the time for a rock uplift signal to propagate through a detachment-limited river network. In the results section we will compare the empirically derived steady-state times with the analytically predicted values.

## 6.1 Numerically modeled

Theoretically steady state is reached when equation 1 is equal to zero, or when rock uplift rate  $U$  and fluvial incision rate  $E$  are equal at every node. Although steady state is often used and referred to in numerical modeling studies, the criteria for reaching steady state, or determining when  $E = U$  everywhere on the grid, is not always explicitly described. Here we test four metrics  
 205 for determining when steady state is reached. We refer to these collectively as the steady-state metrics.

The temporal change in maximum elevation,  $\Delta z_{max}^t$  was calculated as,

$$\Delta z_{max}^t = |max(z_i^t) - max(z_i^{t-100,000})|, \quad (5)$$

where  $max(z_i^t)$  is the maximum grid elevation within the domain at time  $t$ ;  $i$  is the node index; and  $max(z_i^{t-100,000})$  is the maximum grid elevation within the domain at time  $t - 100,000$ .

210 The temporal change in mean elevation,  $\Delta z_{mean}^t$  was calculated as,

$$\Delta z_{mean}^t = |mean(z_i^t) - mean(z_i^{t-100,000})|, \quad (6)$$

where  $mean(z_i^t)$  is the mean grid elevation within the domain at time  $t$ ; and  $mean(z_i^{t-100,000})$  is the mean grid elevation within the domain at time  $t - 100,000$ .

The maximum temporal change in elevation,  $\Delta z_{max(loc)}^t$  was calculated as,

$$215 \Delta z_{max(loc)}^t = max(|z_i^t - z_i^{t-100,000}|). \quad (7)$$

The difference between equations 5 and 7 is that the former finds the difference between the maximum elevation of the entire domain at two different times, whereas the latter finds the difference in elevation at every node in the landscape between two different time steps and uses the maximum of those differences. The units on all of the elevation change metrics are meters.

Finally, the temporal change in sediment flux,  $\Delta Q_s^t$ , was calculated as,

$$220 \Delta Q_s^t = \sum Q_{s_i}^t - \sum Q_{s_i}^{t-100,000}, \quad (8)$$

where  $\sum Q_{s_i}^t$  is the summation of the erosion rate at every node on the landscape at time  $t$ ; and  $\sum Q_{s_i}^{t-100,000}$  is the summation of the erosion rate at every node on the landscape at time  $t - 100,000$ . Here sediment flux refers to the flux of all material eroded from the bed. The models do not track the flux of sediment load explicitly when using the SPE, which is why we use the local erosion rate as a proxy for sediment flux. In all of the grids the cell size is nearly uniform, hence the summation of erosion rate  
 225 is a good proxy for the sediment flux. The units of  $\Delta Q_s$  are meters per year.

In all cases the steady-state metrics are calculated over a temporal difference of 100,000 yrs, which was set by the longest time step of the simulations being compared. This was done to ensure equivalent comparisons between the simulations as some degree of differences in time to steady state would be expected if we calculated these metrics over different time intervals between simulations. The first time that the topographic metrics were calculated is at 100,000 yrs into the simulation. With  
 230 the sediment flux metric, the first calculation is done at 200,000 yrs, because there is no sediment flux at time zero in the simulation.



As a landscape evolves towards steady state, all of the steady-state metrics should approach zero. When exactly a new steady state is reached could be defined as when the metric value passes below a predetermined threshold. The strictest definition would be when a metric reaches zero. We note that differences in the accuracy of calculations in different modeling environments could lead to some of the metrics never reaching zero. Also, the time at which a particular metric appears to reach zero will depend on the floating point precision of the programming environment in which the metric is calculated. One could also use the rate of change in the value of a steady-state metric as a criteria for reaching steady state.

We do not state what method should be used to determine when steady state is reached. We present the results using different threshold values. We also present the time series of the different metrics, so the reader can decide whether a change in the rate of change of a metric over time is a reasonable method for determining steady state.

## 6.2 Analytical equation

Following Whipple and Tucker (1999), Whipple (2001) showed that the predicted response time to an increase in rock uplift in a river network evolving according to equation 1 and with  $n = 1$  is

$$T_A = \frac{\beta}{K} \quad (9)$$

where

$$\beta = k_a^{-\frac{m}{n}} \left(1 - \frac{hm}{n}\right)^{-1} \left(L^{1-\frac{hm}{n}} - x_c^{1-\frac{hm}{n}}\right). \quad (10)$$

In equation 9,  $T_A$  is the analytical time to steady state;  $K$  is the erodibility in equation 2; and  $L$  is the length of the longest channel in the network. In equation 10,  $x_c$  is hillslope length, and  $m$  and  $n$  are the exponents in equation 2. Equation 10 also requires empirical parameters  $k_a$  and  $h$  from the equation developed by Hack (1957):

$$A = k_a (x_d)^h \quad (11)$$

where  $x_d$  is distance from the divide and  $A$  is drainage area. Note that equation 10 only holds when  $\frac{hm}{n} \neq 1$  which is the case in all of our experiments.

We use data from the largest watershed in the modeled landscapes to calculate  $k_a$  and  $h$ . In simulations in which there is drainage rearrangement, and hence slight changes in these parameters while the simulation approaches a steady state, we use values calculated from the network at the end of the simulation time, which was 50 million years for the majority of our simulations. As none of our simulations formally included hillslopes, i.e., we do not consider diffusion and the diffusion constant was set to 0 in our simulations, we set  $x_c$  in equation 10 to 0.

We note that equation 9 is the time for the signal from an increase in rock uplift to move through a river network. It does not include the response time of hillslopes. However, our numerical simulations do not include hillslopes, so this equation should approximate the time to steady state in our experiments.

## 7 Time to steady state results


The time series of the different metric values for the TRI experiments with different time steps are shown in figure 1. For a given metric, the time series for the different time step values (different colored lines) have similar patterns. For example, the zoomed in view (left column) of the change in maximum elevation (top row) remains constant initially, as the value is  
265 controlled by the change in rock uplift rate until the erosional wave has propagated upstream. Once the erosional wave reaches the uppermost parts of the network, the value begins to generally decline, but not monotonically. When looking at the zoomed out view (right column), the change in maximum elevation appears to bounce around in a contained range of values, until taking a sharp decline with time. If a perfect steady state is reached, this metric (and all the metrics) would go to zero, within the computational accuracy of the model. The time at which the sharp decline occurs varies by  $\approx 40$  My for the change in  
270 maximum elevation metric, and the time of the sharp decline does not change systematically with time step value.

The time series of the different metric values for the LRI experiments with different time steps are shown in figure 2. Although the patterns for a given metric are similar to those observed in figure 1, there are some differences. For example, in the TRI experiments (figure 1), the time to reach steady state predicted using the longest channel in each landscape (squares) seems to roughly match an inflection (here meaning change in slope) in the time series of the change in mean elevation metric.  
275 When comparing with the change in mean elevation metric in the LRI experiments (figure 2), the general pattern of the time series are similar. However, the predicted time to steady state using the longest channel in the LRI experiments does not consistently match the inflection in the time series of the change in mean elevation metric.

Time series of all our metrics in all of our numerical experiments with continual flow routing are illustrated in figure 3. Each column of figure 3 shows the time series of one of the four steady-state metrics. We recognize that these plots are difficult to  
280 see at this zoomed out scale. However, it is possible to see that the results in figures 1 and 2 illustrate behavior that is similar to all of the models.

One way to determine the time to steady state would be to set a threshold value that a metric must decline below to reach steady state. We calculated the time to steady state using the different metrics with a range of threshold values for the TRI numerical simulations (figure 4). When the threshold value is relatively large, the metric values often increase and decrease  
285 around the value. In those cases, we used the first time that the metric crossed below the threshold value, as that would likely be the method in a numerical model. (In other words, a model may run until the metric threshold value is reached.) However, it is worth noting that given the variability that persists in the metric values for extended periods (figure 3), and depending on the choice of threshold, the apparent time to steady state can vary significantly if instead you consider the last time that a given metric value is above the threshold value.


290 The change in maximum elevation, mean elevation, and sediment flux all have threshold values that provide times to steady state that generally agree with the analytical response time, regardless of the time step. The threshold value should be relatively large (considering the range we used) but not too large. When using the maximum change in local elevation, none of the illustrated threshold values are a good match to the analytical prediction. Of course we could have found a threshold value of maximum change in local elevation that predicted times to steady state that roughly match the analytical solution, but that is

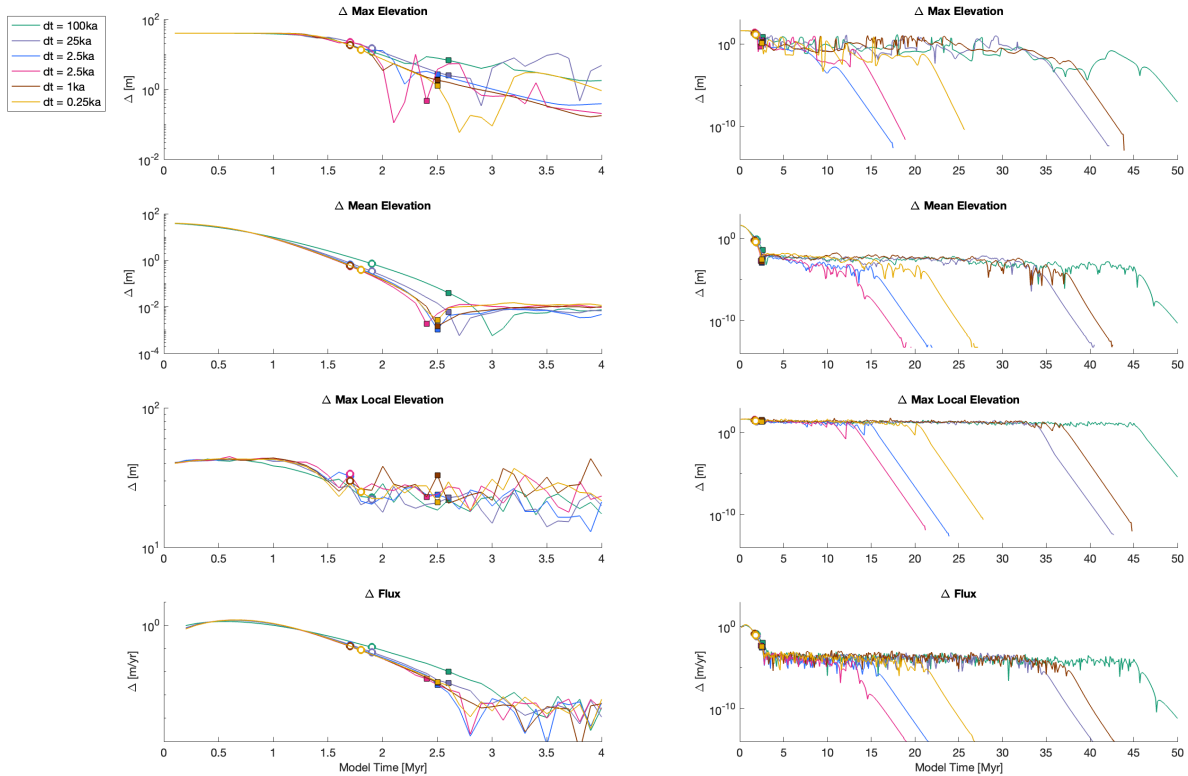

**Figure 1.** Time series from the TRI experiments of the four different steady-state metrics, each in a different row. The two columns show the same data, but the left column is zoomed in on only the first 4 million years of the time series. The different colors represent the different time step values; the circles are the analytical response time calculated using the average channel length in equation 9; the squares are the analytical response time calculated using the longest channel length in equation 9.

295 not the point of our study. Further, it would be impossible to know what threshold matches the analytical prediction before doing the modeling experiments.

Before doing the computational experiments, we had hypothesized that the empirical steady state would vary monotonically with time step, in part because this is implied by results of Braun and Willett (2013), e.g., their figure 4, exploring the dynamics of the implicit solution to the stream power equation. However, our experiments illustrate a lack of relationship between  
 300 empirical steady state and time step. This is illustrated in figure 4. For any given threshold value, the smallest estimated time to steady state (y axis) is not necessarily produced using the smallest time step, and the longest time to steady state is not necessarily produced using the longest time step.

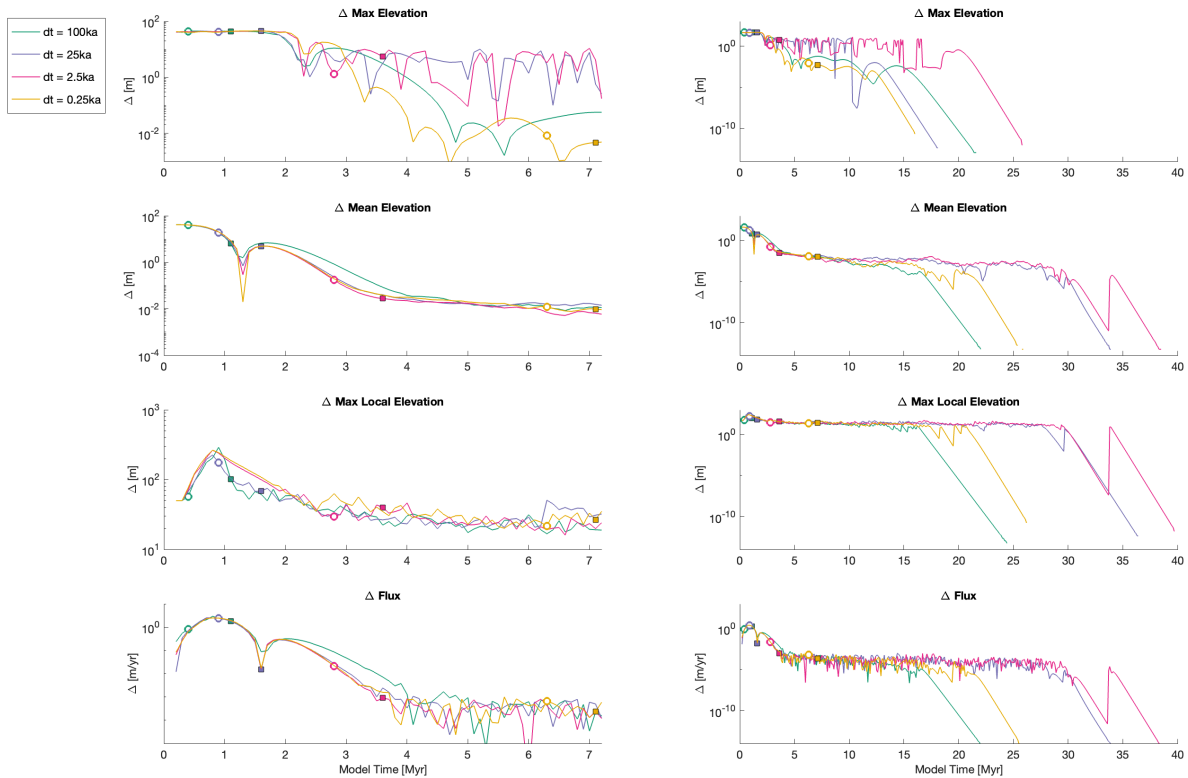


**Figure 2.** Time series from the LRI experiments of the four different steady-state metrics. Refer to the caption in figure 1 for details.


We wanted to rule out that this lack of relationship was not because of an initial landscape and network that, just by chance, led to odd results. Thus, we reran all of the TTLEM simulations on different steady-state landscapes that were produced using the same process as the first set of simulations, just with a different initial random surface. In these alternative TTLEM simulations, there is again no relationship between time to steady state and time step. (Results are not shown, although two results using the time step 2,500 yrs are shown in figures 1 and 4. One of these results is from the alternative initial condition.)

When comparing the evolving topographies, we observed that the CVE simulations have no drainage rearrangement, despite rerouting flow at every time step. The LVI simulations have some drainage rearrangement but very little and only in the headwaters. In contrast, in some of the TTLEM simulations, we observed that the network across the entire landscape changed, though generally in subtle ways. Thus, we hypothesized that drainage rearrangement was playing a part in the variation in times to steady state.

To test this hypothesis, we reran the initial set of TTLEM simulations, but this time we did not reroute the flow after every time step during the transient simulations (figure 5). What we found is that there is much less variation among the time series

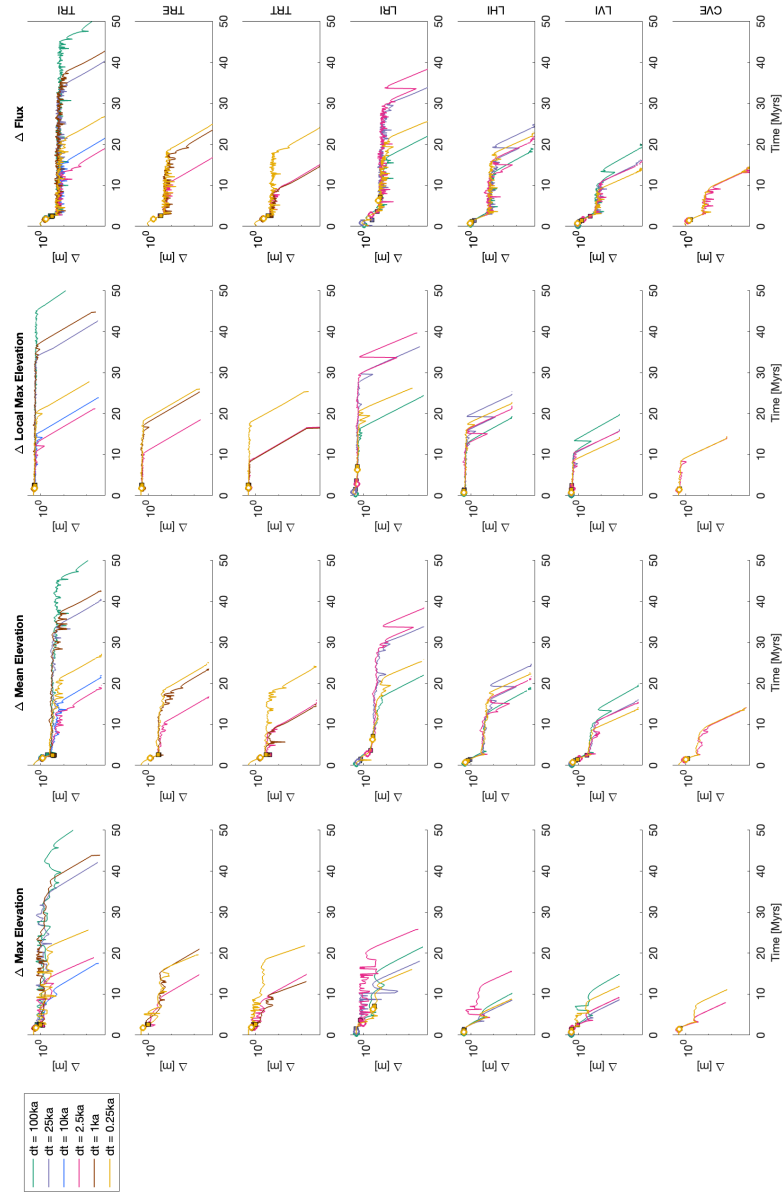

**Figure 3.** Time series of four different steady-state metrics, in columns. Each row has the results from a different LEM (Table 1). The x axis is time in millions of years in all the plots. Note that the extent of the x and y axes is the same in all the subplots. Circles and squares are used to show the different analytical times to steady state (see caption of figure 1); however, they are difficult to see at this scale.

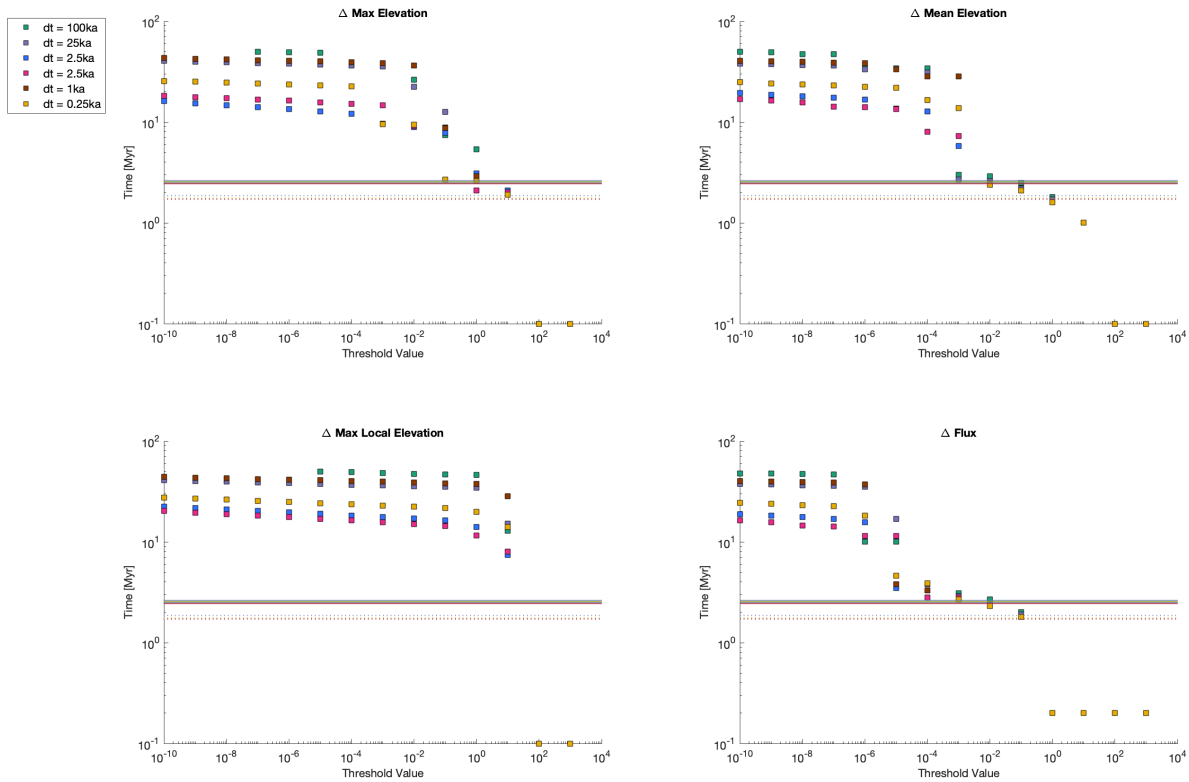


**Figure 4.** Plots of the time to steady state from the TRI numerical experiments (y axes) resulting from different metric threshold values (x axes). The dashed horizontal lines illustrate the analytical time to steady state using the average channel length. The solid horizontal lines illustrate the analytical time to steady state using the longest channel length.

315 with different time steps when comparing with the initial set of simulations with continual calculation of flow routing. The time series of all the steady-state metrics in the simulations without drainage rearrangement are different from the TTLEM simulations with drainage rearrangement. With a fixed network, all of the metrics remain nearly steady in the initial response, and then they monotonically decline.

## 8 Implications and Conclusions

320 At a minimum, the results of our experiments highlight that when simulating landscape evolution scenarios and considering topographic steady state—and especially time to steady state—it is critical to both report the metric being used and the threshold value for that metric to assess steady state. Based on figure 4 the change in mean elevation and sediment flux appear to have

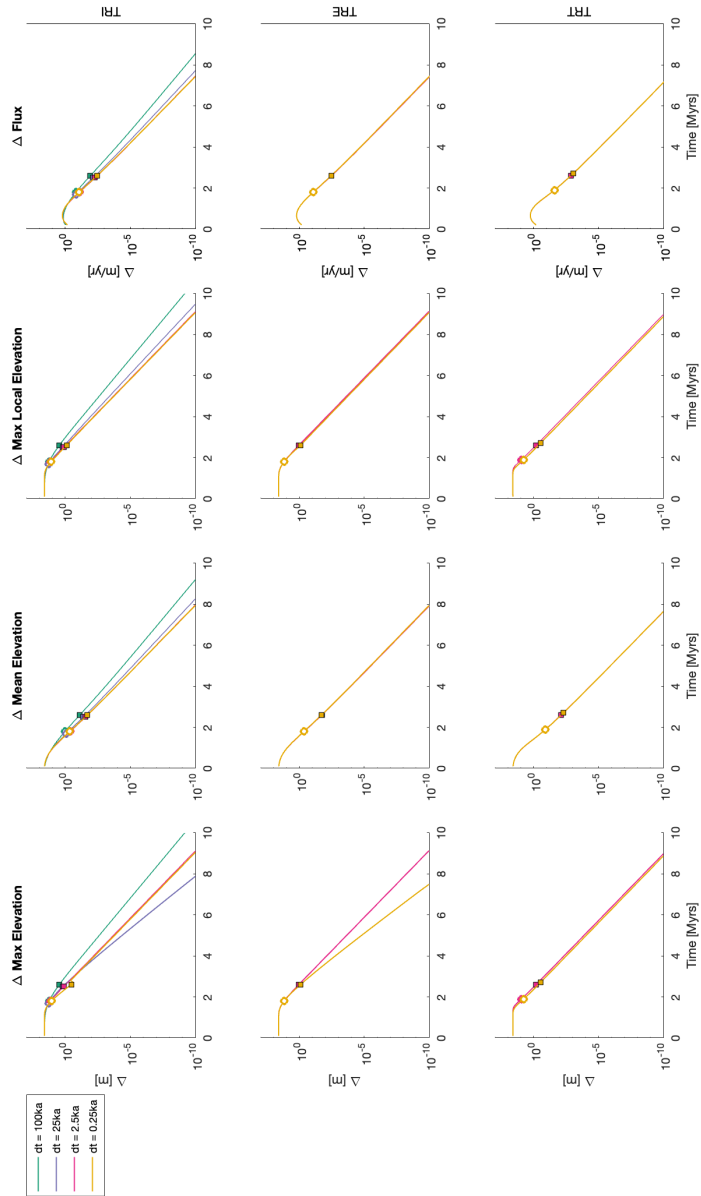

**Figure 5.** This figure is similar to figure 3 except we only show TTLEM model results without rerouting the flow after every time step. In other words, there was no drainage rearrangement in these simulations. The extent of the x and y axes in all of the time series is the same.

a range of threshold values that give results that reasonably correspond to the response time predicted from the analytical solution. However, these threshold values are not necessarily the same threshold values that should be used with other modeling environments for the same metric.

Comparing our experiments where flow routing is recomputed at every time step (figure 3) with those where the drainage network is fixed (figure 5) suggests that small perturbations in drainage network structure over time (e.g., single pixel to pixel changes in divide location or along the course of individual drainages) likely cause the longer time to steady state compared to the analytical predictions. Recent work highlighting that divide migration and drainage network instability may be more the norm (e.g. Willett et al., 2014; Whipple et al., 2017; Beeson et al., 2017; Forte and Whipple, 2018; Val et al., 2022), complicates the assumption of a static drainage network implied by calculations of the analytical response time. In fact, the analytical response time predicts only the time for an erosional signal to propagate through a fixed network (Whipple, 2001). Any adjustment in river network topology is not considered in the calculation, nor is hillslope adjustment time. Although predictions from equation 9 have been used synonymously with time to steady state, they are not the same thing. The analytical response time might be better captured in a 2D numerical model as the time that the last channel reach on the landscape starts responding to an erosional wave.

Any drainage network rearrangement in the modeling results presented above comes solely from the flow routing algorithm and numerical artifacts. Our modeling scenarios did not consider any processes or driving conditions that might physically lead to drainage rearrangement, such as landslides (e.g. Campforts et al., 2022) or lateral channel migration (e.g. Kwang et al., 2021). The majority of prior results arguing for pervasive drainage network reorganization consider scenarios with spatial gradients in either  $K$  or  $U$ , which our simple experiments do not include. It is possible that time to steady state from 2D simulations driven by spatial gradients in environmental drivers and which generally induce greater amounts of network reorganization, like those considered for divide migration by Whipple et al. (2017) or Lyons et al. (2020), may be less sensitive to the initial conditions and small perturbations in the network than our simulations here. However, testing this is beyond the scope of this short communication.

In summary, if we are primarily concerned with the legitimacy of using results of landscape simulations to establish the time scale of processes or the evolution of specific landscapes, it is not immediately apparent that time to steady state estimated from 2D numerical simulations is any more or less grounded in reality than the analytical solution. However the variability of modeled time to steady state based on metric and threshold illustrates the importance of stating all model conditions and how they were determined. Based on our experiments, we provide a set of recommendations for considering steady state and response times from 2D simulations. First and foremost, it is critical to remain mindful of the importance of the initial conditions (e.g., the random noise grid, or estimates of paleotopography) in dictating landscape evolution (e.g., Willgoose et al., 1991; Perron and Fagherazzi, 2012; Ferrier et al., 2013; Han et al., 2014; Ward and Galewsky, 2014; Kwang and Parker, 2019) and to treat properties related to response times as more stochastic. Thus, one potentially useful approach is to consider the analytical response time as a minimum response time, as was suggested by Whipple (2001). Ranges of more reasonable response times, incorporating some stochastic degree of minor drainage reorganization, can be estimated from multiple 2D simulations with different initial topographic conditions (i.e., random noise) for a given fixed set of other environmental factors. However,



one should be mindful of whether drainage rearrangement is a numerical artifact or driven by processes and environmental variability that might lead to network rearrangement. Also, our results highlight that choice of grid is meaningful in terms of reliability of modeled time to steady state, with either Voronoi or hex grids more likely to produce estimates that do not vary as much as a function of  $dt$ . Thus these grid types may be more suitable where reliability of response times is important or where simulations run with different  $dt$  might be compared.

Generalized modeling studies that use synthetic landscapes, as we do here, are extremely valuable tools in the geomorphic community. Our study says nothing about using 2D numerical models for interpreting landscape forms, either during the transient response or at quasi steady state, or as a function of non-dimensional time within a simulation. The absolute most conservative reaction to our results would be to ignore response times as derived from 2D landscape evolution models. However, we advocate for a more nuanced approach. We suggest that care be taken to ensure the measurement fits the question. The time it takes for a knickpoint to propagate through a network is not necessarily the time it takes for a numerical model to reach a pure steady state, and these two things should not be conflated.

We stress that none of our results are based on observed natural watersheds or landforms that have data informing local rates and processes. For example, numerical models can be used to interpret the time for a knickpoint to propagate through a river network, as long as we have calibrated parameters and use the observed network pattern. Our results illustrate that the details of a river network matter, thus results from one river network do not necessarily apply to another river network. Further, numerical artefacts should not be interpreted as real model behavior. Finally, how something is measured matters, and clarifying how measurements are made in landscape evolution modeling studies should be general best practice.

*Code and data availability.* CHILD is distributed from this repository: <https://github.com/childmodel/child>; accessed 1 May 2023. Landlab is distributed from this repository: <https://github.com/landlab/landlab>; accessed 1 May 2023. TTLEM is distributed from this repository: <https://github.com/wschwangerhart/topotoolbox>; accessed 1 May 2023. The initial grids, input files, and code for creating the figures for this manuscript are available from this repository: [https://github.com/nicgaspar/LEM\\_comparison](https://github.com/nicgaspar/LEM_comparison).

*Author contributions.* NG initiated this study and ran all the CHILD simulations. KB ran all the Landlab simulations. AF ran all the TTLEM simulations and made figures for the manuscript. NG wrote the first draft of the manuscript. All authors contributed to the design and direction of the study, interpreting the results, and refining the manuscript.

*Competing interests.* The authors have no competing interests to declare.

*Acknowledgements.* We gratefully acknowledge funding from the Tulane Oliver Fund, NSF Awards OAC-1450338 (NMG), EAR-1349375 (NMG), and EAR-1725774 (KRB). We are grateful for thoughtful feedback from at least two anonymous reviewers and Andy Wickert, as

well as the patience of AE Wolfgang Schwanghart. We acknowledge contributions from Nathan Lyons in the initial stages of this project. Conversations with Kelin Whipple, Brian Yanites, and Leif Karlstrom encouraged us to pursue this work. CSDMS enabled this modeling study. We also acknowledge the impact of the global COVID-19 pandemic on this study. The first draft of this manuscript was written in January 2020, but the work was put aside for two years due to NMG being overwhelmed by the excess work and family burdens created during a pandemic.

## References

- Adams, B. A., Whipple, K. X., Forte, A. M., Heimsath, A. M., and Hodges, K. V.: Climate controls on erosion in tectonically active landscapes, *Science Advances*, 6, <https://doi.org/10.1126/sciadv.aaz3166>, 2020.
- Allen, P. A. and Densmore, A.: Sediment flux from an uplifting fault block, *Basin Research*, 12, 367–380, 2000.
- 395 Anders, A. M., Roe, G. H., Montgomery, D. R., and Hallet, B.: Influence of precipitation phase on the form of mountain ranges, *Geology*, 36, 479, <https://doi.org/10.1130/G24821A.1>, 2008.
- Armitage, J. J., Duller, R. A., Whittaker, A. C., and Allen, P. A.: Transformation of tectonic and climatic signals from source to sedimentary archive, *Nature Geoscience*, 4, 231–235, 2011.
- Armitage, J. J., Whittaker, A. C., Zakari, M., and Campforts, B.: Numerical modelling of landscape and sediment flux response to precipitation rate change, *Earth Surface Dynamics*, 6, 77–99, 2018.
- 400 Attal, M., Tucker, G., Whittaker, A. C., Cowie, P., and Roberts, G. P.: Modeling fluvial incision and transient landscape evolution: Influence of dynamic channel adjustment, *Journal of Geophysical Research: Earth Surface*, 113, 2008.
- Attal, M., Cowie, P. A., Whittaker, A. C., Hobbey, D., Tucker, G. E., and Roberts, G. P.: Testing fluvial erosion models using the transient response of bedrock rivers to tectonic forcing in the Apennines, Italy, *Journal of Geophysical Research: Earth Surface*, 116, <https://doi.org/10.1029/2010JF001875>, \_eprint: <https://onlinelibrary.wiley.com/doi/pdf/10.1029/2010JF001875>, 2011.
- 405 Barnhart, K. R., Hutton, E. W. H., Tucker, G. E., Gasparini, N. M., Istanbuluoglu, E., Hobbey, D. E. J., Lyons, N. J., Mouchene, M., Nudurupati, S. S., Adams, J. M., and Bandaragoda, C.: Short communication: Landlab v2.0: a software package for Earth surface dynamics, *Earth Surface Dynamics*, 8, 379–397, <https://doi.org/10.5194/esurf-8-379-2020>, 2020.
- Beeson, H. W., McCoy, S. W., and Keen-Zebert, A.: Geometric disequilibrium of river basins produces long-lived transient landscapes, *Earth and Planetary Science Letters*, 475, 34–43, 2017.
- 410 Braun, J. and Deal, E.: Implicit algorithm for threshold Stream Power Incision Model, *Journal of Geophysical Research: Earth Surface*, p. e2023JF007140, 2023.
- Braun, J. and Willett, S. D.: A very efficient  $O(n)$ , implicit and parallel method to solve the stream power equation governing fluvial incision and landscape evolution, *Geomorphology*, 180–181, 170–179, <https://doi.org/10.1016/j.geomorph.2012.10.008>, 2013.
- 415 Brocard, G. Y., Willenbring, J. K., Miller, T. E., and Scatena, F. N.: Relict landscape resistance to dissection by upstream migrating knickpoints, *Journal of Geophysical Research: Earth Surface*, 121, 1182–1203, 2016.
- Campforts, B. and Govers, G.: Keeping the edge: A numerical method that avoids knickpoint smearing when solving the stream power law, *Journal of Geophysical Research: Earth Surface*, 120, 1189–1205, <https://doi.org/10.1002/2014JF003376>.Received, 2015.
- Campforts, B., Schwanghart, W., and Govers, G.: Accurate simulation of transient landscape evolution by eliminating numerical diffusion: the TTLEM 1.0 model, *Earth Surface Dynamics*, 5, 47–66, <https://doi.org/10.5194/esurf-5-47-2017>, publisher: Copernicus GmbH, 2017.
- 420 Campforts, B., Shobe, C. M., Overeem, I., and Tucker, G. E.: The art of landslides: How stochastic mass wasting shapes topography and influences landscape dynamics, *Journal of Geophysical Research: Earth Surface*, 127, e2022JF006745, 2022.
- Carretier, S., Martinod, P., Reich, M., and Godderis, Y.: Modelling sediment clasts transport during landscape evolution, *Earth Surface Dynamics*, 4, 237–251, 2016.
- 425 Castelltort, S. and Van Den Driessche, J.: How plausible are high-frequency sediment supply-driven cycles in the stratigraphic record?, *Sedimentary geology*, 157, 3–13, 2003.

- Croissant, T. and Braun, J.: Constraining the stream power law: A novel approach combining a landscape evolution model and an inversion method, *Earth surface dynamics*, 2, 155–166, 2014.
- 430 Davy, P. and Lague, D.: Fluvial erosion/transport equation of landscape evolution models revisited, *Journal of Geophysical Research: Earth Surface*, 114, 2009.
- Densmore, A. L.: Footwall topographic development during continental extension, *Journal of Geophysical Research*, 109, F03001, <https://doi.org/10.1029/2003JF000115>, 2004.
- Densmore, A. L., Allen, P. A., and Simpson, G.: Development and response of a coupled catchment fan system under changing tectonic and climatic forcing, *Journal of Geophysical Research: Earth Surface*, 112, 2007.
- 435 Fernandes, N. F. and Dietrich, W. E.: Hillslope evolution by diffusive processes: The timescale for equilibrium adjustments, *Water Resources Research*, 33, 1307–1318, 1997.
- Ferrier, K. L., Huppert, K. L., and Perron, J. T.: Climatic control of bedrock river incision, *Nature*, 496, 206–209, 2013.
- Forte, A. M. and Whipple, K. X.: Criteria and tools for determining drainage divide stability, *Earth and Planetary Science Letters*, 493, 102–117, <https://doi.org/10.1016/j.epsl.2018.04.026>, 2018.
- 440 Forzoni, A., Storms, J. E., Whittaker, A. C., and de Jager, G.: Delayed delivery from the sediment factory: Modeling the impact of catchment response time to tectonics on sediment flux and fluvio-deltaic stratigraphy, *Earth Surface Processes and Landforms*, 39, 689–704, 2014.
- Gasparini, N. M., Tucker, G. E., and Bras, R. L.: Network-scale dynamics of grain-size sorting: Implications for downstream fining, stream profile concavity, and drainage basin morphology, *Earth Surface Processes and Landforms*, 29, 401–421, 2004.
- Gasparini, N. M., Whipple, K. X., and Bras, R. L.: Predictions of steady state and transient landscape morphology using sediment-flux-dependent river incision models, *Journal of Geophysical Research: Earth Surface*, 112, <https://doi.org/10.1029/2006JF000567>, [\\_eprint: https://onlinelibrary.wiley.com/doi/pdf/10.1029/2006JF000567](https://onlinelibrary.wiley.com/doi/pdf/10.1029/2006JF000567), 2007.
- 445 Godard, V., Tucker, G. E., Burch Fisher, G., Burbank, D. W., and Bookhagen, B.: Frequency-dependent landscape response to climatic forcing, *Geophysical Research Letters*, 40, 859–863, 2013.
- Goren, L.: A theoretical model for fluvial channel response time during time-dependent climatic and tectonic forcing and its inverse applications, *Geophysical Research Letters*, 43, <https://doi.org/10.1002/2016GL070451>, 2016.
- 450 Goren, L., Willett, S. D., Herman, F., and Braun, J.: Coupled numerical–analytical approach to landscape evolution modeling, *Earth Surface Processes and Landforms*, 39, 522–545, 2014.
- Hack, J. T.: *Studies of longitudinal stream profiles in Virginia and Maryland*, vol. 294, US Government Printing Office, 1957.
- Han, J., Gasparini, N. M., Johnson, J. P., and Murphy, B. P.: Modeling the influence of rainfall gradients on discharge, bedrock erodibility, and river profile evolution, with application to the Big Island, Hawai’i, *Journal of Geophysical Research: Earth Surface*, 119, 1418–1440, 2014.
- 455 Han, J., Gasparini, N. M., and Johnson, J. P.: Measuring the imprint of orographic rainfall gradients on the morphology of steady-state numerical fluvial landscapes, *Earth Surface Processes and Landforms*, 40, 1334–1350, 2015.
- Hilley, G., Strecker, M. R., and Ramos, V.: Growth and erosion of fold-and-thrust belts with an application to the Aconcagua fold-and-thrust belt, Argentina, *Journal of Geophysical Research: Solid Earth*, 109, 2004.
- 460 Hobley, D. E. J., Adams, J. M., Nudurupati, S. S., Hutton, E. W. H., Gasparini, N. M., Istanbuloglu, E., and Tucker, G. E.: Creative computing with Landlab: an open-source toolkit for building, coupling, and exploring two-dimensional numerical models of Earth-surface dynamics, *Earth Surface Dynamics*, 5, 21–46, <https://doi.org/10.5194/esurf-5-21-2017>, 2017.

- Howard, A. D.: A detachment-limited model of drainage basin evolution, *Water Resources Research*, 30, 2261–2285, <https://doi.org/10.1029/94WR00757>, eprint: <https://onlinelibrary.wiley.com/doi/pdf/10.1029/94WR00757>, 1994.
- 465 Hurst, M. D., Grieve, S. W., Clubb, F. J., and Mudd, S. M.: Detection of channel-hillslope coupling along a tectonic gradient, *Earth and Planetary Science Letters*, 522, 30–39, <https://doi.org/10.1016/j.epsl.2019.06.018>, 2019.
- Istanbulluoglu, E. and Bras, R. L.: Vegetation-modulated landscape evolution: Effects of vegetation on landscape processes, drainage density, and topography, *Journal of Geophysical Research: Earth Surface*, 110, 2005.
- 470 Kirby, E. and Whipple, K. X.: Expression of active tectonics in erosional landscapes, *Journal of Structural Geology*, 44, 54–75, 2012.
- Kwang, J. and Parker, G.: Extreme memory of initial conditions in numerical landscape evolution models, *Geophysical Research Letters*, 46, 6563–6573, 2019.
- Kwang, J. S. and Parker, G.: Landscape evolution models using the stream power incision model show unrealistic behavior when  $m/n$  equals 0.5, *Earth Surface Dynamics*, 5, 807–820, 2017.
- 475 Kwang, J. S., Langston, A. L., and Parker, G.: The role of lateral erosion in the evolution of nondendritic drainage networks to dendricity and the persistence of dynamic networks, *Proceedings of the National Academy of Sciences*, 118, e2015770118, 2021.
- Lague, D.: The stream power river incision model: evidence, theory and beyond, *Earth Surface Processes and Landforms*, 39, 38–61, <https://doi.org/10.1002/esp.3462>, 2014.
- Li, Q., Gasparini, N. M., and Straub, K. M.: Some signals are not the same as they appear: How do erosional landscapes transform tectonic  
480 history into sediment flux records?, *Geology*, 46, 407–410, 2018.
- Lyons, N. J., Val, P., Albert, J. S., Willenbring, J. K., and Gasparini, N. M.: Topographic controls on divide migration, stream capture, and diversification in riverine life, *Earth Surface Dynamics*, 8, 893–912, <https://doi.org/10.5194/esurf-8-893-2020>, 2020.
- Mackey, B. H., Scheingross, J. S., Lamb, M. P., and Farley, K. A.: Knickpoint formation, rapid propagation, and landscape response following coastal cliff retreat at the last interglacial sea-level highstand: Kaua ‘i, Hawai ‘i, *Bulletin*, 126, 925–942, 2014.
- 485 O’Hara, D., Karlstrom, L., and Roering, J. J.: Distributed landscape response to localized uplift and the fragility of steady states, *Earth and Planetary Science Letters*, 506, 243–254, 2019.
- Perron, J. T. and Fagherazzi, S.: The legacy of initial conditions in landscape evolution, *Earth Surface Processes and Landforms*, 37, 52–63, 2012.
- Refice, A., Giachetta, E., and Capolongo, D.: SIGNUM: A Matlab, TIN-based landscape evolution model, *Computers & Geosciences*, 45,  
490 293–303, 2012.
- Roe, G. H., Whipple, K. X., and Fletcher, J. K.: Feedbacks among climate, erosion, and tectonics in a critical wedge orogen, *American Journal of Science*, 308, 815–842, 2008.
- Roering, J. J.: How well can hillslope evolution models “explain” topography? Simulating soil transport and production with high-resolution topographic data, *GSA Bulletin*, 120, 1248–1262, <https://doi.org/10.1130/B26283.1>, 2008.
- 495 Roering, J. J., Kirchner, J. W., and Dietrich, W. E.: Hillslope evolution by nonlinear, slope-dependent transport: Steady state morphology and equilibrium adjustment timescales, *Journal of Geophysical Research: Solid Earth*, 106, 16 499–16 513, 2001.
- Romans, B. W., Castelltort, S., Covault, J. A., Fildani, A., and Walsh, J.: Environmental signal propagation in sedimentary systems across timescales, *Earth-Science Reviews*, 153, 7–29, 2016.
- Rosenbloom, N. and Anderson, R. S.: Hillslope and channel evolution in a marine terraced landscape, Santa Cruz, California, *Journal of*  
500 *Geophysical Research*, 99, 14 013–14 029, 1994.
- Salles, T.: eSCAPE: Regional to global scale landscape evolution model v2. 0, *Geoscientific Model Development*, 12, 4165–4184, 2019.

- Schwanghart, W. and Scherler, D.: Short Communication: TopoToolbox 2 - MATLAB based software for topographic analysis and modeling in Earth surface sciences, *Earth Surface Dynamics*, 2, 1–7, <https://doi.org/10.5194/esurf-2-1-2014>, 2014.
- 505 Shelef, E. and Hilley, G. E.: A unified framework for modeling landscape evolution by discrete flows, *Journal of Geophysical Research: Earth Surface*, 121, 816–842, 2016.
- Shobe, C. M., Tucker, G. E., and Barnhart, K. R.: The SPACE 1.0 model: a Landlab component for 2-D calculation of sediment transport, bedrock erosion, and landscape evolution, *Geoscientific Model Development*, 10, 4577–4604, 2017.
- Shobe, C. M., Tucker, G. E., and Rossi, M. W.: Variable-Threshold Behavior in Rivers Arising From Hillslope-Derived Blocks, *Journal of Geophysical Research: Earth Surface*, 123, 1931–1957, <https://doi.org/10.1029/2017JF004575>, 2018.
- 510 Simpson, G. and Castelltort, S.: Model shows that rivers transmit high-frequency climate cycles to the sedimentary record, *Geology*, 40, 1131–1134, 2012.
- Snyder, N. P., Whipple, K. X., Tucker, G. E., and Merritts, D. J.: Landscape response to tectonic forcing: Digital elevation model analysis of stream profiles in the Mendocino triple junction region, northern California, *Geological Society of America Bulletin*, 112, 1250–1263, 2000.
- 515 Stark, C. P. and Stark, G. J.: A channelization model of landscape evolution, *American Journal of Science*, 301, 486–512, 2001.
- Steer, P.: Analytical models for 2D landscape evolution, *Earth Surface Dynamics Discussions*, 2021, 1–17, 2021.
- Stolar, D., Roe, G., and Willett, S.: Controls on the patterns of topography and erosion rate in a critical orogen, *Journal of Geophysical Research: Earth Surface*, 112, 2007.
- Stolar, D. B., Willett, S. D., and Roe, G. H.: Climatic and tectonic forcing of a critical orogen, in: *Tectonics, Climate, and Landscape Evolution*, Geological Society of America, [https://doi.org/10.1130/2006.2398\(14\)](https://doi.org/10.1130/2006.2398(14)), 2006.
- 520 Straub, K. M., Duller, R. A., Foreman, B. Z., and Hajek, E. A.: Buffered, incomplete, and shredded: The challenges of reading an imperfect stratigraphic record, *Journal of Geophysical Research: Earth Surface*, 125, e2019JF005 079, 2020.
- Tarboton, D. G.: A new method for the determination of flow directions and upslope areas in grid digital elevation models, *Water Resources Research*, 33, 309–319, <https://doi.org/10.1029/96wr03137>, 1997.
- 525 Theodoratos, N., Seybold, H., and Kirchner, J. W.: Scaling and similarity of a stream-power incision and linear diffusion landscape evolution model, *Earth Surface Dynamics*, 6, 779–808, 2018.
- Tofelde, S., Bernhardt, A., Guerit, L., and Romans, B. W.: Times associated with source-to-sink propagation of environmental signals during landscape transience, *Frontiers in Earth Science*, 9, 628315, 2021.
- Tucker, G. and Whipple, K.: Topographic outcomes predicted by stream erosion models: Sensitivity analysis and intermodel comparison, *Journal of Geophysical Research: Solid Earth*, 107, ETG–1, 2002.
- 530 Tucker, G. E. and Bras, R. L.: Hillslope processes, drainage density, and landscape morphology, *Water Resources Research*, 34, 2751–2764, <https://doi.org/10.1029/98WR01474>, [\\_eprint: https://onlinelibrary.wiley.com/doi/pdf/10.1029/98WR01474](https://onlinelibrary.wiley.com/doi/pdf/10.1029/98WR01474), 1998.
- Tucker, G. E., Gasparini, N. M., Bras, R. L., and Lancaster, S. L.: A 3D Computer Simulation Model of Drainage Basin and Floodplain Evolution: Theory and Applications, Technical report prepared for U.S. Army Corps of Engineers Construction Engineering Research Laboratory, 1999.
- 535 Tucker, G. E., Lancaster, S. T., Gasparini, N. M., and Bras, R. L.: The channel-hillslope integrated landscape development model (CHILD), in: *Landscape erosion and evolution modeling*, edited by Harmon, R. S. and Doe, W. W., pp. 349–388, Springer, New York, 2001a.
- Tucker, G. E., Lancaster, S. T., Gasparini, N. M., Bras, R. L., and Rybarczyk, S. M.: An object-oriented framework for distributed hydrologic and geomorphic modeling using triangulated irregular networks, *Computers & Geosciences*, 27, 959–973, 2001b.

- 540 Tucker, G. E., Hutton, E. W. H., Piper, M. D., Campforts, B., Gan, T., Barnhart, K. R., Kettner, A. J., Overeem, I., Peckham, S. D., McCreedy, L., and Syvitski, J.: CSDMS: a community platform for numerical modeling of Earth surface processes, *Geoscientific Model Development*, 15, 1413–1439, <https://doi.org/10.5194/gmd-15-1413-2022>, 2022.
- Val, P., Lyons, N. J., Gasparini, N., Willenbring, J. K., and Albert, J. S.: Landscape evolution as a diversification driver in freshwater fishes, *Frontiers in Ecology and Evolution*, 9, 788–328, 2022.
- 545 Ward, D. J. and Galewsky, J.: Exploring landscape sensitivity to the Pacific Trade Wind Inversion on the subsiding island of Hawaii, *Journal of Geophysical Research: Earth Surface*, 119, 2048–2069, 2014.
- Whipple, K. X.: Fluvial landscape response time: How plausible is steady-state denudation?, *American Journal of Science*, 301, 313–325, 2001.
- Whipple, K. X. and Meade, B.: Controls on the strength of coupling among climate, erosion, and deformation in two-sided, frictional orogenic wedges at steady state, *Journal of Geophysical Research*, 109, F01 011–F01 011, <https://doi.org/10.1029/2003JF000019>, 2004.
- 550 Whipple, K. X. and Meade, B.: Orogen response to changes in climatic and tectonic forcing, *Earth and Planetary Science Letters*, 243, 218–228, 2006.
- Whipple, K. X. and Tucker, G. E.: Dynamics of the stream-power river incision model: Implications for height limits of mountain ranges, landscape response timescales, and research needs, *Journal of Geophysical Research: Solid Earth*, 104, 17 661–17 674, <https://doi.org/10.1029/1999JB900120>, [\\_eprint: https://onlinelibrary.wiley.com/doi/pdf/10.1029/1999JB900120](https://onlinelibrary.wiley.com/doi/pdf/10.1029/1999JB900120), 1999.
- 555 Whipple, K. X. and Tucker, G. E.: Implications of sediment-flux-dependent river incision models for landscape evolution, *Journal of Geophysical Research: Solid Earth*, 107, ETG 3–1–ETG 3–20, <https://doi.org/10.1029/2000JB000044>, [\\_eprint: https://onlinelibrary.wiley.com/doi/pdf/10.1029/2000JB000044](https://onlinelibrary.wiley.com/doi/pdf/10.1029/2000JB000044), 2002.
- Whipple, K. X., Forte, A. M., DiBiase, R. A., Gasparini, N. M., and Ouimet, W. B.: Timescales of landscape response to divide migration and drainage capture: Implications for the role of divide mobility in landscape evolution, *Journal of Geophysical Research: Earth Surface*, <https://doi.org/10.1002/2016JF003973>, 2017.
- 560 Whittaker, A. C.: How do landscapes record tectonics and climate, *Lithosphere*, 4, 160–164, 2012.
- Whittaker, A. C. and Boulton, S. J.: Tectonic and climatic controls on knickpoint retreat rates and landscape response times, *Journal of Geophysical Research: Earth Surface*, 117, 2012.
- 565 Willett, S. D. and Brandon, M. T.: On steady states in mountain belts, *Geology*, 30, 175–178, 2002.
- Willett, S. D., McCoy, S. W., Perron, J. T., Goren, L., and Chen, C.-Y.: Dynamic reorganization of river basins, *Science*, 343, 1248 765–1248 765, <https://doi.org/10.1126/science.1248765>, 2014.
- Willgoose, G., Bras, R. L., and Rodriguez-Iturbe, I.: A coupled channel network growth and hillslope evolution model: 1. Theory, *Water Resources Research*, 27, 1671–1684, <https://doi.org/10.1029/91WR00935>, [\\_eprint: https://onlinelibrary.wiley.com/doi/pdf/10.1029/91WR00935](https://onlinelibrary.wiley.com/doi/pdf/10.1029/91WR00935), 1991.
- 570 Zhang, Y., Slingerland, R., and Duffy, C.: Fully-coupled hydrologic processes for modeling landscape evolution, *Environmental Modelling & Software*, 82, 89–107, 2016.