

Author's Response

Short communication: Landlab v2.0: A software package for Earth surface dynamics

Barnhart et al., submitted 2020

Note: The text shown here in the Author's Response document is the same as the text in the Public Author Comment.

1 General updates made independent of reviewer comments

The manuscript was updated to reflect the addition of one new component.

2 Response to reviewer Tristan Salles

We thank reviewer Salles for his review. As he recommended no changes be made, we have made no changes in response to his review.

3 Response to reviewer Wolfgang Schwanghart

Reviewer Schwanghart's review recommended that we revise the text to address the following issues:

1. Reduce the use of syntax and bulleted lists, and use more plain language in Section 4 in order to make it more accessible.
2. Add one or more figures that illustrate example output of Landlab.
3. Change the subsection on citing Landlab to its own section.

We agree with all of reviewer Schwanghart's recommendations and have revised the text accordingly. A new Figure 1 provides six example applications from the literature and the subsection on citations is now its own section.

Our revision in response to Point 1 aims to balance our efforts to increase readability and understandability with the value of the technical aspects of the manuscript. We think there is value in providing the technical detail, and in exposing some of the thinking that underlies technical choices. We agree, however, that is is not useful or valuable if it is not understandable.

In our revision of this section, we have focused on improving accessibility wherever possible, and adding context for why such technical text is present. Where possible we worked to connect why technical details or changes matter for an end user. For example, we added background and context on what an interface standard is and how it is useful to an end user to the start of Section 4.2 (Updates to the Component Standard Interface). While we have not excised all use of inline syntax and bulleted lists in the text we have removed much of it. We think our revision of Section 4 has made it more readable and accessible.

We note that we have intentionally not made substantial changes to Section 4.3 (Removed or Modified Components and Utilities). One might argue that this section is reminiscent of a change log, yet in many ways that is its intent. This section is designed to highlight major changes and removals *and provide a description of why they were removed*.

In his review Reviewer Schwanghart states "My only concern is that the paper mixes quite generic issues in software development in the geosciences with very technical issues specific to Landlab." This comment is perceptive and clearly identifies two (potentially competing) goals that we had in drafting this manuscript: to document and describe technical details of Landlab *and* to share general lessons learned in the development of Landlab. Yet as the Reviewer Schwanghart points out, these joint goals yield a varyingly technical manuscript. We think that through revisions in response to reviewer comments we have come closer to accomplishing these joint goals.

Short communication: Landlab v2.0: A software package for Earth surface dynamics

Katherine R. Barnhart^{1,2}, Eric W. H. Hutton^{3,4}, Gregory E. Tucker^{1,2,3}, Nicole M. Gasparini⁵, Erkan Istanbuluoglu⁶, Daniel E. J. Hobley⁷, Nathan J. Lyons⁵, Margaux Mouchene⁸, Sai Siddhartha Nudurupati⁶, Jordan M. Adams⁹, and Christina Bandaragoda⁶

¹University of Colorado at Boulder, Cooperative Institute for Research in Environmental Sciences, Boulder, Colorado

²University of Colorado at Boulder, Department of Geological Sciences, Boulder, Colorado

³University of Colorado at Boulder, Community Surface Dynamics Modeling System Integration Facility, Boulder, Colorado

⁴University of Colorado at Boulder, Institute for Arctic and Alpine Research, Boulder, Colorado

⁵Tulane University, Department of Earth and Environmental Sciences, New Orleans, Louisiana

⁶University of Washington, Department of Civil and Environmental Engineering, Seattle, Washington

⁷Cardiff University, School of Earth and Ocean Sciences, Cardiff, Wales, United Kingdom

⁸Univ. Grenoble Alpes, INRAE, ETNA, F-38402 St-Martin-d'Hères, France

⁹Delgado Community College, Division of Science and Math, New Orleans, Louisiana

Correspondence: Katherine Barnhart (katherine.barnhart@colorado.edu)

Abstract. Numerical simulation of the form and characteristics of Earth's surface provides insight into its evolution. Landlab is an Open Source Python package that contains modularized elements of numerical models for Earth's surface, thus reducing time required for researchers to create new or reimplement existing models. Landlab contains a gridding engine which represents the model domain as a dual graph of structured quadrilaterals (e.g., raster) or irregular Voronoi polygon-Delaunay triangle mesh (e.g., regular hexagons, radially symmetric meshes, fully irregular meshes). Landlab also contains *components*—modular implementations of single physical processes—and a suite of utilities ~~which~~ that support numerical methods, input/output, and visualization. This contribution describes package development since version 1.0 and backward-compatibility breaking changes ~~which necessitates~~ that necessitate the new major release, version 2.0. Substantial changes include refactoring the grid, improving the component standard interface, dropping Python 2 support, and creating ~~30~~ 31 new components—for a total of ~~57~~ 58 components in the Landlab package. We describe reasons why many changes were made in order to provide insight to designers of future packages. We conclude by discussing lessons about the dynamics of scientific software development gained from the experience of using, developing, maintaining, and teaching with Landlab.

Copyright statement.

1 Introduction

Landlab is a Python package to support the creation of numerical models in Earth surface dynamics. Numerical models support researchers to simulate past, present, and future dynamics of a ~~system~~ this system. This enables conceptual model validation,

testing of alternative hypotheses, and prediction under uncertainty. Numerical modeling is especially important for Earth surface dynamics because of the timescale mismatch between human observation and system evolution. Landlab is an Open Source Python-language package that provides the common elements of infrastructure needed to support the creation of new models. 20 These include a model domain representation (the *model grid*), physical process *components*, and utilities that support use and extension of the package. Landlab's modular design lowers the barriers of entry to computational research, reduces researcher time, and supports publication of reproducible scientific research products (e.g., Bandaragoda et al., 2019). Development and maintenance of Landlab follows modern software development standards such as version control, integrated testing and documentation, continuous integration, and multi-platform binary distribution (e.g., Adorf et al., 2019; Hwang et al., 2017; Mandli et al., 2016; 25 . Our open source development and use of semantic versioning (SemVer 2.0.0, <https://semver.org>) provides a necessary but not sufficient tool for reproducible research in Earth surface dynamics (e.g., Chen et al., 2018).

Landlab was designed as a key element in the Community Surface Dynamics Modeling System (CSDMS) suite of tools (Peckham et al., 2013). Initial development of Landlab began in 2012 and culminated in a version 1.0 release (referred to as v1.0) described by Hopley et al. (2017). [Figure 1 provides examples of the breadth of modeling efforts implemented with Landlab.](#) 30

Subsequent to the release of v1.0, the core development team and many community members have contributed additional features and bug fixes to the software. Based on experience using and developing with Landlab, the development team identified changes to Landlab that were not backwards compatible, indicating a major release was necessary to convey to Landlab users to expect substantial changes. This motivated the creation of Landlab v2.0, the focus of this contribution. A new major version 35 was needed to support (a) backward-compatibility breaking changes associated with refactoring core data structures, and (b) removal of Python<3 support.

The scope of this contribution is to review the core concepts that underpin Landlab's design (Section 3), describe the changes and new features added since v1.0 (Section 4), [discuss citation of software \(Section 5\)](#), and document lessons we have learned about community software development from developing and maintaining Landlab (Section 6). Before concluding 40 we provide recommendations for those interested in being involved with Landlab (Section 7). [We note that while much of the contribution discusses general issues of scientific software development, Section 4 is inherently specific to Landlab and describes technical details of changes between v1.0 and v2.0.](#) For a comprehensive description of the design and theory behind Landlab v1.0 the reader is referred to Hopley et al. (2017). Additionally, we will not present detailed description of the use of the software, discuss numerical methods, or review the literature that supports each process implemented in Landlab. In 45 general, methods and supporting literature can be found in key publications introducing each component (see Section 5), and guidance on software usage can be found on the Landlab website.

Detailed documentation for Landlab is available on the Landlab ReadTheDocs page <https://landlab.readthedocs.io>. Code availability is described at the end of the contribution. A PDF of the documentation and the source code for v2.0 are archived as the supplemental information to this publication.

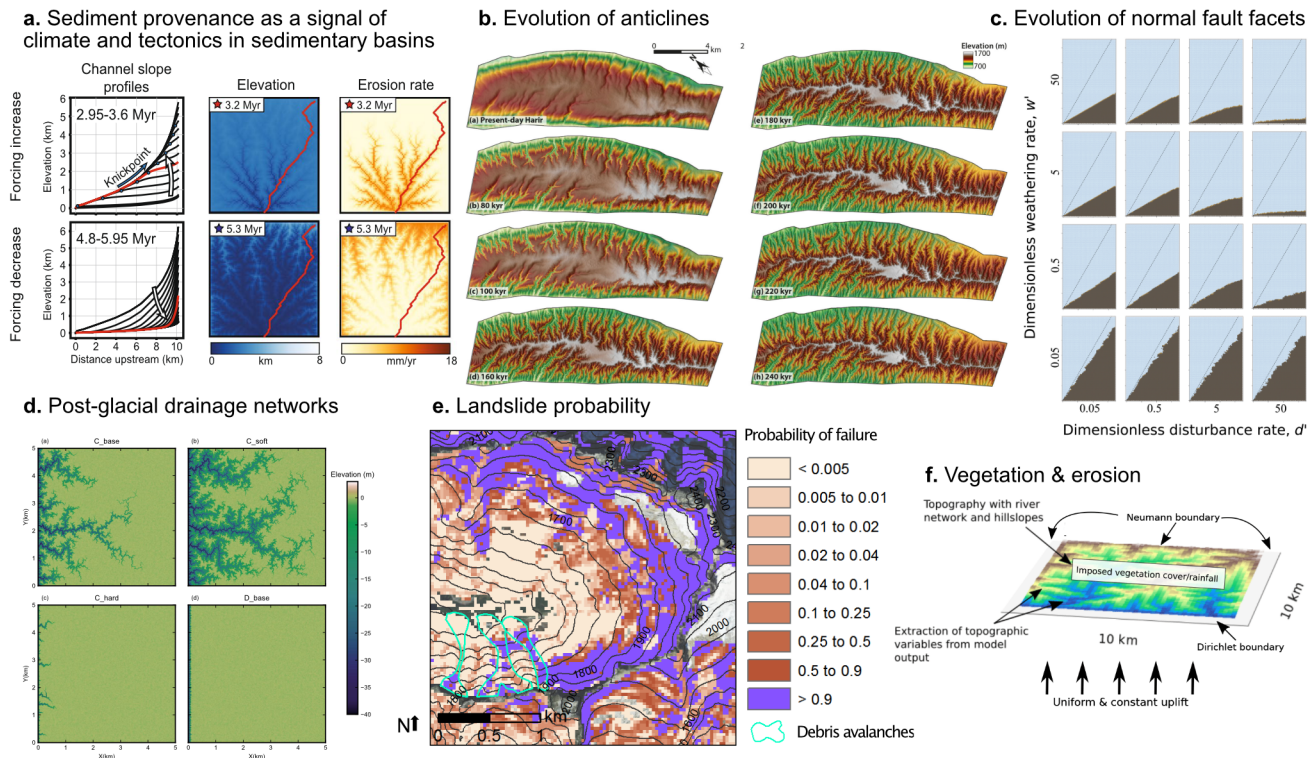


Figure 1. [Examples of modeling applications implemented with Landlab span a wide range of timescales and topics. A recent selection of examples intended to highlight diversity of applications includes the following examples: \(a\) sediment provenance studies \(Sharman et al., 2019, reproduction modified from their Figure 2\), \(b\) landscape evolution of anticlines \(Zebari et al., 2019, reproduction of their Figure 8\), \(c\) cellular automaton simulation of normal fault facets \(Tucker et al., 2020, reproduction of their Figure 9\), \(d\) the evolution of post glacial drainage networks \(Lai and Anders, 2018, reproduction of their Figure 4\), \(e\) estimates of landslide probability \(Strauch et al., 2018, reproduction modified from their Figure 9\), \(f\) and coevolution of vegetation and erosion \(Schmid et al., 2018, reproduction of their Figure 3\).](#)

50 2 The Three Landlab Audiences

The design of the Landlab package, its development practices, and the changes made in v2.0 are best understood in light of the three audiences who interact with the package. Unlike software ~~which~~ [that](#) is developed by dedicated software engineers who ~~do~~ [may](#) not use the software themselves, Landlab developers also use the software for their research and teaching. Thus, the first audience is *user-developers*, people who ~~modify~~ [extend, modify, or otherwise contribute to](#) the source code in order to accomplish their goals. Notably, most ~~of the~~ Landlab user-developers have little to no background in software engineering. The second audience is *users*; ~~people~~ [who use Landlab to write their own programs](#), but do not modify ~~the~~ [or contribute to](#)

Landlab's source code. Among this group, it is natural for some to transition to becoming user-developers, who contribute new components or utilities to the main Landlab code base. The final audience is *teachers-students*, people who use Landlab in an instructional classroom setting as part of a course.

60 In creating the source code, writing the documentation, determining the development practices, and maintaining the package, the needs, abilities, and time constraints of all three audiences must be balanced. This is particularly important for packages like Landlab with a small active developer community ($n < 20$) and a research-scale user community (e.g., tens to hundreds of researchers and perhaps a few thousand students over the lifetime of the software, rather than millions of users). Our approach is to adopt many of the key design principles underlying modern academic software design best-practice
65 (e.g., The Turing Way Community et al., 2019) (e.g., Wilson et al., 2017; The Turing Way Community et al., 2019). These include an extensive automatic test suite, integrated documentation, version control, continuous integration, lint checking, and releasing binary packages for users. These design choices were made to ensure that Landlab is sustainable into the future to support the user community (see Hobley et al., 2017). Users-user-developer-learner communities (see Hobley et al., 2017). Community contributors play an important role in developing community open source ~~software—two software.~~ Two of
70 their most important roles are improving and refining documentation when it is unclear, and identifying software bugs. Because Landlab currently has a relatively small user base with limited experience contributing to documentation, it takes longer (months to years) for documentation to be refined by users compared to software with more users (days to months). The relatively long "refinement residence time" means that a commitment to high quality tests is critically important (see Section 6.1).

75 3 Landlab Core Concepts

A core design principle behind the Landlab package is *modularity*. Separating the elements of a numerical model into reusable parts decreases the human-time associated with creating a new model or extending a current one. The design of Landlab is discussed extensively in Hobley et al. (2017). Here we briefly summarize the key points to provide context to the changes and new features that are discussed further in Section 4.

80 The modular design of Landlab comprises the following categories of software infrastructure:

1. *Model Grids*, data structures implemented as Python classes that represent the computational domain, connectivity between parts of the domain, and provide a centralized location to store state variables;
2. *Utilities*, functions that provide solutions to common problems (e.g., numerical functions for gradients, mapping, and flux divergence; basic plotting; watershed delineation; and file input/output).
- 85 3. *Components*, representation of core surface processes (e.g., stream power, flow accumulation, precipitation) as a Python class with a common interface.

The grid represents a 2D domain as two sets of connected points, lines and polygons, offset and overlaid on each other; it constitutes a formal dual-graph in graph theory terminology. Each graph in the dual-graph is a set of points, connected by lines,

and outlining polygons. Each graph is a *planar graph*, meaning that the lines connecting points do not cross. In Landlab, we refer to the first graph as composed of *nodes* connected by *links* which outline *patches*. *Corners* are located ~~at the center of patches~~, inside patches and are connected by *faces*, which outline *cells*. ~~In such a way~~ With this framework, data identified at a given point in space has both a connectivity to other points defined by its lines, and a uniquely associated spatial area and set of bounding edges drawn the from enclosing polygon in the other graph.

There are four aspects of the grid that are worth highlighting. First is that the Landlab model grids provide information about the connectivity and adjacency of all grid *elements* (nodes, links, patches, corners, faces, and cells). Second, the model grids use a consistent framework for the numbering of grid elements and identifying a *direction* for each link and face (note that this is a topologic direction based on the orientation of the link in *x-y* space, not a flow direction). This permits consistent application of numerical methods based on grid element ID that may be transferred to grids of different shapes and sizes.

Third, Landlab supports regular and irregular model grids through the same interface. The Landlab model grid library includes data structures for networks, regular rasters, general irregular meshes (Voronoi cells with Delaunay triangulated nodes), regular hexagons, and radially symmetric irregular meshes. Landlab v2.0 assumes all links and faces are straight. The model grids were designed to accommodate extension to more exotic 2D geometries.

Finally, the model grid may be used to store data *fields* at any grid element. Fields represent state variables and are useful when multiple components use or modify the state variables. When a field is stored on the grid, Landlab enforces characteristics such as the number of elements, and provides the ability to use adjacency information associated with the grid.

The Landlab model grids keep track of boundary conditions using arrays of integers with flags indicating characteristics such as fixed-value, fixed-gradient, or closed to flux (`grid.status_at_X` where X is the name of the grid element). Note that we will use preformatted style text to indicate Landlab syntax. Thus far, most applications with Landlab use nodes and links as the primary grid elements. Thus, sets of standard boundary condition flags are presently only implemented for these two types of grid elements.

Utilities fall into two subcategories: general numerical utilities, and application-focused utilities. In the first category are functions ~~which that~~ calculate quantities such as gradients or flux divergence, and map values from one grid element to another. Development has created numerical utilities focused on finite-difference/volume numerical solutions to differential equations and cellular automaton applications. This, however, reflects the interests of developers rather than the potential characteristics of the package. In the second category are application-focused utilities, which implement functions used multiple times in the package.

Components are Python objects with a standard interface that implement a single Earth surface process, set of equations, or analysis compatible with the component interface (e.g. calculation of drainage density). All components require a Landlab model grid to instantiate, and have a bound function that advances the component forward in time or updates it based on the current values stored as fields. Components can be coupled by accessing and modifying the same fields stored on the model grid elements.

4 Changes and New Features Added Since Landlab v1.0

Landlab v2.0 contains many changes to the core source code that add new features. We have compiled ~~Tables~~tables describing the pre-existing, refactored, and new core capabilities of the Landlab package. ~~Specifically, These include~~ data structures (Table 1), utilities (Table 2), new components (Table 3), and pre-existing or refactored components (Table 4). We list core package, development environment, testing, tutorial, and documentation dependencies in Table 5.

This section focuses on the technical details of what has changed between Landlab v1.0 and v2.0. One might glean comparable information from reading the software repositories' change logs. Inclusion of the technical details here is intended to summarize key changes. In addition, where relevant, we describe why changes or improvements were made. This explanation is intended both for current and future users of Landlab as well as for those interested in scientific software development generally.

Changes that broke backward compatibility were required to incorporate some of the new features in Landlab v2.0. This necessitated a new major version. These changes included: (i) binding of the boundary condition flags to model grids (Section 4.1.3), (ii) a revision to the Component standard interface (Section 4.2), (iii) deprecation and removal of certain components and utilities (Section 4.3), (iv) dropping Python 2 support (following sunseting of this version at the end of 2019 by the Python Software Foundation). Additionally, we completely revised the documentation structure (Section 4.4).

~~Citation of research software is a persistent challenge (e.g., Niemeyer et al., 2016). This is especially difficult for Landlab because the package itself requires citations, and in addition, depending on the components used, other citations are required. To address this issue, we have designed a Landlab tool that makes it easier for users to know what references to cite based on what parts of Landlab they have used (Section 5).~~

Landlab v2.0 is designed to work with a number of other Python tools for numerical modelling. They are summarized in Section 4.5.

4.1 Improvements to the Landlab Model Grids

Here we highlight three improvements to the Landlab model grid in v2.0.

4.1.1 Grids Inherit from Graphs

Each Landlab model grid combines a dual-graph topology with the ability to store fields at grid elements and keep track of boundary conditions. While the concept of a dual-graph is not new in Landlab v2.0, the package architecture has been revised to create a set of graph classes from which the Landlab model grids inherit (Table 1, ~~located in the landlab.graph submodule~~).

The Landlab graphs describe the topology and connectivity of a dual graph of nodes-links-patches/corners-faces-cells, and specify the x and y coordinates of the nodes and corners. ~~It~~The package contains support for 1D and 2D graphs, and for graphs not yet used in Landlab grids (e.g., `DualStructuredQuadGraph`). It was designed to be re-usable by projects external to Landlab. While the graph capabilities do not yet support 3D graphs, the package was designed with extension to 3D in mind.

Table 1. Major Data Structures in Landlab v2.0

Name	Summary	New/Refactored?
Graphs		
NetworkGraph	Graph with only nodes and links.	New
DualVoronoiGraph	Unstructured dual-graph of node-link-patch Delaunay triangles and corner-face-cell Voronoi polygons.	New
DualHexGraph	Dual-graph of node-link-patch triangles and corner-face-cell regular hexagons.	New
DualRadialGraph	Dual-graph with radially symmetric nodes.	New
DualStructuredQuadGraph	Dual-graph of structured quadrilaterals. Link and face lengths vary, and orthogonality of links and faces is not required. This graph does not yet support a grid.	New
DualRectilinearGraph	Dual-graph of quadrilaterals. Link and face lengths may be variable but angles are orthogonal. This graph does not yet support a grid.	New
DualUniformRectilinearGraph	Dual graph of constant-sized rectangles. x and y link and face lengths may be different, but are constant across the grid and are orthogonal.	New
Model Grids		
NetworkModelGrid	Model grid that inherits from the <code>NetworkGraph</code>	New
VoronoiDelaunayModelGrid	Model grid that inherits from the <code>DualVoronoiGraph</code>	Refactored
HexModelGrid	Model grid that inherits from the <code>DualHexGraph</code>	Refactored
RadialModelGrid	Model grid that inherits from the <code>DualRadialGraph</code>	Refactored
RasterModelGrid	Model grid that inherits from the <code>DualUniformRectilinearGraph</code>	Refactored
Other data structures		
EventLayers	Data structure that keeps track of a timeseries of thicknesses and a generic set of properties at all of one grid element (e.g., cells). In <code>EventLayers</code> every time point is recorded, such that erosion of layers retains a series of zero thickness. <code>EventLayers</code> is more appropriate if a user is interested in chronostratigraphy.	New
MaterialLayers	Same as <code>EventLayers</code> except that when erosion occurs, no layer is recorded, and when equivalent material is deposited, layers can be joined.	New
DataRecord	Data structure to store a generic set of variables in time and/or on grid elements.	New

Building the model grids to inherit from the graph data structure results in all model grids containing a complete set of topology-derived attributes (e.g., `grid.links_at_node`) and attribute naming consistency between model grids. In addition, all of the topology-derived attributes are only created when needed (**just-in-time** just-in-time memory allocation) and are cached. This was inconsistently implemented in v1.0 and provides an improvement for memory management and speed.

Table 2. Major New Utilities in Landlab v2.0

Submodule	Summary
<code>landlab.utils.distance_to_divide</code>	Calculate distance between nodes and watershed divides.
<code>landlab.utils.flow__distance</code>	Calculate distance between nodes and watershed outlets.
<code>landlab.utils.watershed</code>	Identify and label nodes that belong to individual watershed.
<code>landlab.values</code>	Create generic, reproducible, synthetic fields based on Python dictionaries or yaml input files.

The graph and model grid data structures are all built on the `xarray` Python package’s `Dataset` (Hoyer and Hamman, 2016). Using `xarray.Dataset` provides a number of advantages including improved input and output to the NetCDF
160 format, use of `xarray`’s optimized data structures, and the possibility to take advantage of `xarray`-compatible parallelization related tools (e.g., `dask`, Dask Development Team, 2016; Rocklin, 2015) without breaking backwards compatibility.

4.1.2 Improved Treatment of Diagonals

The `RasterModelGrid` can optionally contain an additional grid element called a *diagonal* that, which connects nodes but also crosses corners (Figure 2). Including this grid element violates the assumption of a plane graph because the diagonal elements cross one another. However use of diagonal elements has a long history in Earth surface dynamics modelling; in order to
165 support historical algorithms (e.g., D8 flow routing, O’Callaghan and Mark, 1984), `Landlab`’s `RasterModelGrid` contains support for diagonals. This permits studies ,similar to similar to Shelef and Hilley (2013), that cross-compare implementations with and without diagonals (e.g., Shelef and Hilley, 2013).

`Landlab` v1.0 had a partial implementation of diagonals in which there was no consistent way to refer to the diagonals or the
170 group of linear elements composed of both links and diagonals. In addition, we had an incomplete set of adjacency structures describing diagonals, and we had no mechanism to store values at diagonals on fields. We now consistently call the set of links and diagonals *d8s*, and have implemented adjacency structures and some numerical functions for diagonals and *d8s* that mirror those for links. `Landlab` assigns a unique ID to each grid element (see Hobbey et al., 2017, their Figure 4). For example, the nodes are identified with ID numbers from zero to number of nodes minus one, and links are identified with numbers from zero
175 to number of links minus one. The unique IDs assigned to the *d8-d8s* refer first to the links and then to the diagonals (in this contribution we will use “d8” to refer to the grid element and “D8” to refer to the flow routing approach).

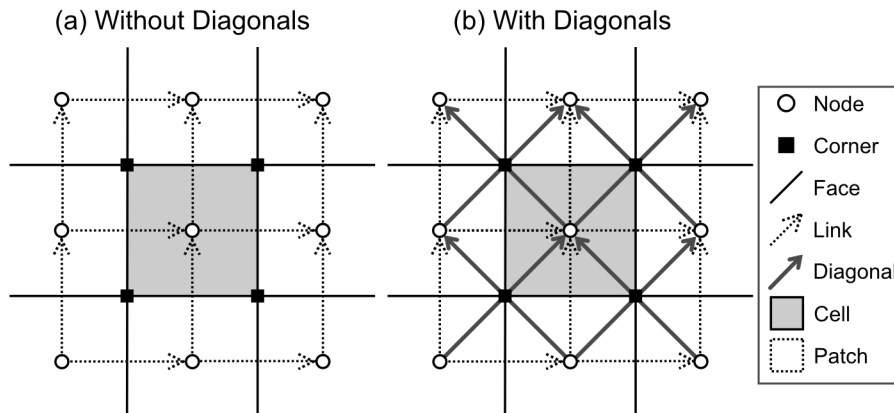


Figure 2. Grid elements of `RasterModelGrid` without (a) and with (b) diagonals.

4.1.3 Bound Boundary Condition Flags

Landlab v2.0 provides boundary condition status arrays for nodes, links, corners, faces, and, if applicable, diagonals and d8s. Because cells and patches are uniquely associated with their own nodes and corners, we do not supply specific status arrays for those elements. Boundary condition status is indicated by a set of flags that indicate the status (Table 6 indicates flag names, see Hobley et al. 2017, their Section 3.1.4 for discussion of boundary conditions). Landlab does not enforce whether a component honors boundary condition flags—the status arrays and flags are provided simply as a convenience to developers. As in v1.0, we enforce internal consistency of boundary conditions across connected grid element types. e.g. For example, an update to boundary conditions status at a node will automatically propagate into the connecting links as appropriate, and vice versa.

Prior to v2.0, the flags used to indicate node and link status were not bound to the model grids. In v2.0 we bound these as attributes of the model grid because we want these flags to be inseparable from the grids that use them. Along with binding the flags to the grid, we modified the names for clarity (Table 6).

4.2 Updates to the Component Standard Interface

Scientific software and data are much easier to work with when they follows standards. Software tools in particular become much more accessible when they provide a standard interface: a common set of functions that look and act in a similar way across many different elements of the software. Landlab’s components use a lightweight interface that is inspired by the CSDMS Basic Model Interface (BMI) (Peckham et al., 2013; Hutton and Piper, 2020a), but which takes advantage of object-oriented features of the Python language, allowing it to be more compact. (Landlab also includes built-in functionality that converts any Landlab component into a BMI component, for use in frameworks like CSDMS’ Python Modeling Tool (Hutton and Piper, 2020b)). In addition to its interface, each Landlab component also encodes metadata in a standardized format; these metadata include, for example, information about the component’s input and output fields.

We made changes to the expectations of component interface, metadata, and code standards based on our experience developing components, supporting community members, and using components in science applications. The enhanced interface standard is designed to improve usability and documentation, and to make clearer expectations for contributed components. We have implemented automated tests that ensure existing and contributed components meet this interface standard.

4.2.1 Changes to the Component `__init__` Method

The design of many numerical model programs follows the “initialize-run-finalize” pattern (e.g., Peckham et al., 2013; Hutton and Piper, 2013). In the Basic Model Interface, the initialization step is handled by the standard `initialize()` function, and stepwise updating is handled by the `update()` function. For Landlab components, which are implemented as Python objects, the class `__init__` method implements initialization, and stepwise updating is normally handled by a method called either `run_one_step` or `update`. Hobley et al. (2017, their section 3.3.1) defined the interface for Landlab components with the function signature for instantiation (`Component.__init__`) and advancing forward (`Component.run_one_step`). The v1.0 component instantiation interface defined with the function definition of: `__init__(self, grid, arg1, arg2..., kwd1=a, kwd2=b, kwd3=c, ..., **kwds)`. Here `arg1` represents a generic argument and `kwd1=a` represents a generic keyword argument. The `**kwds` was included so that a user could make a single dictionary (or yaml file) containing all of the keyword arguments for all components used in a model, and pass the same dictionary to all components. However, an undesirable side effect of this design was that a slight misspelling of a keyword argument would result in use of the default value with no error raised. To remedy this flaw we revised the instantiation standard to remove the `**kwds`; that is, a user may now only supply the component with input parameters that are explicitly declared in its signature.

In addition we expanded the requirements for ~~what a component’s must do: Components must~~ component instantiation. These requirements help promote standardization among Landlab components. One new requirement is that components must inherit from the `Component` base class and call the instantiation method of the base class (`super` ~~in their~~) as part of their instantiation. This ensures that all components take full advantage of the base class functionality and internal checking. ~~By; for example, the base class will automatically make sure that all of the output fields listed in the header metadata are created, so the component author only needs to ensure that the metadata are present. A related requirement is that by the end of instantiation, all output fields made by the component must exist and have the data type specified by the component metadata. A This provides for other components that may check for these fields as input. Finally, a component must raise a `ValueError` if unused keyword arguments are provided. A component must raise a `ValueError` if a grid type the component does not support is provided.~~ sensible error when bad values are provided (for example if an unsupported grid type or unused keyword argument is provided).

4.2.2 Changes to the Component Run Method

The v1.0 component interface defined a run method with a function signature `run_one_step(dt, *args, **kwds)` where `dt` represents the duration of time the model runs forward, `*args` represents a generic list of arguments, and `**kwds` represents a generic set of keyword arguments. In practice, we found that many Landlab components were not able to follow

this interface standard because it was not flexible enough. For example, some components do not require a `dt` and thus did not take `dt`. We also found the presence of `*args` and `**kwargs` in the `run_one_step` problematic because it complicated wrapping components with a Basic Model Interface (BMI, Peckham et al., 2013; Hutton and Piper, 2020a) for use with the Python Modeling Tool (PyMT, Hutton and Piper, 2020b).

235 The revised interface balances standardization and flexibility. Components are no longer required to provide a method with the name `run_one_step`, but if they do not, then an alternative update/execution function must be provided and its usage clearly documented in the component's header docstring. The new expectation is that if `run_one_step` is used it will either take ~~`dt`~~ a time duration or nothing. Thus components with a `run_one_step` method can be easily incorporated into PyMT. Pre-existing components that took arguments or keyword arguments in ~~the their~~ their `run_one_step` method have been refactored

240 ~~to either provide those values at instantiation, or to use `properties`, `getters`, and `setters`. Components are no longer required to provide a `run_one_step` method, but if they do not, then an alternative update/execution function must be provided and its usage clearly documented in the component's header docstring~~`properties`, `getters`, and `setters`. The terms `getter` and `setter` come from object-oriented programming, and they refer to small functions that retrieve the value of (`get`) or assign a value to (`set`) a particular variable. Although it might seem odd to create functions to handle such seemingly trivial tasks, the practice has the

245 advantage of enabling defensive programming (e.g., a setter can check for the right data type), allowing a program to create a particular variable only when it is requested (which can save memory), and supporting built-in documentation (in the form of function documentation) for each variable. In Landlab (as in Python practice generally) getters and setters are implemented using the Python `@property` decorator. Those variables that use getters and setters are considered to be public, meaning that programmers using the component can easily inspect and, if desired, change their values. Other variables are considered

250 private: used only by the component internally, and not to be modified (to indicate this, the names of private variables are preceded by an underscore character).

4.2.3 New Component Metadata Standard

~~The data structure that stores metadata about the fields the component uses and creates was revised. Component metadata describes~~

255 For both data and software, standardized metadata promote efficiency, interoperability, and reuse. To that end, each Landlab component includes a set of metadata in the header of the class that defines the component. Our experience with component metadata in Landlab led us to revise its design for version 2.0.

The metadata section of a Landlab component describes its input fields, output fields, field units, the type of grid element associated with each field, and a long-format description of the field. Metadata are now organized into a single Python dic-

260 tionary, which has a key-value pair for each field used by the component. The new data structure makes it easier to test for completeness and consistency across components.

Each key is a string indicating the field name. The associated value is itself a dictionary that has a standard, required set of keys ~~÷~~ (Table 7).

4.2.4 Additional Component Content Requirements and Recommendations

265 Here we highlight the few remaining component requirements and recommendations. The use of *must* indicates a requirement while the use of *may* or *should* indicates a recommendation.

- All public attributes must be documented *properties* of the Component class, that is, they have the `@property` standard Python decorator. This ensures that other users are able to identify what each public attribute is, and prevents variable modification unless the developer explicitly permits it. This change has little impact on developers time because a developer may elect to use only private attributes.
- If a developer envisions that a component’s public attribute may be modified, they must create a `setter` for it. This provides a place for a component author to write checks that ensure a user cannot incorrectly assign invalid component attributes.
- Field names shared between multiple components must use a consistent definition and dimensions. Some components require parameters and fields to use a particular set of units while others are unit agnostic. This is flagged in the component attribute `Component.unit_agnostic`. It is up to the user to ensure that an application uses consistent units across all fields, components, and input parameters.
- Arguments and keyword arguments should start with lower case letters.
- The grid should be the only argument to the component `__init__`. All other inputs are provided as keyword arguments.
- Keyword arguments should have reasonable default values so that all keywords are truly optional.
- The component’s main method (either `run_one_step` or a custom-designed update/execution function) should return either nothing, the grid, or a single calculated value.

4.3 Removed or Modified Components and Utilities

Several obsolete components and utilities have been removed from Landlab v2.0. Other components were substantially modified. Here we describe these changes.

- The `FlowRouter` component, which did D8 and D4/Steepest Descent flow routing and accumulation, was removed and replaced with the `FlowAccumulator` and a family of `FlowDirector` components. This change provides greater flexibility in options for flow-routing algorithms (e.g., multiple flow directions, D_∞).
- The routing-based surface-water erosion components (such as `StreamPowerEroder`) now use a single consistent method for handling the input runoff rate. The keyword argument `runoff_rate` to the `FlowAccumulator` can now specify a float, array, or field name indicating the runoff rate. This is then accumulated to create the field `surface__water_discharge` which can be used by components that model surface-water erosion.

- The `ModelParameterDictionary` was removed because it represents an old-style input file that has been superseded by the `yaml` format.
- 295 - A new `ChannelProfiler` component replaces the previous `channel-profiling` submodule (`landlab.plot.channel_profile`).
- The `noclobber` keyword argument for field creation was changed to `clobber` because the original name required double negatives and was not intuitive. `noclobber=False` is equivalent to `clobber=True`.
- The ability to pass an array of flooded nodes to the `run_one_step` method in surface-water erosion components was removed and replaced with a keyword argument to `__init__` called `erode_flooded_nodes`.

300

4.4 Reorganization of the Landlab Documentation

The Landlab online documentation is now consolidated onto a single sphinx-based platform (<https://landlab.readthedocs.io/>). Consolidating the documentation onto a single platform with a consistent interface reduces duplication of information, **and improves consistency, and permits comprehensive searches.** The site's design is similar to that of widely used scientific Python packages and was modeled after that of `pandas` (McKinney, 2010). The revised documentation pages include installation instructions, a User Guide (including tutorials), a Guide for Developers, and an API Reference that contains formatted versions of inline documentation within the source code. The documentation source is written in ReStructuredText format, and the source files are provided as part of the Landlab package.

305

4.5 ~~Citation of Packages Built to Work With Landlab and Parts of Landlab~~

310 Landlab was designed as a generic, extensible modelling framework for Earth surface dynamics. Because Landlab exposes BMI (BMI, Hutton and Piper, 2020a), it is compatible with the PyMT package (Hutton and Piper, 2020b)—a Python package that supports running and coupling models that expose a BMI. PyMT provides access to a suite of models written in multiple languages (e.g., Python, fortran, c++) and a standard interface for initializing and running.

315 In addition, two packages have been built using Landlab to support applications in sensitivity analysis, calibration, validation, and multi-model comparison (see, Barnhart et al., 2020a, b, c, for example applications). First, `terrainbento` is a Python package for multi-model analysis that provides an extensible set of 27 Landlab-built models for long-term drainage basin and landform evolution, along with general classes for handling boundary conditions through an input-file format (Barnhart et al., 2019b). Second, `umami` is used to calculate model-data comparison metrics for observed and simulated topography (Barnhart et al., 2019a)

~

320 5 Citation of Landlab and Parts of Landlab

Citation of scientific software is an outstanding challenge (e.g., Niemeyer et al., 2016). Scientific software is cited less frequently than it is used (e.g., Pan et al., 2015). Indicating a recommended citation for use of Landlab is additionally challenging

because, depending on the portion of Landlab used, the [set of](#) citations required may vary. We describe our recommendations for which citations to use, and present a tool within Landlab to improve citation discoverability.

325 Any time any part of Landlab is used, Hobley et al. (2017) should be cited; if the version used is > 1.0 , then this contribution should be additionally cited. These two citations acknowledge the development of the Landlab package itself. We also recommend that authors state the specific version of Landlab used (the version can be found by evaluating `landlab.__version__`).

Each application of Landlab may use a different set of components, each with a different citation for the software itself and general set of theory references (Table 3 and 4). Additionally, some parts of Landlab may internally use others; thus a user may
330 not easily be able to assess the entire set of elements of Landlab their application has used and what to cite for each part.

This challenge is not new. For example, it is faced by the `scipy` package, which addresses it by providing a core-package citation: Virtanen et al. (2019), and indicating that users should look to the Reference section of the documentation for additional citations. Similarly, the codes distributed through the Computational Infrastructure for Geodynamics (CIG) have a citation builder that distinguishes between citations specific to the software implementation, primary citations describing the
335 code development and numerical methods, and secondary citations that pertain to parts of the code a user may or may not have used (Kellogg et al., 2018). This example from CIG highlights a further challenge: a component may have one or more citations for for each of the following categories: (i) the theory behind the implemented idea, (ii) a description of the software implementation itself, (iii) any specialized algorithms developed for the implementation, and (iv) the first reported use of the software in a publication.

340 Should one of these or all of these be the recommended and/or required citations for a given software component? We do not think it is our role to decide which citations, if any, a component author indicates as recommended or required. Additionally, it is not our place—as the software developers behind Landlab—to determine which citations best represent the theory behind an implementation. Instead we provide two places for a component author to indicate what they think the minimum required citations are: a component attribute called `Component.cite_as` which lists required citations for a given component, and
345 a section in the component docstring that provides the broader reference context. These two categories are reflected by the two citation columns in Tables 3 and 4. Clearly, a component developer has the authority to decide exactly what to put in either of these locations.

To aid discoverability of citations, we have created the Landlab *citation registry*, a tool that compiles citation-related meta-
350 data for the specific set of Landlab components used in an application (Listing 5). The citation registry compiles citation information for all components currently instantiated in a Python session by automatically interrogating their `cite_as` properties.

5.1 Packages Built to Work With Landlab

~~Landlab was designed as a generic, extensible modelling framework for Earth surface dynamics. Because Landlab exposes BMI (BMI, Hutton and Piper, 2020a), it is compatible with the PyMT package (Hutton and Piper, 2020b)—a Python package
355 that supports running and coupling models that expose a BMI. PyMT provides access to a suite of models written in multiple languages (e.g., Python, fortran, c++) and a standard interface for initializing and running—~~

Listing 1. Using the Landlab citation registry.

```
import landlab

# Do your work, using the parts of
# Landlab you need.
# Do your work, using the parts of Landlab you need.

# When you are done, write citations
# to a file.
# When you are done, write citations to a file.
w = landlab.registry.format_citations()
with open("citations.bib", "w") as f:
    f.write(w)

# This will produce Bibtex formatted
# citations for all Landlab components
# that you currently have instantiated.
# This will produce Bibtex-formatted citations for all
# Landlab components that you currently have
# instantiated.

# For example, the Bibtex contents below
# will result from a script that only
# imports Landlab.
# For example, the Bibtex contents below lists the
# first entry from a script that only imports Landlab
# (this contribution would also be listed).

# Citations
## landlab
@article{hobley2017creative,
AUTHOR = {
Hobley, D. E. J. and Adams, J. M. and
Nudurupati, S. S. and Hutton,
E. W. H. and Gasparini, N. M. and
Hobley, D. E. J. and Adams, J. M. and Nudurupati,
S. S. and Hutton, E. W. H. and Gasparini, N. M. and
Istanbulluoglu, E. and Tucker, G. E.
},
TITLE = {
Creative computing with Landlab: an
open-source toolkit for building,
coupling, and exploring two-dimensional
numerical models of Earth-surface
dynamics
Creative computing with Landlab: an open-source
toolkit for building, coupling, and exploring two-
dimensional numerical models of Earth-surface dynamics
},
JOURNAL = {Earth Surface Dynamics},
VOLUME = {5},
YEAR = {2017},
NUMBER = {1},
PAGES = {21--46},
URL = {
https://www.earth-surf-dynam.net/5/21/2017/
}
}
```


In addition, two packages have been built using Landlab to support applications in sensitivity analysis, calibration, validation, and multi-model comparison (see, Barnhart et al., 2020b; ?, e, for example applications). First, `terrainbento` is a Python package for multi-model analysis that provides an extensible set of 27 Landlab-built models for long-term drainage basin and landform evolution, along with general classes for handling boundary conditions through an input-file format (Barnhart et al., 2019b). Second, `umami` is used to calculate model-data comparison metrics for observed and simulated topography (Barnhart et al., 2019a).

6 Lessons on Geoscientific Software Development

In this section we highlight several lessons about software development we have learned in the processes of supporting and improving Landlab v1.0 to its current v2.0 state and working with the growing community of users.

We reflect on these lessons because the production of research software is itself research and there are many aspects of scientific software which are distinct from other software, notably (i) that the development lifecycle includes additional stages because the methods used to implement a piece of software may not exist at the outset of a project, (ii) requirements evolve because they are part of the research, and (iii) the state of the scientific field may be complex and evolving (e.g., Carver et al., 2016).

6.1 Value of Testing

The development of docstring and unit tests within Landlab was motivated by following software development best practices (e.g., Wilson et al., 2014, 2017). That is, our focus was on ensuring that the package behaves as described and, where an analytical solution exists, that Landlab correctly solves it. While using a testing suite is standard in many software development contexts, it is relatively uncommon in scientific software development (e.g., Prabhu et al., 2011). Tests do not ensure that elements of the Landlab software represent the truth, or guarantee that a model is appropriate for a specific application; in other words, Landlab cannot and does not attempt to *validate* (sensu Schlesinger et al., 1979) the assumptions of its components. Instead, the tests *verify* (Schlesinger et al., 1979) that the software is behaving as expected and that numerical methods are solving stated equations reliably. Through coupled use of an automatic testing suite and continuous integration we ensure that changes to the code base do not break existing tests.

The process of developing Landlab, working with its user community, and revising it to v2.0 illustrated another, obvious in retrospect, benefit of the tests: developing a set of tests for the package interface and numerical behavior *make it possible to refactor*. Without these tests, it would have been much more difficult to implement beneficial revisions (such as refactoring the model grid to derive from the graph-based class).

Writing effective unit tests that ensure Landlab components reliably solve their equations under a variety of initial and boundary conditions not a trivial task. When a set of equations that a component solves have an analytical solution then the numerics of a component can be verified based on the ability to reproduce such a relationship (e.g., stream power erosion produces a known slope-area relationship Willgoose et al., 1991). When such analytical predictions do not exist—as is often

the case—a more detailed analysis of the equations must be performed in order to create a full verification test. Even in the
390 absence of such analytical solutions, however, many existing Components have made headway during development simply by
testing for mass balance and timestep consistency, and the value of such simplifications should not be ignored.

In contrast, it is much easier to design and implement tests for the Landlab *interface* (e.g., when an invalid value is passed
to a component, is the correct type of error raised). In general, designing a thorough set of tests is a learned skill that requires
thinking through many edge cases of model behavior.

395 **6.2 Collaborative Development of Research Software Requires Many Skills**

Scientific software development requires distinct skills. Based on working with community user-developers and onboarding
new members of the core development team, we describe the set of skills that are needed to interact with a project like
Landlab as a user-developer. Our intention here is to document a concrete example so that efforts to create scientific software
development curricula can be based on use-cases. In the case of Landlab, the skills required to contribute to the project include:

- 400 1. Python programming, including functions, classes, and basic package organization.
2. Fundamental elements of version control using git (branching, commits).
3. GitHub for collaboration (issues trackers, merging, pull requests, managing forks, code reviews).
4. Package dependency management (currently implemented with conda environments).
5. Conceptual design and practical implementation of unit tests.
- 405 6. ReStructured text syntax for creating documentation.

In addition, there are a number of skills that not all user-developers need, but are necessary to have within the project team
in order to maintain continuous integration, documentation, building binaries, and distributing (e.g., `sphinx`, configuring and
debugging continuous integration platforms).

The importance of these skills is highlighted in the context of *technical debt*, or the cost of implementing a fast and easy
410 solution now, as opposed to a better approach that may take longer. For example, we have found that it is much easier to create
content than to make it accessible (this observation motivated the restructuring of the documentation described in Section 4.4).
It is also easier to write code than to write thorough and effective tests for it, yet omitting tests greatly increases the risk of
serious bugs, which can invalidate the research that the software is meant to facilitate.

6.3 Balancing the Burden on Developers and Users

415 Open-source software (scientific or otherwise) commonly has many more users than developers or user-developers (e.g.,
`numpy`). Under those circumstances, moderate investments in developer time are justified to make use faster or more intu-
itive for users. However, Landlab is a case with slightly different dynamics, which are worth reflecting on. Landlab is an

example of a niche scientific software package with a relatively small development community. Here we reflect on some of the development dynamics of this type of scientific software and the relative burdens for use on developers and users.

420 Our goal is to create an extensible software package that solves a variety of Earth surface dynamics problems and is accessible to undergraduates and active researchers, *and* to support community members in contributing to the code (transitioning from users to user-developers). Effectively serving the community requires a balance between minimizing technical debt (by enforcing standards within the code base), while also making development and contribution accessible to inexperienced but motivated community members.

425 One aspect of our approach, inspired by experience working with community members, is to be flexible with the software engineering and interface standards. This includes relaxing standards when necessary. For example, while a strict interface standard for components would likely reduce technical debt, our experience is that such rigidity would raise a substantial barrier to community contribution. This means that we need to strike a balance in our design principles between standardization and flexibility (e.g., relaxing the standard for the `run_one_step` method described in Section 4.2).

430 Second, we embrace the idea that good is better than not at all. That is, some tests are better than none, meaningful tests are better than non-meaningful ones, and barebones documentation is better than none. We find that documentation improves the most when users try to use it, find that it is insufficient or unclear, and interact with developers through the online and open GitHub Issues forum. Users and developers then together revise the text. Because the development team is small and supported primarily by grants, we rely on users to indicate where improvements must be made.

435 7 How Do I Get Started?

We highly encourage all contributions to Landlab. The package is designed as an extensible piece of community software and we look forward to it growing to meet community needs. Common ways that an interested individual might get started include: identifying or making improvements to the documentation and example notebooks, finding and fixing bugs, and describing and creating desired features—such as new components. For information about how to get started, visit the website
440 at <https://landlab.readthedocs.io/>.

8 Conclusions

Landlab v2.0 provides the community with a robust and extensible package for modelling Earth surface dynamics. It is distributed as source code and as pre-packaged binaries for Linux, MacOS, and Windows. An extensive set of unit tests ensure reliability of the code base. This version provides substantial improvements over the v1.0 including (i) a revised set of model
445 grid classes, (ii) updates to the component interface, (iii) ~~30~~31 new components, (iv) expanded and consolidated documentation, and (v) a tool for identifying appropriate citations. The backward-compatibility breaking changes made in Landlab v2.0 reflect changes necessary based on use and development of the package. The modular design of Landlab means that developers only need to create the new piece they need, and researchers can mix and match components to create a desired model.

As a tested, version-controlled, and documented software package, Landlab reduces barriers to computational modelling and
450 supports reproducible research.

Code availability. The Landlab source code is hosted on GitHub at <https://github.com/landlab/landlab>. Our documentation can be found at <https://landlab.readthedocs.io/>. Prepackaged binaries are distributed through PyPI (<https://pypi.org/project/landlab/>) and conda-forge (<https://anaconda.org/conda-forge/landlab>). The v2.0 version of the software and a PDF of the documentation are provided as a supplement to this contribution and are archived with Zenodo (Hutton et al., 2020).

455 *Author contributions.* KRB and EWHH led the design and v2.0 refactoring of the Landlab package with input from all co-authors. KRB wrote the original draft of the manuscript, with input from all co-authors. All authors edited the manuscript. KRB, EWHH, GET, NMG, DEJH, NJL, MM, SSN, and JMA contributed to the Landlab code base. All authors designed and taught short courses which provided usability testing and resulted in critical improvements to package architecture and documentation. CB expanded accessibility of Landlab using advanced cyberinfrastructure by leading integration of Landlab with the Hydroshare platform. GET, NMG, EI, and EWHH conceptualized
460 Landlab and created its prototype. GET, NMG, EI, and DEJH acquired the core funding to support Landlab, with additional funding acquired by KRB, CB, and NJL.

Competing interests. The authors declare no competing interests.

Acknowledgements. Landlab was supported by the following US National Science Foundation awards: 1147454 (GET), 1450409 (GET), 1147519 (NMG), 1450338 (NMG), 1148305 (EI), 1450412 (EI), 1246761 (through an NCED2 postdoctoral fellowship to DEJH), 1725774
465 (an EAR postdoctoral fellowship to KRB), and 1902600 (CB). Landlab is additionally supported by the Community Surface Dynamics Modeling System (NSF Award Numbers 1226297 and 1831623). DEJH acknowledges the support from a Marie Curie/Ser Cymru II Cofund Research Fellowship 663830-CU-035, and from a Software Sustainability Institute Fellowship. NJL and NMG acknowledge the support of a Tulane University Oliver Fund Scholar Award. [We thank Tristan Salles and Wolfgang Schwanghart for thoughtful reviews, and Simon Mudd for serving as handling editor.](#)

470 We acknowledge support from Tony Castronova and the HydroShare platform at Consortium of Universities for the Advancement of Hydrologic Science, Inc. (CUAHSI). CUAHSI supports use of Landlab on the HydroShare Platform (NSF EAR 1338606). Landlab Group members on HydroShare have freely shared research, data, training and teaching resources with Landlab and HydroShare communities. Landlab relies on free open-source package builds from TravisCI and Appveyor for our Continuous Integration. Our documentation is hosted for free by ReadTheDocs.

475 Landlab would not exist without decades of Open Source software development. In this spirit, we thank all community members who have asked questions, made Issues, commented on documentation that didn't make sense, and contributed code to the package. Below we list the results of our best efforts to compile all non-author community contributors to the Landlab package. The are (in alphabetical order): Guiseppe

Cippolla, Jon Czuba, Vanessa Gabel, Rachel Glade, Jenny Knuth, Abby Langston, David Litwin, Amanda Manaster, Allison Pfeiffer, Francis Rengers, Charlie Shobe, and Rhonda Strauch.

480 **References**

- Adams, J. M., Gasparini, N. M., Hobley, D. E., Tucker, G. E., Hutton, E. W., Nudurupati, S. S., and Istanbuloglu, E.: The Landlab v1.0 OverlandFlow component: a Python tool for computing shallow-water flow across watersheds, *Geoscientific Model Development*, 10, 1645, <https://doi.org/10.5194/gmd-10-1645-2017>, 2017.
- Adorf, C. S., Ramasubramani, V., Anderson, J. A., and Glotzer, S. C.: How to Professionally Develop Reusable Scientific Software—And
485 When Not To, *Computing in Science & Engineering*, 21, 66–79, <https://doi.org/10.1109/mcse.2018.2882355>, 2019.
- Ahnert, F.: Brief description of a comprehensive three-dimensional process-response model of landform development, *Zeitschrift für Geomorphologie Supplement Band*, 25, 29–49, 1976.
- Albert, J. S., Schoolmaster Jr, D. R., Tagliacollo, V., and Duke-Sylvester, S. M.: Barrier Displacement on a Neutral Landscape: Toward a Theory of Continental Biogeography, *Systematic Biology*, 66, 167–182, <https://doi.org/10.1093/sysbio/syw080>, 2016.
- 490 Armstrong, A. C.: A three dimensional simulation of slope forms, *Zeitschrift für Geomorphologie*, 25, 20–28, 1976.
- ASCE: The ASCE Standardized Reference Evapotranspiration Equation, in: Standardization of Reference Evapotranspiration Task Committee Final Report, edited by Allen, R. G. and Walter, I. A. and Elliot, R. L. and Howell, T. A. and Itenfisu, D. and Jensen, M. E., and Snyder, R. L., Technical Committee report to the Environmental and Water Resources Institute of the American Society of Civil Engineers from the Task Committee on Standardization of Reference Evapotranspiration, Reston, VA, USA, 2005.
- 495 Bandaragoda, C., Castronova, A., Istanbuloglu, E., Strauch, R., Nudurupati, S., Phuong, J., Adams, J., Gasparini, N., Barnhart, K. R., Hutton, E., Hobley, D., Tarboton, N. L., Tucker, G., David, Idaszak, R., and Wang, S.-W.: Enabling Collaborative Numerical Modeling in Earth Sciences using Knowledge Infrastructure, *Environmental Modelling and Software*, <https://doi.org/https://doi.org/10.1016/j.envsoft.2019.03.020>, 2019.
- Barnes, R., Lehman, C., and Mulla, D.: Priority-flood: An optimal depression-filling and watershed-labeling algorithm for digital elevation
500 models, *Computers and Geosciences*, 62, 117–127, <https://doi.org/10.1016/j.cageo.2013.04.024>, 2014.
- Barnhart, K., Hutton, E., and Tucker, G.: umami: A Python package for Earth surface dynamics objective function construction, *Journal of Open Source Software*, 4, 1776, <https://doi.org/10.21105/joss.01776>, 2019a.
- Barnhart, K. R., Hutton, E., Gasparini, N., and Tucker, G.: Lithology: A Landlab submodule for spatially variable rock properties, *Journal of Open Source Software*, 3, 979–2, <https://doi.org/10.21105/joss.00979>, 2018.
- 505 Barnhart, K. R., Glade, R. C., Shobe, C. M., and Tucker, G. E.: Terrainbento 1.0: a Python package for multi-model analysis in long-term drainage basin evolution, *Geoscientific Model Development*, 12, 1267–1297, <https://doi.org/10.5194/gmd-12-1267-2019>, 2019b.
- Barnhart, K. R., Tucker, G. E., Doty, S., Shobe, C. M., Glade, R. C., Rossi, M. W., and Hill, M. C.: Inverting topography for landscape evolution model process representation: Part 1. Conceptualization and sensitivity analysis, *Journal of Geophysical Research-Earth Surface*, p. e2018JF004961, <https://doi.org/10.1029/2018JF004961>, 2020a.
- 510 Barnhart, K. R., Tucker, G. E., Doty, S., Shobe, C. M., Glade, R. C., Rossi, M. W., and Hill, M. C.: Inverting topography for landscape evolution model process representation: Part 2. Calibration and validation, *Journal of Geophysical Research-Earth Surface*, p. e2018JF004963, <https://doi.org/10.1029/2018JF004963>, 2020b.
- Barnhart, K. R., Tucker, G. E., Doty, S., Shobe, C. M., Glade, R. C., Rossi, M. W., and Hill, M. C.: Inverting topography for landscape evolution model process representation: Part 3. Determining parameter ranges for select mature geomorphic transport laws and
515 connecting changes in fluvial erodibility to changes in climate, *Journal of Geophysical Research-Earth Surface*, p. e2019JF005287, <https://doi.org/10.1029/2019JF005287>, 2020c.

- Bates, P. D., Horritt, M. S., and Fewtrell, T. J.: A simple inertial formulation of the shallow water equations for efficient two-dimensional flood inundation modelling, *Journal of Hydrology*, 387, 33–45, <https://doi.org/10.1016/j.jhydrol.2010.03.027>, 2010.
- Bras, R.: *Hydrology: An introduction to hydrologic science*, Addison-Wesley, 1990.
- 520 Braun, J. and Willett, S. D.: A very efficient $O(n)$, implicit and parallel method to solve the stream power equation governing fluvial incision and landscape evolution, *Geomorphology*, 180–181, 170–179, <https://doi.org/10.1016/j.geomorph.2012.10.008>, 2013.
- Carretier, S., Martinod, P., Reich, M., and Godderis, Y.: Modelling sediment clasts transport during landscape evolution, *Earth Surface Dynamics*, 4, 237–251, <https://doi.org/10.5194/esurf-4-237-2016>, 2016.
- Carver, J. C., Hong, N. P. C., and Thiruvathukal, G. K.: *Software engineering for science*, CRC Press, 2016.
- 525 Chen, X., Dallmeier-Tiessen, S., Dasler, R., Feger, S., Fokianos, P., Gonzalez, J. B., Hirvonsalo, H., Kousidis, D., Lavasa, A., Mele, S., Rodriguez, D. R., Šimko, T., Smith, T., Trisovic, A., Trzcinska, A., Tsanaktisidis, I., Zimmermann, M., Cranmer, K., Heinrich, L., Watts, G., Hildreth, M., Iglesias, L. L., Lassila-Perini, K., and Neubert, S.: Open is not enough, *Nature Physics*, 15, 113–119, <https://doi.org/10.1038/s41567-018-0342-2>, 2018.
- Childs, E. C.: Drainage of Groundwater Resting on a Sloping Bed, *Water Resources Research*, 7, 1256–1263, <https://doi.org/10.1029/wr007i005p01256>, 1971.
- 530 Culling, W. E. H.: Soil Creep and the Development of Hillside Slopes, *The Journal of Geology*, 71, 127–161, <https://doi.org/10.1086/626891>, 1963.
- Dask Development Team: *Dask: Library for dynamic task scheduling*, <https://dask.org>, 2016.
- Davy, P. and Lague, D.: Fluvial erosion/transport equation of landscape evolution models revisited, *Journal of Geophysical Research*, 114, F03007, <https://doi.org/10.1029/2008jf001146>, 2009.
- 535 de Almeida, G. A. M., Bates, P., Freer, J. E., and Souvignet, M.: Improving the stability of a simple formulation of the shallow water equations for 2-D flood modeling, *Water Resources Research*, 48, <https://doi.org/10.1029/2011wr011570>, 2012.
- Eagleson, P. S.: Climate, soil, and vegetation: 2. The distribution of annual precipitation derived from observed storm sequences, *Water Resources Research*, 14, 713–721, <https://doi.org/10.1029/wr014i005p00713>, 1978.
- 540 Freeman, T. G.: Calculating catchment area with divergent flow based on a regular grid, *Computers and Geosciences*, 17, 413–422, [https://doi.org/10.1016/0098-3004\(91\)90048-i](https://doi.org/10.1016/0098-3004(91)90048-i), 1991.
- Ganti, V., Passalacqua, P., and Fofoula-Georgiou, E.: A sub-grid scale closure for nonlinear hillslope sediment transport models, *Journal of Geophysical Research: Earth Surface*, 117, <https://doi.org/10.1029/2011jf002181>, 2012.
- Hobley, D. E. J., Sinclair, H. D., Mudd, S. M., and Cowie, P. A.: Field calibration of sediment flux dependent river incision, *Journal of Geophysical Research*, 116, 20161–18, <https://doi.org/10.1029/2010jf001935>, 2011.
- 545 Hobley, D. E. J., Adams, J. M., Nudurupati, S. S., Hutton, E. W. H., Gasparini, N. M., Istanbuluoglu, E., and Tucker, G. E.: Creative computing with Landlab: an open-source toolkit for building, coupling, and exploring two-dimensional numerical models of Earth-surface dynamics, *Earth Surface Dynamics*, 5, 21–46, <https://doi.org/10.5194/esurf-5-21-2017>, 2017.
- Howard, A. D.: A detachment-limited model of drainage basin evolution, *Water Resources Research*, 30, 2261–2285, <https://doi.org/10.1029/94wr00757>, 1994.
- 550 Hoyer, S. and Hamman, J.: xarray: N-D labeled Arrays and Datasets in Python, *Journal of Open Research Software*, 5, <https://doi.org/10.5334/jors.148>, 2016.
- Hunter, J. D.: Matplotlib: A 2D Graphics Environment, *Computing in Science & Engineering*, 9, 90–95, <https://doi.org/10.1109/mcse.2007.55>, 2007.

- 555 Hutton, E. W. and Syvitski, J. P.: Sedflux 2.0: An advanced process-response model that generates three-dimensional stratigraphy, *Computers & Geosciences*, 34, 1319–1337, <https://doi.org/10.1016/j.cageo.2008.02.013>, 2008.
- Hutton, E. W. H. and Piper, M.: *csdms/bmi-python: v2.0*, <https://doi.org/10.5281/zenodo.3647556>, 2020a.
- Hutton, E. W. H. and Piper, M.: *csdms/pymt: The Python Modeling Toolkit*, <https://doi.org/10.5281/zenodo.3644240>, 2020b.
- Hutton, E. W. H., Hobley, D. E. J., Barnhart, K. R., Tucker, G. E., Nudurupati, S. S., Adams, J. M., Gasparini, N. M., Shobe, C. M., Strauch,
560 R., Knuth, J., Lyons, N. J., Glade, R. C., Giuseppicipolla95, Manaster, A., Mouchene, M., and Rengers, F.: *landlab/landlab v2.0.0 Mrs. Weasley*, <https://doi.org/10.5281/zenodo.595872>, 2020.
- Hwang, L., Fish, A., Soito, L., Smith, M., and Kellogg, L. H.: Software and the scientist: Coding and citation practices in geodynamics, *Earth and Space Science*, 4, 670–680, <https://doi.org/10.1002/2016EA000225>, 2017.
- Johnstone, S. A. and Hilley, G. E.: Lithologic control on the form of soil-mantled hillslopes, *Geology*, 43, 83–86,
565 <https://doi.org/10.1130/g36052.1>, 2015.
- Julien, P. Y., Saghafian, B., and Ogden, F. L.: Raster-based hydrologic modeling of spatially-varied surface runoff, *Journal of the American Water Resources Association*, 31, 523–536, <https://doi.org/10.1111/j.1752-1688.1995.tb04039.x>, 1995.
- Kellogg, L. H., Hwang, L. J., Gassmoller, R., Bangerth, W., and Heister, T.: The Role of Scientific Communities in Creating Reusable Software: Lessons From Geophysics, *Computing in Science & Engineering*, 21, 25–35, <https://doi.org/10.1109/mcse.2018.2883326>, 2018.
- 570 Kluyver, T., Ragan-Kelley, B., Pérez, F., Granger, B., Bussonnier, M., Frederic, J., Kelley, K., Hamrick, J., Grout, J., Corlay, S., Ivanov, P., Avila, D., Abdalla, S., and Willing, C.: Jupyter Notebooks—a publishing format for reproducible computational workflows, in: *Positioning and Power in Academic Publishing: Players, Agents and Agendas*, edited by Loizides, F. and Schmidt, B., pp. 87 – 90, IOS Press, 2016.
- Krekel, H., Oliveira, B., Pfanschmidt, R., Bruynooghe, F., Laughner, B., and Bruhin, F.: *pytest 5.3.2*, <https://github.com/pytest-dev/pytest>, 2004.
- 575 Lai, J. and Anders, A. M.: Modeled Postglacial Landscape Evolution at the Southern Margin of the Laurentide Ice Sheet: Hydrological Connection of Uplands Controls the Pace and Style of Fluvial Network Expansion, *Journal of Geophysical Research: Earth Surface*, 123, 967–984, <https://doi.org/10.1029/2017JF004509>, 2018.
- Laio, F., Porporato, A., Ridolfi, L., and Rodriguez-Iturbe, I.: Plants in water-controlled ecosystems: active role in hydrologic processes and response to water stress II. Probabilistic soil moisture dynamics, *Advances in Water Resources*, 24, 707–723, [https://doi.org/10.1016/s0309-1708\(01\)00005-7](https://doi.org/10.1016/s0309-1708(01)00005-7), 2001.
- 580 Lambeck, K.: *Geophysical Geodesy: The Slow Deformations of the Earth*, Clarendon Oxford, 1988.
- Langston, A. L. and Tucker, G. E.: Developing and exploring a theory for the lateral erosion of bedrock channels for use in landscape evolution models, *Earth Surface Dynamics*, 6, 1—27, <https://doi.org/10.5194/esurf-6-1-2018>, 2018.
- Litwin, D., Tucker, G., Barnhart, K., and Harman, C.: *GroundwaterDupuitPercolator: A Landlab component for groundwater flow*, *Journal of Open Source Software*, 5, 1935, <https://doi.org/10.21105/joss.01935>, 2020.
- 585 Lyons, N. J., Val, P., Albert, J. S., Willenbring, J. K., and Gasparini, N. M.: Topographic controls on divide migration, stream capture, and diversification in riverine life, *Earth Surface Dynamics*, <https://doi.org/10.5194/esurf-2019-55>, 2019.
- Lyons, N. J., Albert, J. S., and Gasparini, N. M.: *SpeciesEvolver: A Landlab component to evolve life in simulated landscapes*, *Journal of Open Source Software*, <https://doi.org/10.21105/joss.02066>, 2020.
- 590 Mandli, K. T., Ahmadi, A. J., Berger, M., Calhoun, D., George, D. L., Hadjimichael, Y., Ketcheson, D. I., Lemoine, G. I., and LeVeque, R. J.: *Clawpack: building an open source ecosystem for solving hyperbolic PDEs*, *PeerJ Computer Science*, 2, e68, <https://doi.org/10.7717/peerj-cs.68>, 2016.

- Marçais, J., Dreuzy, J.-R. d., and Erhel, J.: Dynamic coupling of subsurface and seepage flows solved within a regularized partition formulation, *Advances in Water Resources*, 109, 94–105, <https://doi.org/10.1016/j.advwatres.2017.09.008>, 2017.
- 595 McKinney, W.: Data Structures for Statistical Computing in Python, in: *Proceedings of the 9th Python in Science Conference*, edited by van der Walt, S. and Millman, J., pp. 51 – 56, 2010.
- Niemeyer, K. E., Smith, A. M., and Katz, D. S.: The Challenge and Promise of Software Citation for Credit, Identification, Discovery, and Reuse, *Journal of Data and Information Quality (JDIQ)*, 7, 16, <https://doi.org/10.1145/2968452>, 2016.
- O’Callaghan, J. F. and Mark, D. M.: The extraction of drainage networks from digital elevation data, *Computer Vision, Graphics, and Image Processing*, 28, 323–344, [https://doi.org/10.1016/s0734-189x\(84\)80011-0](https://doi.org/10.1016/s0734-189x(84)80011-0), 1984.
- 600 Pan, X., Yan, E., Wang, Q., and Hua, W.: Assessing the impact of software on science: A bootstrapped learning of software entities in full-text papers, *Journal of Informetrics*, 9, 860–871, <https://doi.org/10.1016/j.joi.2015.07.012>, 2015.
- Peckham, S. D., Hutton, E. W. H., and Norris, B.: A component-based approach to integrated modeling in the geosciences The design of CSDMS, *Computers and Geosciences*, 53, 3–12, <https://doi.org/10.1016/j.cageo.2012.04.002>, 2013.
- 605 Pérez, F. and Granger, B. E.: IPython: A System for Interactive Scientific Computing, *Computing in Science Engineering*, 9, 21–29, <https://doi.org/10.1109/mcse.2007.53>, 2007.
- Perron, J. T.: Numerical methods for nonlinear hillslope transport laws, *Journal of Geophysical Research*, 116, 23–13, <https://doi.org/10.1029/2010jg001801>, 2011.
- Perron, J. T. and Royden, L.: An integral approach to bedrock river profile analysis, *Earth Surface Processes and Landforms*, 38, 570–576, <https://doi.org/10.1002/esp.3302>, 2012.
- 610 Poisot, T.: Best publishing practices to improve user confidence in scientific software, *Ideas in Ecology and Evolution*, 8, <https://doi.org/10.4033/iee.2015.8.8.f>, 2015.
- Polakow, D. A. and Dunne, T. T.: Modelling fire-return interval T: stochasticity and censoring in the two-parameter Weibull model, *Ecological Modelling*, 121, 79–102, [https://doi.org/10.1016/s0304-3800\(99\)00074-5](https://doi.org/10.1016/s0304-3800(99)00074-5), 1999.
- 615 Prabhu, P., Zhang, Y., Ghosh, S., August, D. I., Huang, J., Beard, S., Kim, H., Oh, T., Jablin, T. B., Johnson, N. P., Zoufaly, M., Raman, A., Liu, F., and Walker, D.: A survey of the practice of computational science, 2011 International Conference for High Performance Computing, Networking, Storage and Analysis (SC), p. 1, <https://doi.org/10.1145/2063348.2063374>, 2011.
- Quinn, P., Beven, K., Chevallier, P., and Planchon, O.: The prediction of hillslope flow paths for distributed hydrological modelling using digital terrain models, *Hydrological Processes*, 5, 59–79, <https://doi.org/10.1002/hyp.3360050106>, 1991.
- 620 Rengers, F. K., McGuire, L. A., Kean, J. W., Staley, D. M., and Hobley, D. E. J.: Model simulations of flood and debris flow timing in steep catchments after wildfire, *Water Resources Research*, 52, 6041–6061, <https://doi.org/10.1002/2015wr018176>, 2016.
- Rocklin, M.: Dask: Parallel Computation with Blocked algorithms and Task Scheduling, in: *Proceedings of the 14th Python in Science Conference*, edited by Huff, K. and Bergstra, J., pp. 130 – 136, 2015.
- Schlesinger, S., Crosbie, R. E., Gagné, R. E., Innis, G. S., Lalwani, C. S., Loch, J., Sylvester, R. J., Wright, R. D., Kheir, N., and Bartos, D.: Terminology for model credibility, *Simulation*, 32, 103–104, <https://doi.org/10.1177/003754977903200304>, 1979.
- 625 Schmid, M., Ehlers, T. A., Werner, C., Hickler, T., and Fuentes-Espoz, J.-P.: Effect of changing vegetation and precipitation on denudation–Part 2: Predicted landscape response to transient climate and vegetation cover over millennial to million-year timescales, *Earth Surface Dynamics*, 6, 859–881, <https://doi.org/10.5194/esurf-6-859-2018>, 2018.
- Seabold, S. and Perktold, J.: statsmodels: Econometric and statistical modeling with python, in: *9th Python in Science Conference*, 2010.

- 630 Sharman, G. R., Sylvester, Z., and Covault, J. A.: Conversion of tectonic and climatic forcings into records of sediment supply and provenance, *Scientific reports*, 9, 1–7, <https://doi.org/10.1038/s41598-019-39754-6>, 2019.
- Shelef, E. and Hilley, G. E.: Impact of flow routing on catchment area calculations, slope estimates, and numerical simulations of landscape development, *Journal of Geophysical Research-Earth Surface*, 118, 2105–2123, <https://doi.org/10.1002/jgrf.20127>, 2013.
- Shobe, C. M., Tucker, G. E., and Barnhart, K. R.: The SPACE 1.0 model: a Landlab component for 2-D calculation of sediment transport, bedrock erosion, and landscape evolution, *Geoscientific Model Development*, 10, 4577–4604, <https://doi.org/10.5194/gmd-10-4577-2017>, 2017.
- Singer, M. B., Michaelides, K., and Hobley, D. E. J.: STORM 1.0: a simple, flexible, and parsimonious stochastic rainfall generator for simulating climate and climate change, *Geoscientific Model Development*, 11, 3713–3726, <https://doi.org/10.5194/gmd-11-3713-2018>, 2018.
- 640 Strauch, R., Istanbuluoglu, E., Nudurupati, S. S., Bandaragoda, C., Gasparini, N. M., and Tucker, G. E.: A hydroclimatological approach to predicting regional landslide probability using Landlab, *Earth Surface Dynamics*, 6, 49–75, <https://doi.org/10.5194/esurf-6-49-2018>, 2018.
- Tarboton, D. G.: A new method for the determination of flow directions and upslope areas in grid digital elevation models, *Water Resources Research*, 33, 309–319, <https://doi.org/10.1029/96wr03137>, 1997.
- 645 Taschuk, M. and Wilson, G.: Ten simple rules for making research software more robust, *PLoS computational biology*, 13, <https://doi.org/10.1371/journal.pcbi.1005412>, 2017.
- The Turing Way Community, Arnold, B., Bowler, L., Gibson, S., Herterich, P., Higman, R., Krystalli, A., Morley, A., O'Reilly, M., and Whitaker, K.: *The Turing Way: A Handbook for Reproducible Data Science*, <https://doi.org/10.5281/zenodo.3233986>, This work was supported by The UKRI Strategic Priorities Fund under the EPSRC Grant EP/T001569/1, particularly the "Tools, Practices and Systems" theme within that grant, and by The Alan Turing Institute under the EPSRC grant EP/N510129/1., 2019.
- 650 Tucker, G. E., Catani, F., Rinaldo, A., and Bras, R. L.: Statistical analysis of drainage density from digital terrain data, *Geomorphology*, 36, 187–202, [https://doi.org/10.1016/s0169-555x\(00\)00056-8](https://doi.org/10.1016/s0169-555x(00)00056-8), 2001a.
- Tucker, G. E., Lancaster, S. T., Gasparini, N. M., and Bras, R. L.: The Channel-Hillslope Integrated Landscape Development Model (CHILD), in: *Landscape Erosion and Evolution Modeling*, pp. 349–388, Springer US, Boston, MA, USA, 2001b.
- 655 Tucker, G. E., Lancaster, S. T., Gasparini, N. M., Bras, R. L., and Rybarczyk, S. M.: An object-oriented framework for distributed hydrologic and geomorphic modeling using triangulated irregular networks, *Computers & Geosciences*, 27, 959–973, [https://doi.org/10.1016/s0098-3004\(00\)00134-5](https://doi.org/10.1016/s0098-3004(00)00134-5), 2001c.
- Tucker, G. E., Hobley, D. E. J., McCoy, S. W., and Struble, W. T.: Modeling the Shape and Evolution of Normal-Fault Facets, *Journal of Geophysical Research: Earth Surface*, 125, e2019JF005305, <https://doi.org/10.1029/2019JF005305>, 2020.
- 660 Virtanen, P., Gommers, R., Oliphant, T. E., Haberland, M., Reddy, T., Cournapeau, D., Burovski, E., Peterson, P., Weckesser, W., Bright, J., van der Walt, S. J., Brett, M., Wilson, J., Jarrod Millman, K., Mayorov, N., Nelson, A. R. J., Jones, E., Kern, R., Larson, E., Carey, C., Polat, İ., Feng, Y., Moore, E. W., Vand erPlas, J., Laxalde, D., Perktold, J., Cimman, R., Henriksen, I., Quintero, E. A., Harris, C. R., Archibald, A. M., Ribeiro, A. H., Pedregosa, F., van Mulbregt, P., and Contributors, S. . . : *SciPy 1.0–Fundamental Algorithms for Scientific Computing in Python*, arXiv e-prints, arXiv:1907.10121, 2019.
- 665 Whitaker, J., Khrulev, C., Huard, D., Paulik, C., Hoyer, S., Filipe, Pastewka, L., Mohr, A., Marquardt, C., Couwenberg, B., Taves, M., Whitaker, J., Cuntz, M., Bohnet, M., Brett, M., Hetland, R., Korenčiak, M., barronh, Onu, K., Helmus, J. J., Hamman, J., Barna, A.,

- fredrik I, Koziol, B., Kluyver, T., May, R., Smrekar, J., Barker, C., Gohlke, C., and Kinoshita, B. P.: Unidata/netcdf4-python: Version 1.5.3 release, <https://doi.org/10.5281/zenodo.3516272>, 2019.
- 670 Wickert, A. D.: Open-source modular solutions for flexural isostasy: gFlex v1.0, *Geoscientific Model Development*, 9, 997–1017, <https://doi.org/10.5194/gmd-9-997-2016>, 2016.
- Willgoose, G. R., Bras, R. L., and Rodriguez-Iturbe, I.: A coupled channel network growth and hillslope evolution model, 1, *Theory, Water Resources Research*, 27, 1671–1684, 1991.
- Wilson, G., Aruliah, D. A., Brown, C. T., Hong, N. P. C., Davis, M., Guy, R. T., Haddock, S. H. D., Huff, K. D., Mitchell, I. M., Plumbley, M. D., Waugh, B., White, E. P., and Wilson, P.: Best Practices for Scientific Computing, *PLoS Biology*, 12, e1001745, <https://doi.org/10.1371/journal.pbio.1001745>, 2014.
- 675 Wilson, G., Bryan, J., Cranston, K., Kitzes, J., Nederbragt, L., and Teal, T. K.: Good enough practices in scientific computing, *PLOS Computational Biology*, 13, e1005510, <https://doi.org/10.1371/journal.pcbi.1005510>, 2017.
- Wobus, C., Whipple, K., Kirby, E., Snyder, N., Johnson, J., Spyropolou, K., Crosby, B., and Sheehan, D.: Tectonics from topography: Procedures, promise, and pitfalls, *GSA Special Papers*, pp. 55–74, [https://doi.org/10.1130/2006.2398\(04\)](https://doi.org/10.1130/2006.2398(04)), 2006.
- 680 Zebari, M., Grützner, C., Navabpour, P., and Ustaszewski, K.: Relative timing of uplift along the Zagros Mountain Front Flexure (Kurdistan Region of Iraq): Constrained by geomorphic indices and landscape evolution modeling, *Solid Earth*, 10, 663–682, <https://doi.org/10.5194/se-10-663-2019>, 2019.
- Zhou, X., Istanbuluoglu, E., and Vivoni, E. R.: Modeling the ecohydrological role of aspect-controlled radiation on tree-grass-shrub coexistence in a semiarid climate, *Water Resources Research*, 49, 2872–2895, <https://doi.org/10.1002/wrcr.20259>, 2013.

Table 3. New components added since Landlab v1.0

Component	Summary	Required Citation ¹	Additional References
ChannelProfiler	Extract channel networks		
DepthDependentDiffuser	Linear, depth-dependent diffusion of topography	Barnhart et al. (2019b)	Johnstone and Hilley (2015)
DepthDependentTaylorDiffuser	Nonlinear, depth-dependent diffusion of topography	Barnhart et al. (2019b)	Johnstone and Hilley (2015); Ganti et al. (2012)
DischargeDiffuser	Diffuse sediment proportional to an implicit water discharge value		
ErosionDeposition	Fluvial erosion and transport	Barnhart et al. (2019b)	Davy and Lague (2009)
ExponentialWeatherer	Calculate weathering rate based on exponential function of soil thickness	Barnhart et al. (2019b)	Ahnert (1976); Armstrong (1976)
Flexure1D	1D lithospheric flexure under loading		
FlowAccumulator	Calculate drainage area and discharge		Braun and Willett (2013)
FlowDirectorD8	Direct flow based on D8 scheme		O'Callaghan and Mark (1984)
FlowDirectorDINF	Direct flow based on D_{∞} scheme		Tarboton (1997)
FlowDirectorMFD	Direct flow to multiple downstream receivers		Quinn et al. (1991); Freeman (1991)
FlowDirectorSteepest	Direct flow based on D4 scheme		
GroundwaterDupuitPercolator	Model flow in a shallow unconfined aquifer using the Dupuit-Forcheimer approximation	Litwin et al. (2020)	Childs (1971); Marçais et al. (2017)
HackCalculator	Calculate Hack's law parameters for drainage basins		
LakeMapperBarnes	Identify and route flow through lakes	Barnes et al. (2014)	
LandslideProbability	Simulate landslide probability of failure, mean relative wetness, and probability of saturation	Strauch et al. (2018)	
LateralEroder	Lateral erosion of fluvial channels	Langston and Tucker (2018)	
LithoLayers	Manage layered material with variable properties	Barnhart et al. (2018)	
Lithology	Manage material with spatially variable properties	Barnhart et al. (2018)	
LossyFlowAccumulator	Calculate drainage area and discharge, while permitting dynamic loss or gain of flow downstream		Braun and Willett (2013)
NormalFault	Vertical uplift on a generic fault		
PotentialityFlowRouter	Calculate a discharge field using a matrix solution		
Profiler	Extract generic profiles across a Landlab field		
SinkFillerBarnes	Fill depressions in a surface	Barnes et al. (2014)	
Space	Fluvial erosion by stream power with alluvium conservation and entrainment	Shobe et al. (2017)	
SpatialPrecipitationDistribution	Generate spatially resolved precipitation events	Singer et al. (2018)	
SpeciesEvolver	Evolve life in a landscape	Lyons et al. (2020)	Albert et al. (2016); Lyons et al. (2019)
StreamPowerSmoothThresholdEroder	Fluvial erosion with a smoothed-threshold version of stream power	Barnhart et al. (2019b)	Braun and Willett (2013)
TaylorNonLinearDiffuser	Nonlinear diffusion of topography	Barnhart et al. (2019b)	Ganti et al. (2012)
TransportLengthHillslopeDiffuser	Non-local hillslope diffusion		Davy and Lague (2009); Carretier et al. (2016)
TrickleDownProfiler	Extract profiles downstream of arbitrary points		

1. In addition to Hobley et al. (2017) and this contribution

Table 4. Landlab components in v1.0 (after Hobley et al. (2017), their Table 5)

Component	Summary	Required Citation ¹	Additional References
ChiFinder	Calculates the chi index along a channel network		Perron and Royden (2012)
DepressionFinderAndRouter	A lake filler that can route flow across depressions		Tucker et al. (2001b)
DepthSlopeProductErosion	Detachment limited fluvial erosion calculated using depth-slope product for shear stress		
DetachmentLtdErosion	General implementation of detachment limited fluvial erosion		Howard (1994)
DrainageDensity	Calculate drainage density		Tucker et al. (2001a)
FastscapeEroder	Implements fluvial erosion according to stream power, using the Fastscape algorithms		Braun and Willett (2013)
FireGenerator	Produces intervals between fire events, following a Weibull distribution		Polakow and Dunne (1999)
Flexure	Simple lithospheric flexure under loading	Hutton and Syvitski (2008)	Lambeck (1988)
FractureGridGenerator	Generate fractures in a model grid		
gFlex	A more complex flexure model, utilizing gFlex	Wickert (2016)	
KinwaveImplicitOverlandFlow	Locally implicit implementation of the two-dimensional kinematic wave model		
KinwaveOverlandFlowModel	Simple implementation of the two-dimensional kinematic wave model		
LinearDiffuser	Linear diffusion of topography		Culling (1963)
OverlandFlow	An inertial approximation of the shallow water equations for overland flow applications	Adams et al. (2017)	de Almeida et al. (2012)
OverlandFlowBates	An inertial approximation of the shallow water equations for overland flow application		Bates et al. (2010)
PerronNLDiffuse	Nonlinear hillslope diffusion		Perron (2011)
PotentialEvapotranspiration	Calculate potential evapotranspiration across a surface		ASCE (2005); Zhou et al. (2013)
PrecipitationDistribution	Generate a storm sequence of intervals and intensities		Eagleson (1978)
Radiation	Calculate total incident shortwave solar radiation		Bras (1990)
SedDepEroder	Sediment-flux-dependent shear stress based fluvial incision		Hobley et al. (2011)
SinkFiller	An algorithm to fill depressions in a surface		Tucker et al. (2001c)
SoilMoisture	Compute local inter-storm water balance and root-zone soil moisture saturation fraction		Laio et al. (2001)
SoilInfiltrationGreenAmpt	Infiltrate surface water into a soil following the Green-Ampt method	Rengers et al. (2016)	Julien et al. (1995)
SteepnessFinder	Calculates steepness indices for a channel network		Wobus et al. (2006)
StreamPowerEroder	Implements fluvial erosion according to stream power, using the Fastscape algorithms		Braun and Willett (2013)
VegCA	Cellular automata algorithm to simulate spatial organization of plant functional types		Zhou et al. (2013)
Vegetation	Calculate above-ground live and dead biomass, and leaf area index		Zhou et al. (2013)

1. In addition to Hobley et al. (2017) and this contribution.

Table 5. Dependencies and Citations

Category	Name	Citation
Core Package	bmipy	Peckham et al. (2013); Hutton and Piper (2020a)
	matplotlib	Hunter (2007)
	netcdf4	Whitaker et al. (2019)
	pyyaml	
	pyshp	
	scipy	Virtanen et al. (2019)
	statsmodels	Seabold and Perktold (2010)
	pandas	McKinney (2010)
	xarray	Hoyer and Hamman (2016)
Testing	coveralls	
	pytest	Krekel et al. (2004)
	pytest-cov	
	pyyaml	
	pytest-datadir	
Tutorials	dask	Dask Development Team (2016); Rocklin (2015)
	jupyter	
	holoviews	Pérez and Granger (2007); Kluyver et al. (2016)
	nbformat	
Development	black	
	flake8	
	isort	
Documentation	sphinx	
	sphinx_rtd_theme	
	pandoc	
	tornado	
	entrypoints	

Table 6. Boundary Condition Flag Changes

Landlab v1.0 Name	Landlab v2.0 Name
BAD_INDEX_VALUE	ModelGrid.BAD_INDEX
CORE_NODE	ModelGrid.BC_NODE_IS_CORE
FIXED_VALUE_BOUNDARY	ModelGrid.BC_NODE_IS_FIXED_VALUE
FIXED_GRADIENT_BOUNDARY	ModelGrid.BC_NODE_IS_FIXED_GRADIENT
LOOPED_BOUNDARY	ModelGrid.BC_NODE_IS_LOOPED
CLOSED_BOUNDARY	ModelGrid.BC_NODE_IS_CLOSED
ACTIVE_LINK	ModelGrid.BC_LINK_IS_ACTIVE
INACTIVE_LINK	ModelGrid.BC_LINK_IS_INACTIVE
FIXED_LINK	ModelGrid.BC_LINK_IS_FIXED

Table 7. Metadata for fields component fields

<u>Name</u>	<u>Description</u>
“dtype” [⚠]	The data type for the items in the field indicated as a Python data type (e.g., float, int).
“intent” [⚠]	A string indicating the input/output intent of the field. Valid options are “in”, “out”, and “inout”.
“optional” [⚠]	Boolean indicating whether the field is an optional input or output.
“units” [⚠]	String indicating the units of the field. Some components are unit agnostic, in which case these units can be interpreted as dimensions (see item below describing the attribute <code>Component.unit_agnostic</code>).
“mapping” [⚠]	String indicating the type of grid element associated with the field (e.g., node, link).
“doc” [⚠]	String describing the field.
